

# Solenoid Driver

## KFD2-SLD-Ex1.13100

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Logic input
- Output 100 mA at 13 V DC
- Alternating outputs for the operation of solenoids with 2 coils
- High output power for IIB gas group
- Line fault transparency (LFT)
- Test pulse immunity
- Up to SIL 3 acc. to IEC/EN 61508



### Function

This isolated barrier is used for intrinsic safety applications.  
 The device supplies power to solenoids, LEDs and audible alarms located in a hazardous area.  
 The device has 2 alternating outputs, in order to be able to operate a valve with 2 coils.  
 If both inputs are energized, then only output I is energized.  
 The device is immune to the test pulses of various control systems.  
 The line fault transparency function can display a line fault in the field by a change in impedance at the switching input of the solenoid driver.  
 A fault is signaled by LEDs acc. to NAMUR NE44 and a separate collective error message output.

### Application

#### Device function with 2 alternating outputs

The device has 2 alternating outputs, in order to be able to operate a valve with 2 coils. The table shows the behavior of input to output in relationship with the alternating outputs.

Input I	Input II	Active output
High signal	Low signal	Output I
Low signal	High signal	Output II
High signal	High signal	Output I
Low signal	Low signal	No output


#### Input current setting

For DO cards that require a minimum load, the input current can be adapted via an external resistor. The device has an auxiliary terminal at each input for connecting the external resistor.

For example

The minimum load of the DO card is 20 mA. Subtract the input current of the isolator from the minimum load of the DO card.  
 This results in  $20\text{ mA} - 6\text{ mA} = 14\text{ mA}$ . In this case, create a bypass with 14 mA. With an output voltage of the DO card of 24 V, this results in  $1714\ \Omega$ . The suitable external resistor  $R_{ext}$  is 1.5 k $\Omega$ /1 W.

## Connection

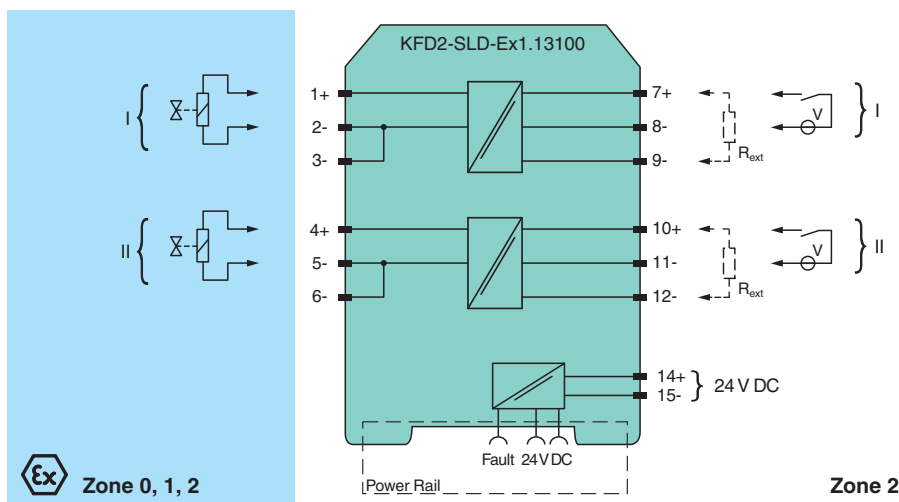

## Technical Data

### General specifications

Signal type	Digital Output
-------------	----------------

### Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Systematic capability (SC)	SC 3

### Supply

Connection	Power Rail or terminals 14+, 15-
Rated voltage	$U_r$ 19 ... 30 V DC loop powered
Input current	115 mA at 24 V, 130 $\Omega$ load
Power dissipation	1.5 W at 24 V, 130 $\Omega$ load

### Input

Connection side	control side
Connection	channel 1: terminals 7+, 8-, optional $R_{ext}$ between terminals 7 and 9 channel 2: terminals 10+, 11-, optional $R_{ext}$ between terminals 10 and 12
Input current	approx. 6 mA at 24 V DC If necessary, the current value can be increased by resistor $R_{ext}$ .
Signal level	1-signal: 15 ... 30 V DC 0-signal: 0 ... 5 V DC

### Output

Connection side	field side
Connection	channel 1: terminals 1+, 2-, 3- channel 2: terminals 4+, 5-, 6-
Internal resistor	$R_i$ approx. 64 $\Omega$
Current	$I_e$ typ. 100 mA
Voltage	$U_e$ $\geq 13$ V
Current limit	$I_{max}$ 105 mA
Open loop voltage	$U_s$ typ. 19.2 V
Load	nominal 0.08 ... 1 k $\Omega$
Switching frequency	$f$ max. 2 Hz
Energized/De-energized delay	30 ms / 30 ms
Line fault detection	
Short-circuit	< 30 $\Omega$
Open-circuit	> 10 k $\Omega$
Test current	< 4 mA

### Galvanic isolation


Input/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage 60 V <sub>eff</sub>
Input/input	basic insulation according to IEC/EN 61010-1, rated insulation voltage 60 V <sub>eff</sub>

## Technical Data


Output/Output	basic insulation according to IEC/EN 61010-1, rated insulation voltage 60 V <sub>eff</sub>	
Output/other circuits		basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Indicators/settings		
Display elements		LEDs
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2011 For further information see system description.
Degree of protection		IEC 60529:2001
Protection against electrical shock		EN 61010-1:2010
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 200 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2
Height		119 mm
Width		20 mm
Depth		115 mm
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		EXA 17 ATEX 0076X
Marking		Ⓜ II 3(1)G Ex ec [ia IIB Ga] IIC T4 Gc Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I
Voltage	U <sub>o</sub>	22.2 V
Current	I <sub>o</sub>	360 mA
Power	P <sub>o</sub>	1990 mW
Supply		
Maximum safe voltage	U <sub>m</sub>	60 V (Attention! The rated voltage can be lower.)
Input		
Maximum safe voltage	U <sub>m</sub>	60 V (Attention! The rated voltage can be lower.)
Galvanic isolation		
Output/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 60 V
Output/other circuits		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-7:2015+A1:2018 , EN 60079-11:2012
International approvals		
IECEx approval		
IECEx certificate		IECEx EXA 17.0019X
IECEx marking		Ex ec [ia IIB Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date: 2024-01-17 Date of issue: 2024-01-17 Filename: 243753\_eng.pdf

Assembly

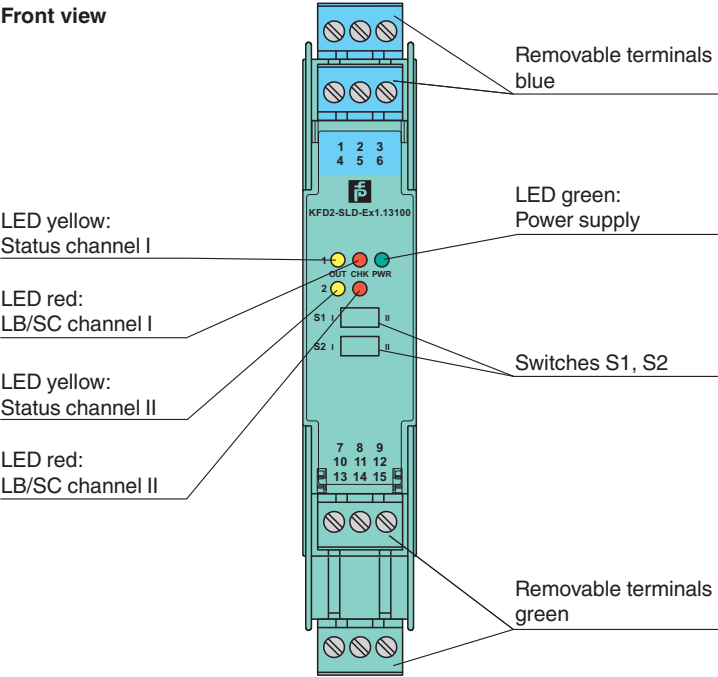

Configuration

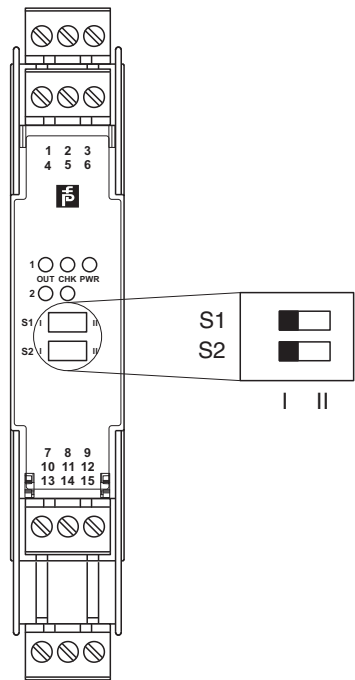

Switch settings


Switch	Function		Position
S1	Line fault detection (LB/SC)	enabled	I
		disabled	II
S2	Line fault transparency (LFT)	enabled	I
		disabled	II

Factory setting: line fault detection enabled, line fault transparency enabled


Characteristic Curve

Output characteristics

Output circuit diagram



Output characteristic

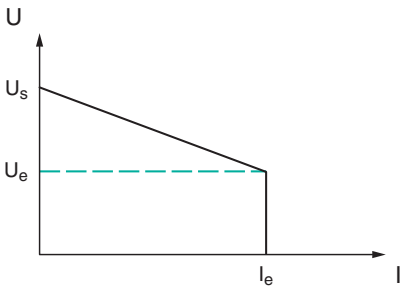

Release date: 2024-01-17 Date of issue: 2024-01-17 Filename: 243753\_eng.pdf