

RTD Converter LB5104A



- 4 channels
- Inputs Ex ia
- Mounting in Zone 2, Class I/Div.2 or in the safe area
- Converter for 2-, 3- and 4-wire RTDs (Pt100 ... Pt1000), slide wire sensors etc.
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring
- Module can be exchanged under voltage



Function

The RTD converter accepts 2-, 3-, 4-wire RTD signals (Pt100 ... Pt1000) and slide-wire sensors from the field. Ni100 through Ni1000 can also be connected. Open and short-circuit line faults are detected. The intrinsically safe inputs are galvanically isolated from the bus and the power supply.

Connection

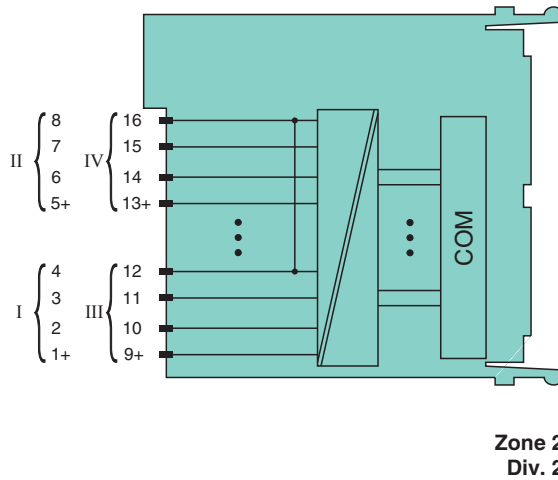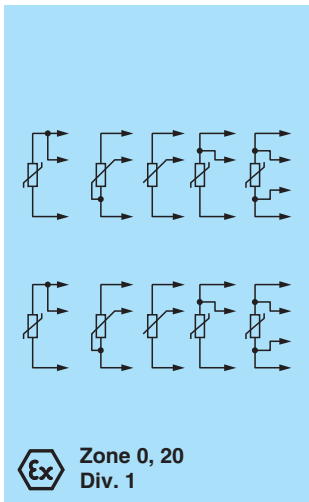

Technical Data

Slots			
Occupied slots	2		
Supply			
Connection	backplane bus		
Rated voltage	U _r	12 V DC , only in connection with the power supplies LB9***	
Power dissipation	0.35 W		
Power consumption	0.35 W		
Internal bus			
Connection	backplane bus		
Interface	manufacturer-specific bus to standard com unit		
temperature input			
Number of channels	4		

Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254810_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Suitable field devices	
Field device	resistance thermometer
Field device [2]	slide-wire sensors
Field device [3]	potentiometer
Field device interface	
Connection	2-wire sensor
Connection [2]	3-wire sensor
Connection [3]	4-wire sensor
Connection	channel I: resistance/potentiometer input 1 ... 4 channel II: resistance/potentiometer input 5 ... 8 channel III: resistance/potentiometer input 9 ... 12 channel IV: resistance/potentiometer input 13 ... 16
Measurement range	Pt100 (18-390 Ω) (500 Ω incl. line resistance) Pt200 (37-780 Ω) Pt500 (92-1952 Ω) Pt1000 (185-3905 Ω) Ni100 (69-270 Ω) Ni500 (345-1350 Ω) Ni1000 (690-2700 Ω)
Slide-wire sensor	0 ... 10 kΩ
Measuring current	200 μA
Smallest span	50 Ω for 0.1 % accuracy
Linearity error	0.1 %
Conversion time	max. 500 ms (4 channels) max. 1 s (for 4x 3-wire Pt100)
Busy after download	5 ... 15 s
Lead resistance	max. 50 Ω per strand
Line fault detection	can be switched on/off for each channel via configuration tool
Short-circuit	< 10 Ω
Open-circuit	> 1 kΩ
Transfer characteristics	
Deviation	
Influence of ambient temperature	max. 0,1 %/10 K
Indicators/settings	
LED indication	Power LED (P) green: supply Status LED (I) red: line fault (collective alarm) , red flashing: communication error
Coding	optional mechanical coding via front socket
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013
Conformity	
Electromagnetic compatibility	NE 21
Degree of protection	IEC 60529
Environmental test	EN 60068-2-14
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Damaging gas	EN 60068-2-42
Relative humidity	EN 60068-2-78
Ambient conditions	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	95 % non-condensing
Altitude	max. 2000 m
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance

Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254810_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

Technical Data

Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		IP20 when mounted on backplane
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)
Mass		approx. 150 g
Dimensions		32.5 x 100 x 102 mm (1.28 x 3.9 x 4 inch)
Data for application in connection with hazardous areas		
EU-type examination certificate		PTB 03 ATEX 2042 X
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Input		
Voltage	U _o	7.14 V
Current	I _o	70 mA
Power	P _o	123 mW (linear characteristic)
Certificate		PF 08 CERT 1234 X
Marking		⊕ II 3 G Ex nA IIC T4 Gc
Galvanic isolation		
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 EN 60079-11:2012 EN 60079-15:2010
International approvals		
ATEX approval		PTB 03 ATEX 2042 X
UL approval		E106378
Control drawing		116-0322
IECEx approval		
IECEx certificate		IECEx BVS 09.0037X
IECEx marking		Ex nA [ia Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I
General information		
System information		The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity. For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

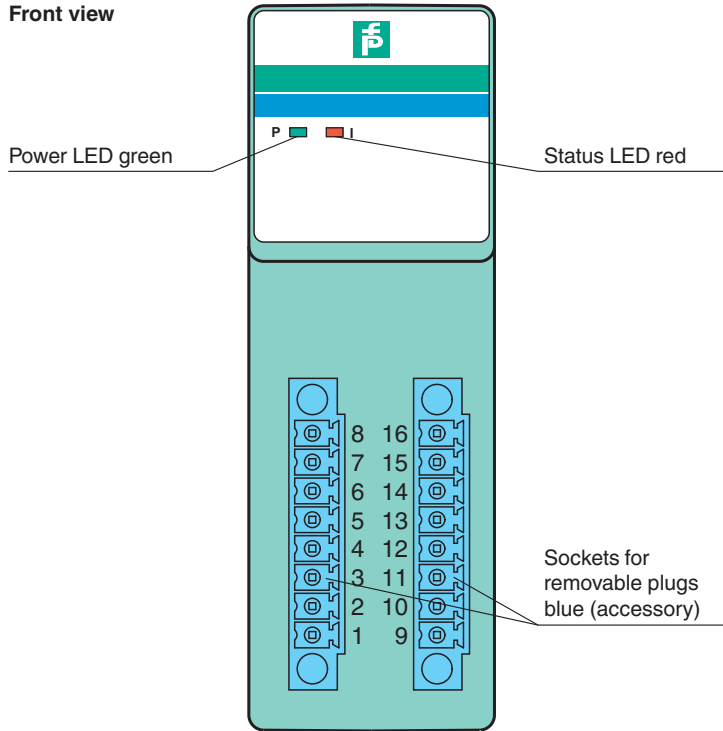

Release date: 2023-10-19 Date of issue: 2023-10-19 Filename: 254810_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com