



Digital Output with Shutdown Input FB6216E3


- 2-channel
- Outputs Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Line fault detection (LFD)
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Permanently self-monitoring
- Output with watchdog
- Output with bus-independent safety shutdown input



Function

The digital output features 2 independent channels.
 The device can be used to drive solenoids, sounders, or LEDs.
 Open and short circuit line faults are detected.
 The outputs are galvanically isolated from the bus and the power supply.
 The output can be switched off via a contact. This can be used for bus-independent safety applications.

Connection Assignment

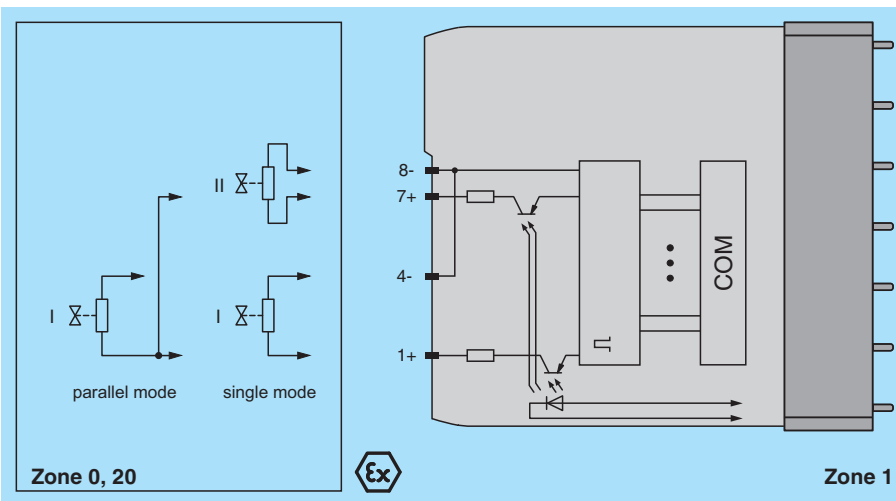

Technical Data

| Supply | | |
|------------------------|-------|---|
| Connection | | backplane bus / booster terminals |
| Rated voltage | U_r | 12 V DC , only in connection with the power supplies FB92** |
| Power dissipation | | 1.95 W |
| Power consumption | | 2.9 W |
| Internal bus | | |
| Connection | | backplane bus |
| Interface | | manufacturer-specific bus to standard com unit |
| Digital output | | |
| Number of channels | | 2 |
| Suitable field devices | | |

Release date: 2024-04-22 Date of issue: 2024-04-22 Filename: 281078_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | | |
|--|-----------|---|
| Field device | | Solenoid Valve |
| Field device [2] | | audible alarm |
| Field device [3] | | visual alarm |
| Connection | | channel I: 1+, 4/5/6/8-; channel II: 7+, 4/5/6/8- |
| Internal resistor | R_i | 258 Ω , both channels parallel 129 Ω |
| Current limit | I_{max} | 40 mA both channels parallel 80 mA |
| Open loop voltage | U_s | 23 V , both channels parallel 23 V |
| Line fault detection | | can be switched on/off for each channel via configuration tool also when turned off (every 2.5 s the valve is turned on for 2 ms) |
| Short-circuit | | < 50 Ω |
| Open-circuit | | > 10 k Ω |
| Response time | | 10 ms (depending on bus cycle time) |
| Watchdog | | within 0.5 s the device goes in safe state, e.g. after loss of communication |
| Indicators/settings | | |
| LED indication | | Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1, 2) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) Mode LED (M) white: Parallel operation of outputs |
| Coding | | optional mechanical coding via front socket |
| Directive conformity | | |
| Electromagnetic compatibility | | |
| Directive 2014/30/EU | | EN 61326-1:2013 |
| Conformity | | |
| Electromagnetic compatibility | | |
| Degree of protection | | NE 21 |
| Environmental test | | IEC 60529 |
| Shock resistance | | EN 60068-2-14 |
| Vibration resistance | | EN 60068-2-27 |
| Damaging gas | | EN 60068-2-6 |
| Relative humidity | | EN 60068-2-42 |
| Ambient conditions | | |
| Ambient temperature | | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature | | -40 ... 85 °C (-40 ... 185 °F) |
| Relative humidity | | 95 % non-condensing |
| Shock resistance | | shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18 |
| Vibration resistance | | frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance |
| Damaging gas | | designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3 |
| Mechanical specifications | | |
| Degree of protection | | IP20 (module) , a separate housing is required acc. to the system description |
| Connection | | removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²) |
| Mass | | approx. 425 g |
| Dimensions | | 28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch) |
| Data for application in connection with hazardous areas | | |
| EU-type examination certificate | | |
| Marking | | Presafe 19 ATEX 14054U Ⓔ II 2(1)G Ex db eb q [ia Ga] IIC Gb II (1)D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I |
| Output | | |
| Voltage | U_o | 24.2 V |
| Current | I_o | 108 mA |

Release date: 2024-04-22 Date of issue: 2024-04-22 Filename: 281078_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

Technical Data

| | | |
|-----------------------------------|--|---------|
| Power | P _o | 654 mW |
| Internal capacitance | C _i | 12 nF |
| Internal inductance | L _i | 0 mH |
| Output (both channels parallel) | | |
| Voltage | U _o | 24.2 V |
| Current | I _o | 216 mA |
| Power | P _o | 1308 mW |
| Internal capacitance | C _i | 24 nF |
| Internal inductance | L _i | 0 mH |
| Galvanic isolation | | |
| Output/power supply, internal bus | safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V | |
| Directive conformity | | |
| Directive 2014/34/EU | EN 60079-0:2018+AC:2020 EN 60079-1:2014 EN 60079-5:2015 EN 60079-7:2015+A1:2018 EN 60079-11:2012 | |
| International approvals | | |
| ATEX approval | Presafe 19 ATEX 14054U | |
| IECEX approval | IECEX PRE 19.0009U | |
| Approved for | Ex db eb q [ia Ga] IIC Gb [Ex ia Da] IIC [Ex ia Ma] I | |
| General information | | |
| System information | The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate. | |
| Supplementary information | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . | |

Assembly

Front view

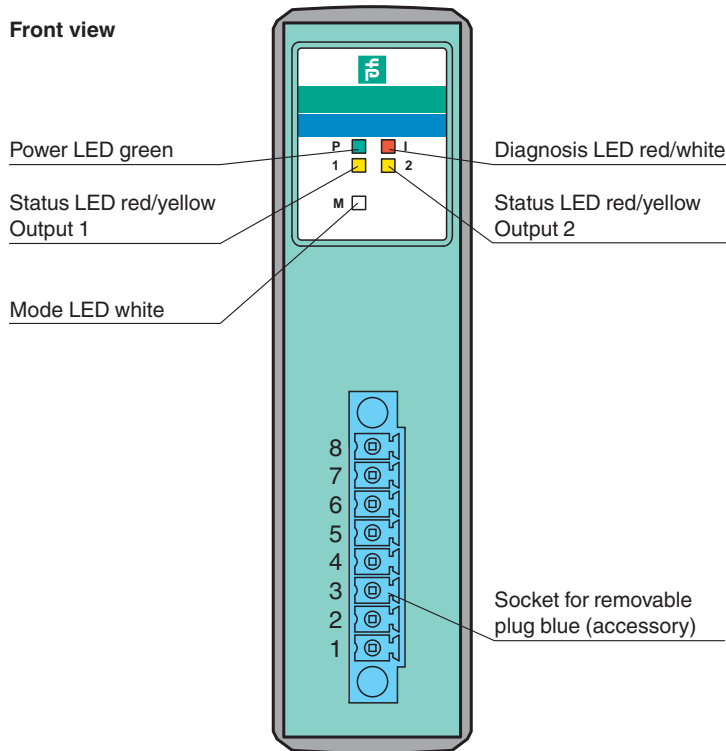

Release date: 2024-04-22 Date of issue: 2024-04-22 Filename: 281078_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


Characteristic Curve

Load calculation



R_{load} = Field loop resistance
 $U_e = U_s - R_i \times I_e$
 $I_e = U_s / (R_i + R_{load})$

Output characteristics

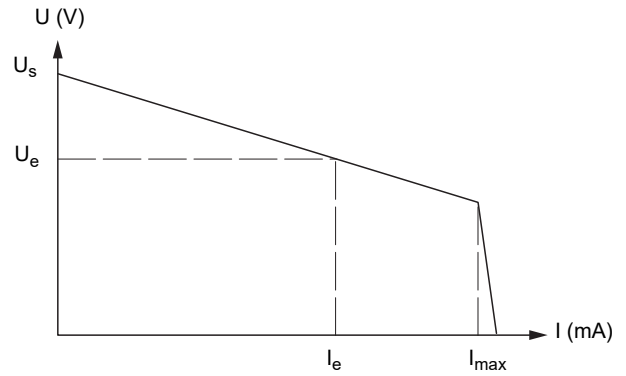

Release date: 2024-04-22 Date of issue: 2024-04-22 Filename: 281078_eng.pdf