


## Thru-beam sensor ML29-P/25/103/143



- Single-beam monitoring with extremely narrow sensor
- Integrated circuit
- Test
- Simple installation - Plug & Play
- Ideal for installation in door profiles or frames
- Light on version


Single-beam miniature sensor, ideal for installing in frames or door profiles



### Function

The narrow miniature thru-beam sensors are a small and cost-effective solution, fitting in virtually any door frame. The ML29 and ML30 series offer fast, reliable detection at a distance of up to 8.5 m. The sensors are easy to mount on the profile, either using adhesive strips or a screw. A large opening angle ensures problem-free alignment. Several sensors can be mounted in a cross formation to offer multi-beam protection.

## Dimensions

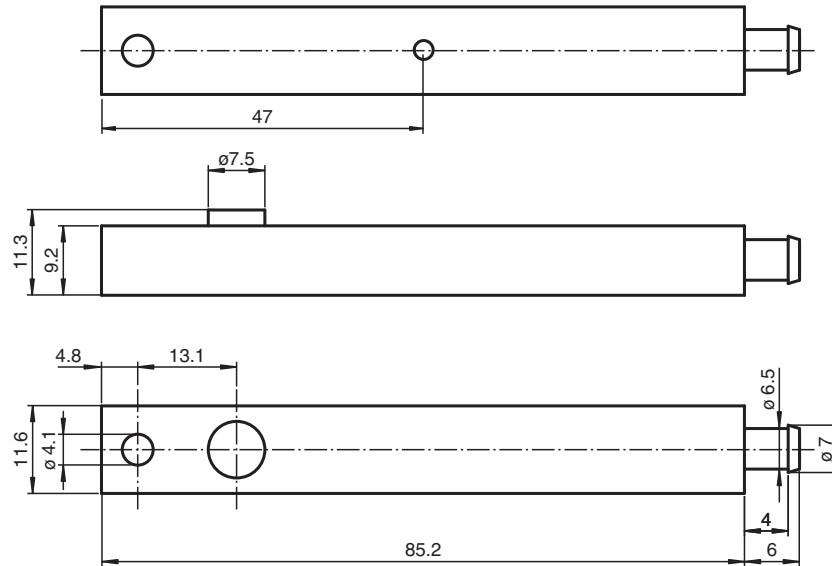

## Technical Data

### System components

Emitter	ML29-T/143
Receiver	ML29-R/25/103/143

### General specifications

Effective detection range	0 ... 6 m
Threshold detection range	8.5 m
Light source	IRED
Light type	modulated infrared light
Angle of divergence	+/- 8 °
Optical face	lateral
Ambient light limit	40000 Lux

### Functional safety related parameters

MTTF <sub>d</sub>	880 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %

### Indicators/operating means

Function indicator	LED red in receiver : lights up when receiving the light beam
--------------------	---

### Electrical specifications

Operating voltage	U <sub>B</sub>	11 ... 30 V DC
No-load supply current	I <sub>0</sub>	Emitter: ≤ 25 mA Receiver: ≤ 10 mA

### Input

Test input	Test: Transmitter switches off at +UB ≤ 5 V DC
------------	--


Release date: 2020-10-28 Date of issue: 2020-10-28 Filename: 129312\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Technical Data**

<b>Output</b>		
Switching type		light-on
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 0.1 A
Switching frequency	f	100 Hz
Response time		5 ms
<b>Conformity</b>		
Product standard		EN 60947-5-2
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN 61000-6-2, EN 61000-6-3
<b>Approvals and certificates</b>		
CCC approval		CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-20 ... 75 °C (-4 ... 167 °F)
Relative humidity		90 % , noncondensing
<b>Mechanical specifications</b>		
Degree of protection		IP65
Connection		4-pin plastic connector, 6.5 mm diameter
Material		
Housing		PMMA , black
Optical face		Plastic pane
Mass		per device 120 g

**Connection Assignment**

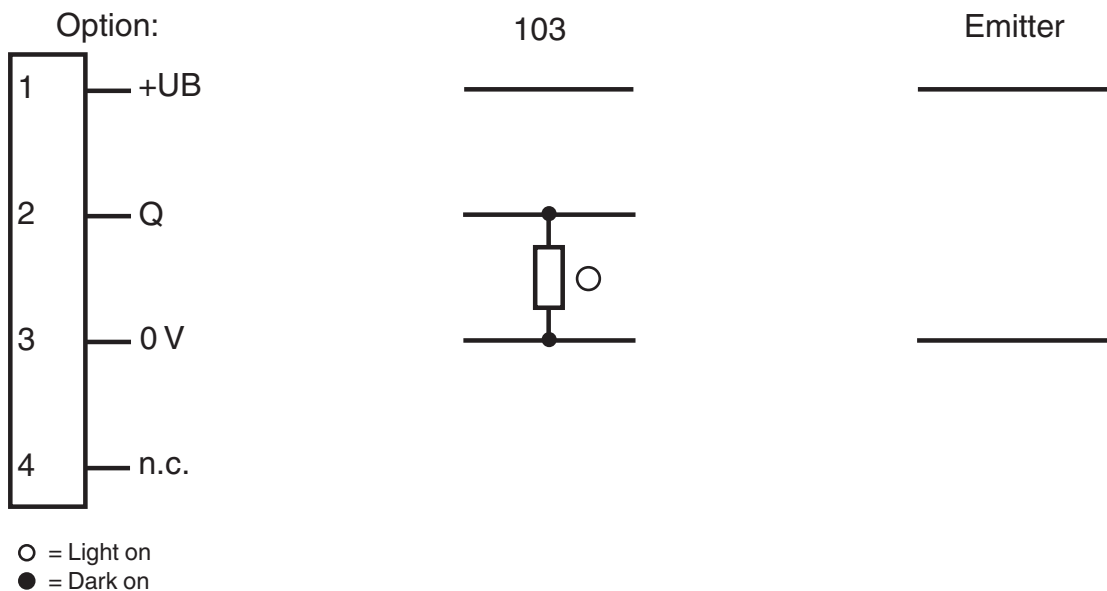

Release date: 2020-10-28 Date of issue: 2020-10-28 Filename: 129312\_eng.pdf


## Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)


## Assembly

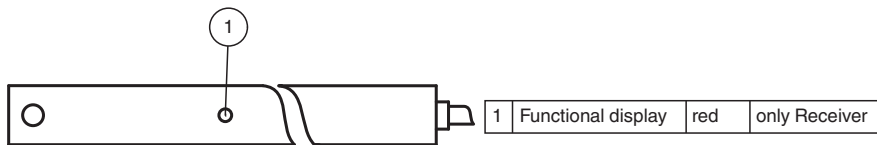


## Characteristic Curve

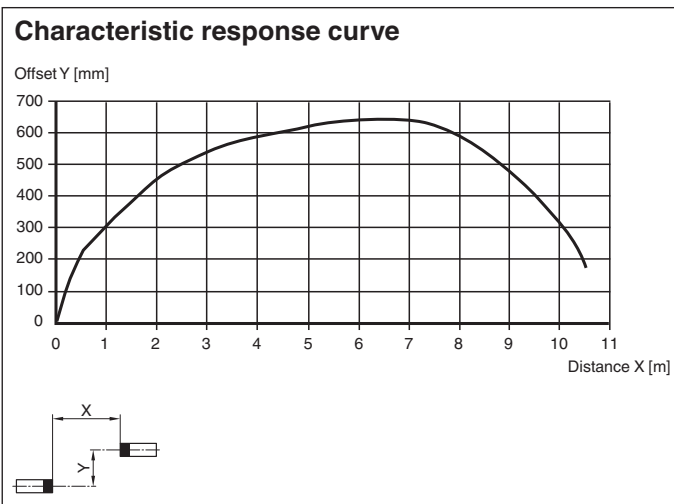

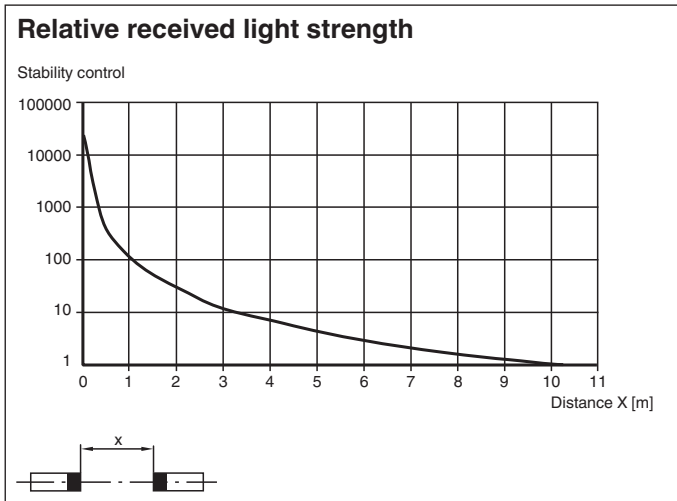


Release date: 2020-10-28 Date of issue: 2020-10-28 Filename: 129312\_eng.pdf

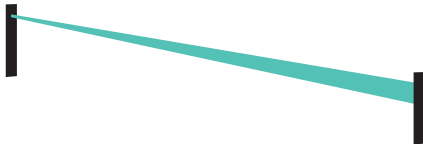

## Application



## Accessories

	<b>ML29 Front Plate</b>	Front plate for thru-beam sensors in series ML29
	<b>ML29 Kupplungsdose 6m 4polig</b>	Female cordset with 6 m cable for ML29 series sensors
	<b>ML29 Kupplungsdose 3m 4polig</b>	Female cordset with 3 m cable for ML29 series sensors

Release date: 2020-10-28 Date of issue: 2020-10-28 Filename: 129312\_eng.pdf

**Additional Information**

**Static detection:**

The thru-beam sensor detects persons and objects independently of movement and surface structure for as long as the object breaks the detection beam.

		Electronic output
Light detection /25	Person in the beam	Inactive
	No person in the beam	Active
Dark detection /59	Person in the beam	Active
	No person in the beam	Inactive

**Optics:**

The relatively wide opening angles enable the light beam switches to be installed quickly, without alignment problems. Even if there is a light distortion of the installation profiles the function is retained.

**Testing:**

Testing is used to check the function of the light beam switch.

With supply voltage  $+U_B < 5 V$  the emitter device is switched off. This simulates a light beam interruption. By means of this, the function of the light barrier can be tested easily without using a separate test input.


**Installation:**

Thanks to its small dimensions, the light beam can be fitted in a U-profile or behind a face panel. The hole diameter for both the emitter and the receiver is 8 mm.

Even fixing by means of the adhesive tape contained in the delivery package can be considered.

**Installation of twin-beam arrangement:**

A twin-beam version requires 2 emitters and receivers. Care should be taken that the beam separation is not less than 20 cm. The transmitters and receivers must be arranged in the form of a cross.

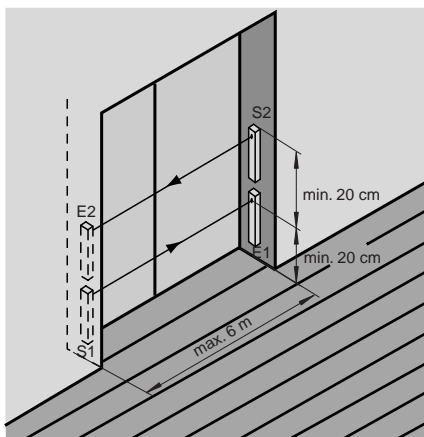

Release date: 2020-10-28 Date of issue: 2020-10-28 Filename: 129312\_eng.pdf

**Accessories**

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

**Function Principle**

The thru-beam sensor requires a pair of devices for operation, comprising a light transmitter and a light receiver. The emitter and receiver must be arranged in optical alignment with each other. The infrared light from the emitter is detected by the receiver and evaluated.

**Application**

- Person detection for automatic doors and gates

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

- Closing edge protection on sliding and revolving doors
- Threshold monitoring for elevator doors
- Step monitoring for doors on public transport vehicles
- Trigger function for restarting escalators