



## Safety light curtain SLCS30/35



- Resolution 30 mm (hand protection)
- Protection field height up to 2400 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- SIL3 (IEC 61508)
- Sensing range up to 20 m
- Degree of protection IP67
- Temperature range -35 ... 60°C (-31 ... 140 °F)
- Slim design, mounting on three sides

### Safety light curtain




### Function

The safety light curtain consists of a transmitter and a receiver unit. The protected area is formed by infrared light beams transmitted from the transmitter unit to the receiver unit. The spacing between the individual light beams determines the minimum obstruction size (30 mm) that can be reliably detected within the entire protected area range.

### Application

- Active opto-electronic protective device (AOPD) for protection of people in danger zones and high risk areas
- Hand protection from 30 mm resolution
- Finger protection from 14 mm resolution

**Dimensions**

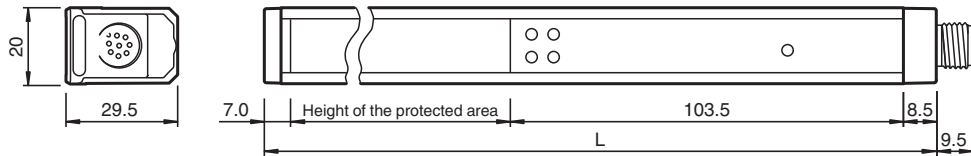

**Technical Data**

<b>General specifications</b>	
Effective detection range	5 ... 20 m
Light source	IREC
Light type	modulated infrared light , 850 nm
Protection field height	see Table 1, max. 2400 mm
Operating mode	Startup/restart disable, deactivateable
Optical resolution	30 mm
Opening angle	< 5 °
Ambient light limit	Not sensitive to ambient light in accordance with IEC 61496-2
UL File Number	E215245
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T <sub>M</sub> )	20 a
PFH <sub>d</sub>	Depending on the protection field height; see Manual
Type	4
<b>Indicators/operating means</b>	
Operation indicator	green: Power on
Function indicator	Green: OSSD ON , Red: OSSD OFF
Status indicator	Transmitter unit: LED yellow: Mode, test or error Receiver: LED yellow: Start readiness, function reserve or error
<b>Electrical specifications</b>	
Operating voltage	U <sub>B</sub> 24 V DC (-20%, +30%) ; Power supply with safe isolation: 24 V DC

Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 265788\_eng.pdf

## Technical Data

No-load supply current	$I_0$	Transmitter unit: ≤ 150 mA Receiver: ≤ 150 mA (without outputs)
Protection class		III, IEC 61140
Power consumption	$P_0$	Transmitter unit: 5 W Receiver: 15 W
<b>Input 1</b>		
Input type		Transmitter unit test
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
<b>Input 2</b>		
Input type		Transmitter unit, mode A/B
Function		Beam Code A: open or 0 V Beam Code B: 24 V DC, 5 mA
<b>Input 3</b>		
Input type		Receiver unit relay monitor
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
<b>Input 4</b>		
Input type		Receiver unit, start release
Input format		Break contact
Input current		5 mA
<b>Input 5</b>		
Input type		Receiver unit, mode A/B (see transmitter unit, mode A/B)
<b>Output</b>		
Response time		see Table 1, max. 48 ms
<b>Output 1</b>		
Output type		Receiver unit OSSD
Signal output		PNP semiconductor, monitored for short and cross circuits
Switching voltage		ON: $U_B - 2 V$ ; OFF: $< 1 V$
Switching current		ON: max. 0.1 A; OFF: $< 5 \mu A$
<b>Output 2</b>		
Output type		Receiver signal output start readiness
Signal output		PNP-semiconductor, short-circuit protected, 0.1A
<b>Conformity</b>		
Functional safety		ISO 13849-1 ; EN 61508 part1-4
Product standard		EN 61496-1 ; IEC 61496-2
Photobiological safety		Risk group 0 according to IEC 62471
<b>Approvals and certificates</b>		
CE conformity		CE
UKCA conformity		UKCA
UL approval		cULus Listed
TÜV approval		TÜV SÜD
<b>Ambient conditions</b>		
Ambient temperature		-35 ... 60 °C (-31 ... 140 °F)
Storage temperature		-35 ... 70 °C (-31 ... 158 °F)
Relative humidity		max. 95 %, not condensing
Shock resistance		10 g, 16 ms ; stationary applications only
Vibration resistance		0.35 mm, 10 ... 55 Hz ; stationary applications only
<b>Mechanical specifications</b>		
Housing length L		see table 2
Degree of protection		IP67, For indoor use only


Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 265788\_eng.pdf

## Technical Data

Connection	Transmitter unit: 4-pin, M12 x 1 connector Receiver: 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm <sup>2</sup> Max. cable length 50 m
Material	
Housing	extruded aluminum section , gold anodized
Optical face	Plastic pane , Transparent polycarbonate
Mass	see table 2
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .


## Connection

Transmitter unit:



Pin	Transmitter unit
1	24 V DC
2	Mode A/B
3	0 V DC
4	Test


Receiver unit:




Pin	Receiver unit
1	Restart Interlock (RI)
2	24 V DC
3	Relay Monitor (RM)
4	Status / Select RI-RM
5	OSSD1
6	OSSD2
7	0 V DC
8	Mode A/B

## Assembly

Transmitter unit

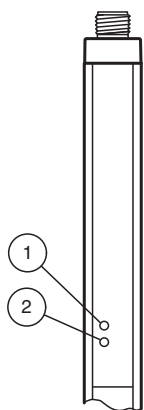


Receiver unit

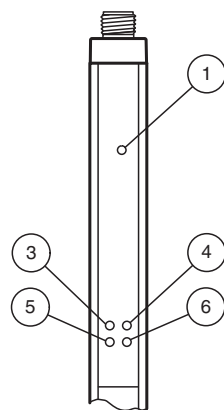

1	Power	green
2	Mode A/B, Status	yellow
3	OSSD OFF	red
4	OSSD ON	green
5	Restart/Status	yellow
6	Mode A/B	yellow

## Application

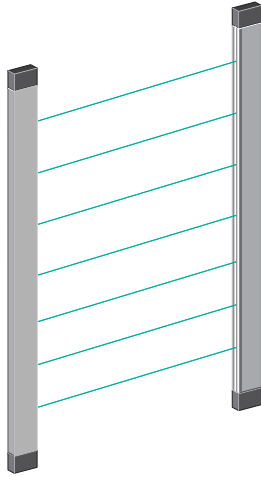

## Technical Features

Table 1: Response Time

Protection field height [mm]	Response time [ms]
100	8
200	10
300	11
400	12
500	14
600	15
700	16
800	17
900	19
1000	20
1100	21
1200	23
1300	24
1400	25
1500	26
1600	28
1700	29
1800	30
1900	32
2000	33
2100	34
2200	35
2300	37
2400	38

Table 2: Total Length and Weight

Protection field height [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
100	219	140
200	319	200
300	419	250
400	519	310
500	619	370
600	719	430
700	819	480
800	919	540
900	1019	600
1000	1119	650
1100	1219	710
1200	1319	760
1300	1425	820
1400	1525	880
1500	1625	940
1600	1725	990

Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 265788\_eng.pdf

## Technical Features

Protection field height [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
1700	1825	1050
1800	1925	1100
1900	2025	1160
2000	2125	1210
2100	2225	1270
2200	2325	1320
2300	2425	1380
2400	2525	1440

## Type Code

S	L	C	(1)	(2)	(2)	-	(3)	(3)	(3)	(3)	-	(4)	/	(5)	(5)
---	---	---	-----	-----	-----	---	-----	-----	-----	-----	---	-----	---	-----	-----

SLC	Device
SLC	Safety light curtain

(1)	Safety light curtain type
S	Self-monitoring, type 4
T	Testing, type 2








(2)	Resolution
14	14 mm
30	30 mm
60	60 mm
90	90 mm

(3)	Protection field height
100	100 mm
200	110 mm
300	300 mm
...	...
2400	2400 mm

(4)	Principle
T	Transmitter
R	Receiver



















(5)	Option
35	Extended detection range

## Accessories

	<b>TR 14/30/50/60</b>	Test rod for safety light curtain SLCT
	<b>AA SLCT-01</b>	Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains
	<b>OMH-SLCT-100-1200</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-100-2100</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-100-2500</b>	Mounting base for floor mounting and cover plate
	<b>OMH-SLCT-110-1200</b>	Mounting base for floor mounting with rear panel and cover plate
	<b>OMH-SLCT-110-1500</b>	Mounting base for floor mounting with rear panel and cover plate

Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 265788\_eng.pdf

## Accessories

	<b>OMH-SLCT-110-2100</b>	Mounting base for floor mounting with rear panel and cover plate
	<b>OMH-SLCT-120-1200</b>	Side protection for mounting base
	<b>OMH-SLCT-120-1500</b>	Side protection for mounting base
	<b>OMH-SLCT-120-2100</b>	Side protection for mounting base
	<b>OMH-SLCT-120-2500</b>	Side protection for mounting base
	<b>OMH-SLCT-200</b>	Floor mount
	<b>SLCT-M-01-1200</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>SLCT-M-01-1500</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>SLCT-M-01-2100</b>	Inclined mirror for stable 90° deflection with cover plate
	<b>OMH-SLCT-10</b>	Clamp mounting suitable for 6 mm ... 11.5 mm groove
	<b>OMH-SLCT-11</b>	Reverse clamp mounting suitable for 8.5 mm ... 10.5 mm groove
	<b>OMH-SLCT-12-500</b>	Mounting bracket, muting arm with round rod d=12 mm
	<b>OMH-SLCT-01</b>	Quick clamp and adjustment system
	<b>OMH-SLCT-02</b>	Attachment aid for OMH-SLCT-01
	<b>OMH-SLCT-03</b>	Mounting bracket including adjustment
	<b>OMH-SLCT-04</b>	Mounting bracket including adjustment (with loose bearing)
	<b>OMH-SLCT-05</b>	Mounting bracket including adjustment
	<b>OMH-SLCT-06</b>	Swivel Bracket

Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 265788\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**