


# Pad-Ex 01 P12 DZ2

User's Manual

Intrinsically Safe  
Tablet PC

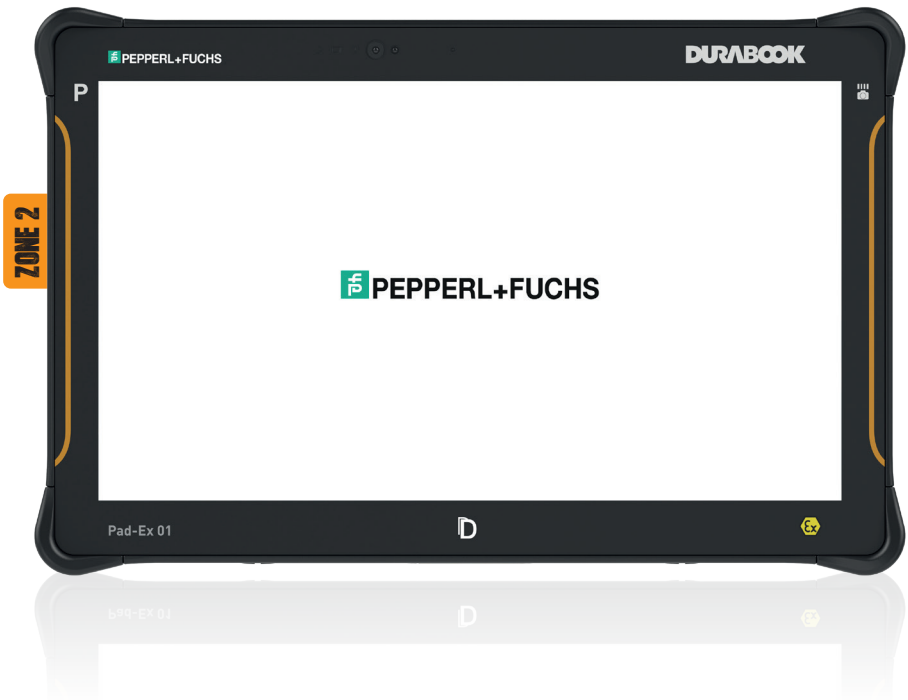

Your automation, our passion.

 **PEPPERL+FUCHS**

# Table of Contents

BEFORE YOU START .....	5
PACKAGE CONTENTS .....	5
PRODUCT OVERVIEW .....	6
<i>Front View</i> .....	6
<i>Back View</i> .....	7
<i>Right View</i> .....	8
<i>Left View</i> .....	8
<i>Bottom View 1</i> .....	9
STATUS INDICATORS .....	10

## **GETTING STARTED .....** 11

INSTALLING THE BATTERY .....	11
<i>Charging the Battery</i> .....	11
<i>When to replace the Battery Pack</i> .....	12
<i>Removing the Battery</i> .....	12
CONNECTING THE POWER .....	13
<i>Connecting the AC Adapter</i> .....	13
<i>Using Battery Power</i> .....	13
<i>Configuring the Power Settings</i> .....	14
STARTING YOUR TABLET PC .....	16
<i>Turning On Your Device</i> .....	16
<i>Turning Off Your Device</i> .....	16

## **OPERATING YOUR TABLET PC.....** 17

USING THE QUICK MENU.....	17
<i>Quick Menu Overview</i> .....	17
<i>Viewing the Version Information</i> .....	18
<i>Viewing the Battery Charge Cycles</i> .....	18
<i>Battery Charging Protection Setting</i> .....	18
<i>Configuring the Programmable Button (P)</i> .....	19
<i>Configuring the Programmable Button (D)</i> .....	20
<i>Configuring the Programmable Button (Barcode)</i> .....	21
<i>Configuring the Up/Down Button</i> .....	21
<i>Assigning an Application to the P/D/Barcode Button</i> .....	22
<i>Accessing the Mobility Center</i> .....	23
<i>Configuring External Antenna Switching Mode (For selected models)</i> .....	24
<i>Configuring Adaptive Brightness Setting</i> .....	24
USING THE CAMERA .....	25
<i>Opening the Camera App</i> .....	25
<i>Taking Photos</i> .....	27
<i>Recording Videos</i> .....	28
<i>Setting a Flash Mode</i> .....	28

Setting Photo Timer .....	28
Switching Between Modes .....	29
Adjusting Focus .....	29
Adjusting Brightness .....	30
Configuring Camera Settings .....	30
Viewing Photos/Videos .....	32

**MAKING CONNECTIONS ..... 33**

INSTALLING THE MICRO SD MEMORY CARD .....	33
INSTALLING THE SIM CARD .....	33
CONNECTING THE MICROPHONE /HEADSET .....	34
CONNECTING USB D EVICES.....	34
CONNECTING MICRO HDMI DEVICES .....	36
CONNECTING TO WIRELESS CONNECTIONS.....	37

**USING THE BIOS SETUP UTILITY..... 44**

BIOS SETUP MENU .....	44
MAIN MENU .....	45
ADVANCED MENU .....	46
BOOT MENU.....	47
CHIPSET MENU .....	48
SECURITY MENU .....	49
SAVE EXIT MENU.....	50

**MAINTAINING AND CARING FOR YOUR TABLET PC ..... 51**

PROTECTING YOUR TABLET PC .....	51
STORING AND HANDLING YOUR TABLET P C .....	51
CLEANING YOUR TABLET PC.....	55
TRAVELING WITH YOUR TABLET PC.....	56

**TROUBLESHOOTING ..... 57**

PRELIMINARY CHECKLIST .....	57
SOLVING COMMON ROBLEMS.....	57
DISPLAY PROBLEMS.....	59
HARD DISK PROBLEMS .....	60
OTHER PROBLEMS .....	62

**APPENDIX ..... 63**

COPYRIGHT .....	63
SPECIFICATIONS .....	63
REGULATORY STATEMENT .....	66
<i>Federal Communications Commission Statement.....</i>	66
<i>IC Regulations.....</i>	66

<i>Declaration of Conformity</i> .....	67
<i>RF exposure warning</i> .....	67
<i>Canada, Industry Canada (IC) Notices</i> .....	68
<i>European Union CE &amp; UKCA Marking and Compliance Notices</i> .....	70
<i>Battery Disposal</i> .....	70
<i>CLASS 1 LASER PRODUCT</i> .....	70
SAFETY INSTRUCTIONS.....	72
<i>Ex-Data</i> .....	73
SHOP FLOOR DATE CODE FORMAT D DESCRIPTION.....	75

# Before You Start

Congratulations on your purchase of this tablet PC.

This rugged tablet PC is portable and provides users with maximum mobile computing experience in a wide range of working environments. Before you begin using your tablet PC, read this chapter to familiarize yourself with the main components installed in the system.

## Package Contents

If any of following items is damaged, please contact your retailer.



Tablet PC



AC adapter



Power cord



Stylus and tether



Hand strap

### Software-Security

The Pad-Ex 01 P12 is based on the Durabook R11AH7 from Twinhead.

We do not make any changes to the operating system.

The latest Security information is available at [www.durabook.com](http://www.durabook.com) or [www.microsoft.com](http://www.microsoft.com).




### NOTE

- The pictures are for reference only, actual items may slightly differ.


# Product Overview

## Front View

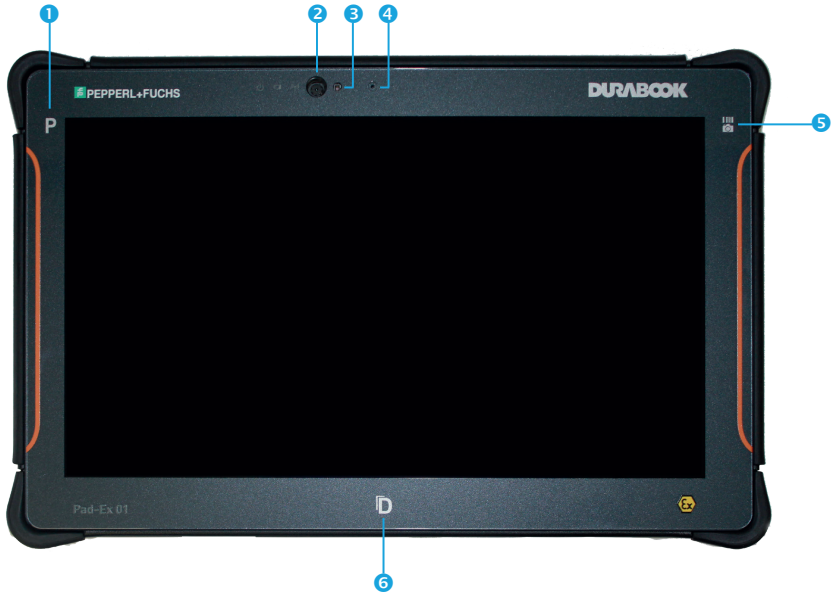

No.	Item	Description
1	Program button (P)	Tap to enable Stealth mode or enter the chosen program (user definition).
2	Front camera	Use for video conference.
3	Ambient light sensor	Use to detect the current level of visible light in the surrounding environment.
4	Microphone	Record the surrounding sound.
5	Barcode/Camera button	Tap to trigger Barcode Scanner, launch Camera application, or enter the chosen program (user definition).
6	Program button (D)	Tap to enable Touch Screen mode or enter the chosen program (user definition).

## Back View

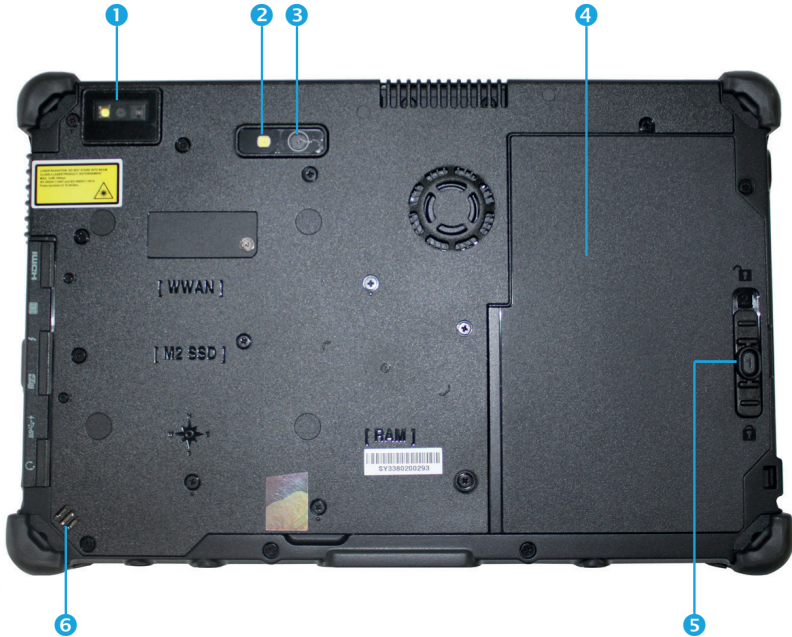

No.	Item	Description
1	Barcode scanner	Scan barcodes.
2	Camera light	Provide additional lighting when taking pictures under low light environment.
3	Rear camera	Use to take pictures.
4	Battery Pack	Battery Pack.
5	Battery latch release button	Press and hold the button to slide the battery latch to the unlock position.
6	Speaker	Emit sound.

## Right View



No.	Item	Description
1	Audio Combo jack	Connect a headphone or an external speaker or microphone.
2	USB 3.2 port	Connect USB-A peripheral devices.
3	MicroSD memory card slot	Use to insert a MicroSD card to transfer pictures, music, and data between your Tablet PC and flash compatible devices.
4	Thunderbolt 4 port	Connect Thunderbolt peripheral devices or USB-C peripheral devices.
5	SIM card slot	Use to insert a SIM card for WWAN module connection.
6	Micro HDMI port	Connect HDMI peripheral devices with micro HDMI support.

## Left View




No.	Item	Description
1	Power button	Press to turn your tablet PC on or off.
2	Up/Down buttons	The button functionality can be assigned via Quick Menu. <ul style="list-style-type: none"><li>• Brightness adjustment: Press to adjust the brightness level.</li><li>• Volume adjustment: Press to adjust the volume level.</li><li>• Disable</li></ul>
3	Kensington lock slot	A Kensington cable can be connected.





**NOTE**

- When using the tablet PC without attaching an external keyboard, the three-finger salute (Ctrl+Alt+Del) function is defined by pressing the **D-Key** if the **D-Key** has been assigned to function as the “SAS key” in the Quick Menu. Pressing the **D-Key** will switch to Windows Security screen, which lets you lock the device, switch to different user, sign out, change a password, enter Task Manager, connect to an available wireless network, activate the airplane mode, enter the Accessibility menu, shutdown/restart the device, or activate the Sleep mode.

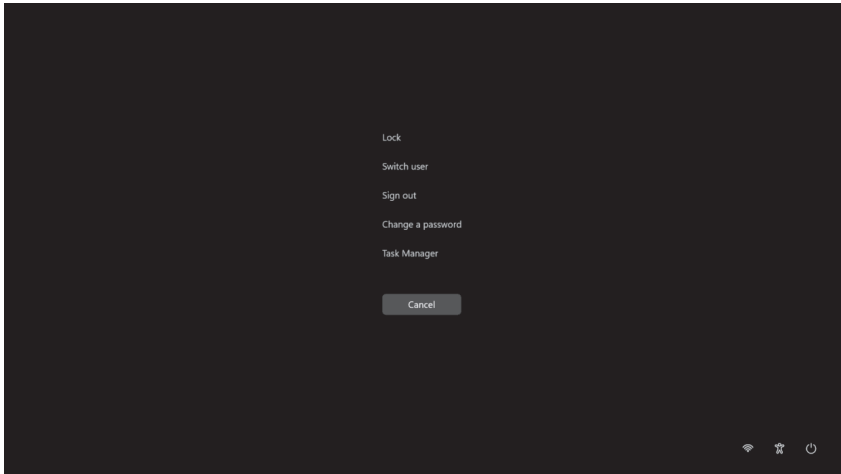

**Bottom View**






No.	Item	Description
1	RF pass through connector (for selected models)	Use for the external GPS/WWAN Antenna.
2	Docking connector	Connect the tablet PC to a docking station.
3	DC-IN jack	Connect the power adapter.

# Status Indicators

The status indicators in the upper side of the tablet PC light up when a particular function of the tablet PC is active.



Icon	Item	Description
	Power	Green LED always lights on when the system is running. When the system is off or in hibernation mode, the LED is off.
	Battery	Indicate the battery status: <ul style="list-style-type: none"><li>• Green: when battery is fully charged (95% or above)</li><li>• Orange: when battery is charging</li><li>• Flashing Orange: when there is a battery error (cannot fully charge the battery within 8h)</li><li>• Red: when battery capacity is lower than 7%</li><li>• Off: when discharged</li></ul>
	RF	Blue LED lights on when the airplane mode is off. Blue LED lights off when the airplane mode is on.



## NOTE

- When the Stealth mode is on then all LED lights will automatically turn off.

# Getting Started

This chapter will help you get started using the device.

## Installing the Battery

To install the battery, follow the steps below:

1. Align and insert the battery to the battery compartment.
2. Push completely until the battery locks into place.



3. Slide the battery latch to the lock position to secure the battery.



## Charging the Battery

The Lithium-ion battery is not fully-charged upon purchase.

To charge the battery, follow the steps below:

1. Install the battery to your tablet PC. See procedures above.
2. Connect the AC adapter to the DC-IN jack of your tablet PC.
3. Connect the AC adapter to the power cord.
4. Plug the power cord to an electrical outlet.

## When to replace the Battery Pack

The battery performance gradually decreases over time and usage.

We recommend you to replace your battery pack after 18 to 24 months of usage.

## Removing the Battery

To remove the battery, follow the steps below:

1. Press and hold the battery latch release button to slide the battery latch to the unlock position.



2. Remove the battery out of the battery compartment.



# Connecting the Power

Your tablet PC can be powered up using the AC adapter or the Lithium-ion battery.

## Connecting the AC Adapter

The AC adapter powers up your tablet PC and charges the battery.



1. Connect the AC adapter to the DC-IN jack of your tablet PC.
2. Connect the AC adapter to the power cord.
3. Plug the power cord to an electrical outlet.

## Using Battery Power

1. Install a charged battery in the battery compartment.
2. Remove the AC adapter (if plugged). Your tablet PC will automatically use the battery power.




### NOTE


- If your tablet PC is connected to an electrical outlet and the battery is installed, your tablet PC uses power from the electrical outlet.

## Configuring the Power Settings

1. Right-click the battery icon (🔋) on the system tray. Then select **Power and sleep settings**.




2. Customize **Power & battery** settings.

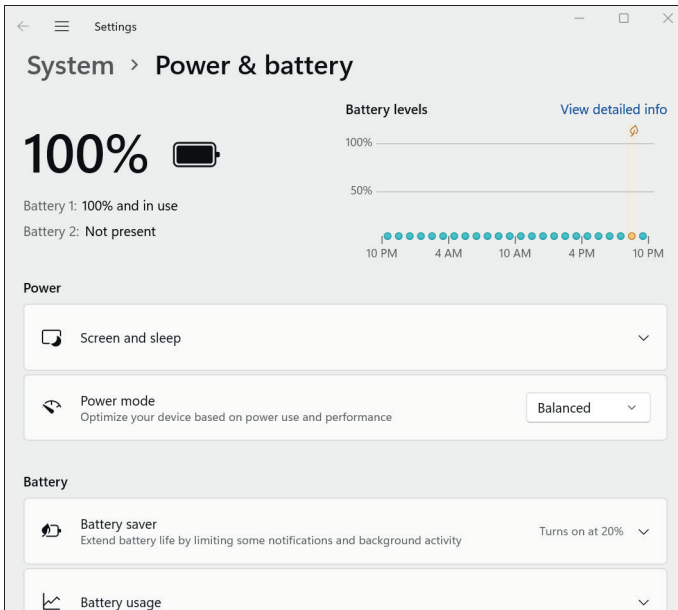

In the **Power** tab, tap any of the following:

- **Screen and sleep:** Select the time period when the device turns off the screen and enters the sleep mode.

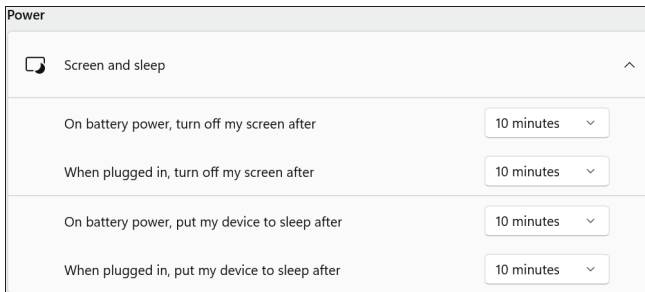


- **Power mode:** Optimize your device based on power use and performance by selecting your preferred power mode from the dropdown menu.

In the **Battery** tab, tap the following:

- **Battery saver:** Extend battery life by limiting some notifications and background activity.



# Starting Your Tablet PC

## Turning On Your Device


Press the  button until the Power LED lights up.

## Turning Off Your Device

It is important to properly shut down your tablet PC to avoid the loss of unsaved data. To shut down your tablet PC, do the following:

Tap  >  > **Shut down.**

Wait for your notebook to turn off power completely before removing the power source (if necessary).

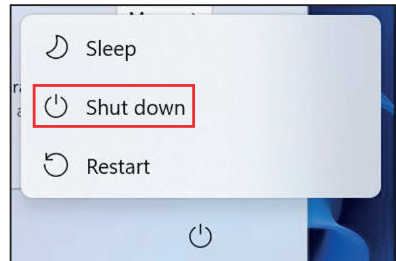




# Operating Your Tablet PC


This chapter will guide you on how to use your Tablet PC.

## Using the Quick Menu


To enter the Quick menu, tap the arrow on the task bar to display hidden icons. Then tap the Quick Menu icon (⚙️).



## Quick Menu Overview

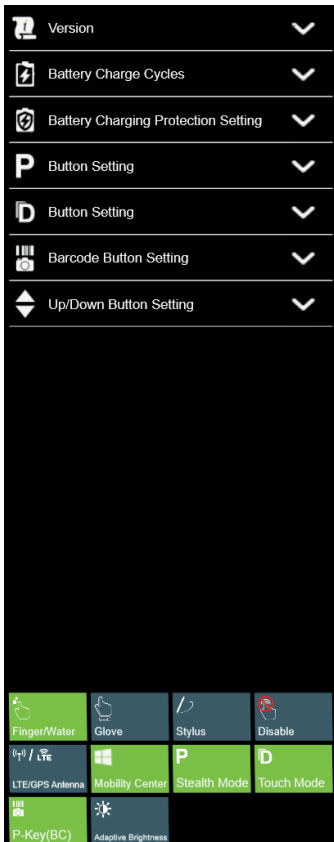


### NOTE

- If the tab is green (i.e. ) this indicates the current function is activated.


## Viewing the Version Information

On the **Version** section, you can view the Bios version, EC version, and Quick Menu version.

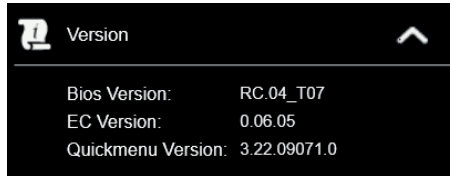

## Viewing the Battery Charge Cycles

On the **Battery Charge Cycles** section, you can view the battery charge cycle and battery status.

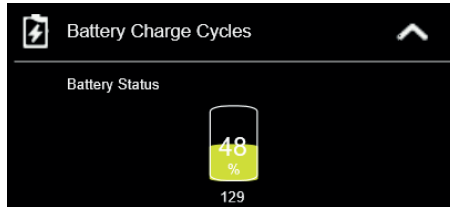

## Battery Charging Protection Setting


On the **Battery Charging Protection Setting** section, select the protection setting.

### NOTE

- Tap  to view a detailed description of each battery charging protection mode.


There are four available options:

- **Regular Mode:** In this mode the battery will be fully charged.
- **Optimized Battery Charging (OBC):** Battery charging will stop at 80% to reduce battery aging.
- **Temperature Control Mode (TCM):** To extend the lifetime of the battery, charging is enhanced based on DURABOOK intelligent algorithm and battery temperature.
- **DURA<sup>2</sup> Charging (D2C):** To maximize battery performance and lifespan, charging is enhanced based on DURABOOK intelligent algorithm and battery temperature. Battery charging will stop at 80%.

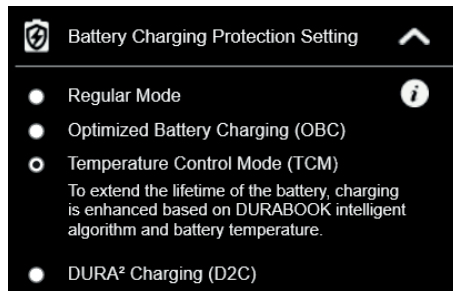

## Configuring the Programmable Button (P)

On the **P Button Setting** section, you can assign the function for the **P** button.

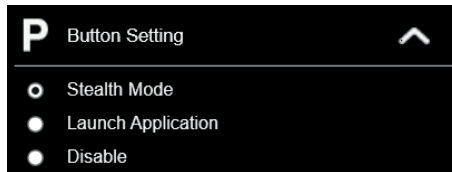


There are four available options:

- **Stealth Mode:** Turn off the LCD backlight, LEDs, speakers, camera flash, and RF devices (default mode).
- **Night Vision:** Provides 1.7 nits of display brightness for mission critical situations. (For selected models).
- **Launch Application:** Shortcut key for launching a specific application. To assign the application, refer to the "Assigning an Application to the P/D/Barcode Button" section.
- **Disable:** No function.

## Configuring the Programmable Button (D)

On the **D Button Setting** section, you can assign the function for the **D** button.

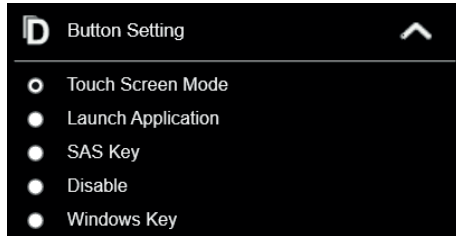


There are five available options:

- **Touch Screen Mode:** Toggles the touch screen mode. The available modes are as follows:
  - **Finger/Water mode** (default)
  - **Glove mode**
  - **Stylus mode**
  - **Disable**
- **Launch Application:** Shortcut key for launching a specific application. To assign the application, refer to the "Assigning an Application to the P/D/Barcode Button" section.
- **SAS Key:** Shortcut key for launching the Windows Security screen.
- **Disable:** No function.
- **Windows Key:** Opens the Start menu.

## Configuring the Programmable Button (Barcode)

On the **Barcode/Camera Button Setting** section, you can assign the function for the **Barcode/Camera** button.

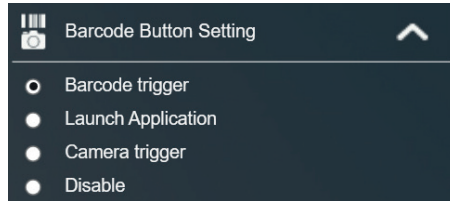


There are four available options:

- **Barcode trigger:** Scan the barcode (if the barcode scanner is integrated).
- **Launch Application:** Shortcut key for launching a specific application. To assign the application, refer to the "Assigning an Application to the P/D/Barcode Button" section.
- **Camera trigger:** Shortcut key for launching the Windows Camera application.
- **Disable:** No function.

## Configuring the Up/Down Button

On the **Up/Down Button Setting** section, you can assign the function for the **Up/Down** button.

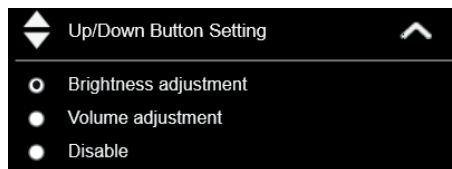


There are three available options:

- **Brightness adjustment:** To adjust screen brightness level;
- **Volume adjustment:** To adjust volume level;
- **Disable:** No function.




# Assigning an Application to the P/D/Barcode Button

Tap the **P-Key**, **D-Key**, or **P-Key(BC)** tab respectively to assign an application to the **P**, **D**, or **Barcode** button. Select the desired application and click **Open**.

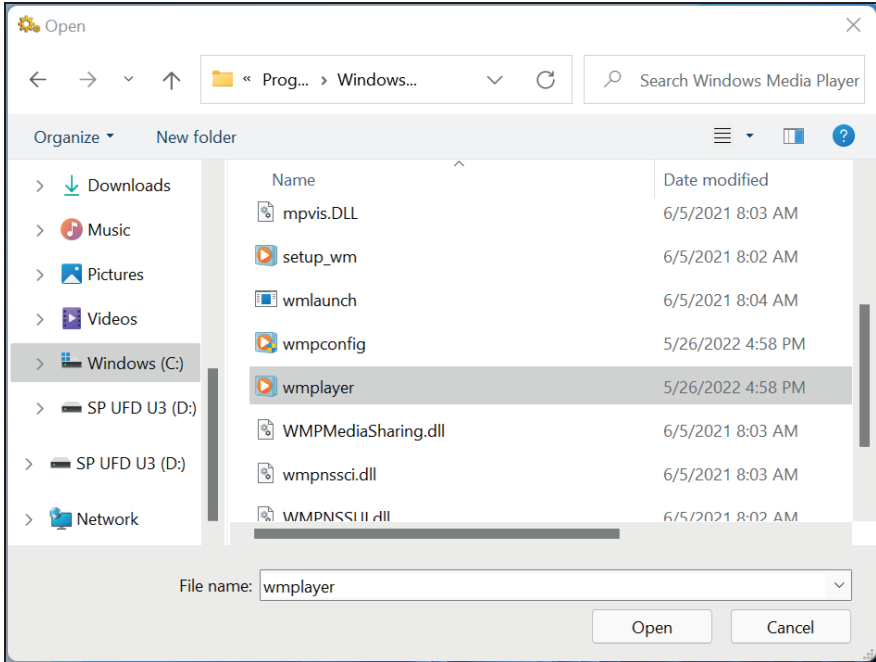

## Accessing the Mobility Center

Tap the **Mobility Center** tab to adjust or configure the brightness, volume level, battery status, screen orientation, external display, sync, and presentation settings.

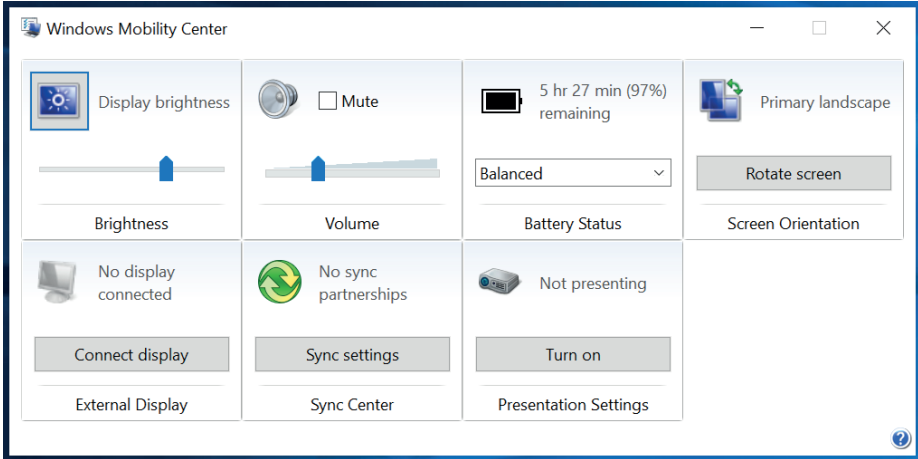


## Configuring External Antenna Switching Mode (For selected models)



### NOTE

- The LTE/GPS Antenna tab is visible in the Quick Menu only for these devices that support the RF pass through function.

Select the respective external antenna tab to configure the setting.

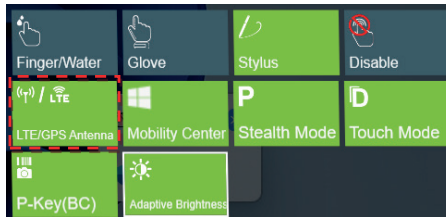

- Tap the **LTE Antenna** tab to enable/disable the device to automatically switch to the external WWAN antenna when it is affixed on a docking station.
- Tap the **GPS Antenna** tab to enable/disable the device to automatically switch to the external GPS antenna when it is affixed on a docking station.




### NOTE

- If the tab is green, this indicates the current function is activated.

## Configuring Adaptive Brightness Setting

Tap the **Adaptive Brightness** tab to enable/disable the device to automatically adjust the brightness level according to the ambient light.

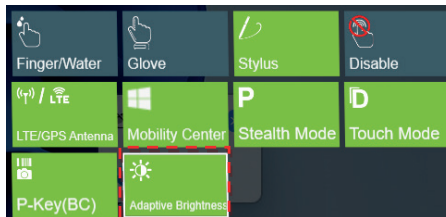




# Using the Camera


Using the Camera application, you can use this tablet PC to take photos or videos.


## Opening the Camera App

To access the Camera application, do one of the following:

- a. Tap  > **All apps** > **Camera**.

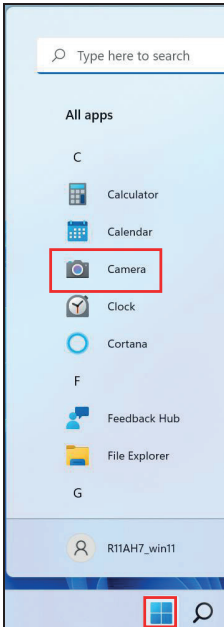

b. Tap  and enter 'camera' into the search bar. Then tap **Camera**.

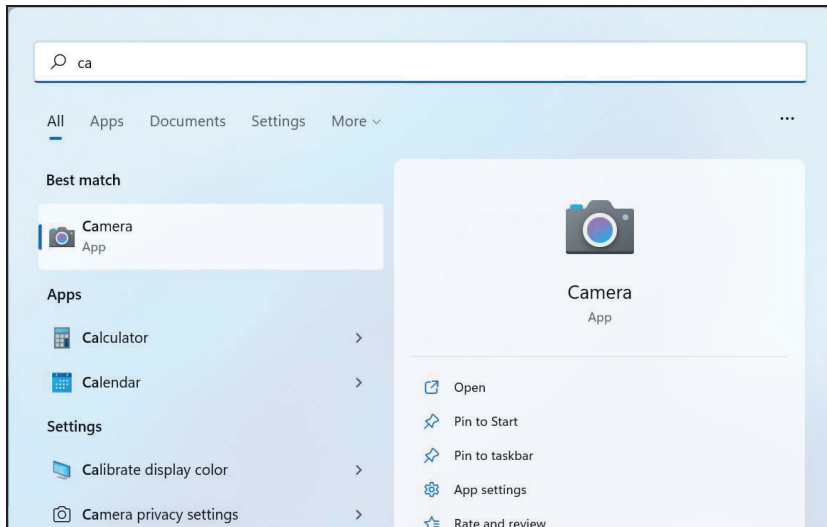

## Taking Photos

Tap  to capture a photo.






### NOTE

- To switch between front and rear cameras, tap .

## Recording Videos

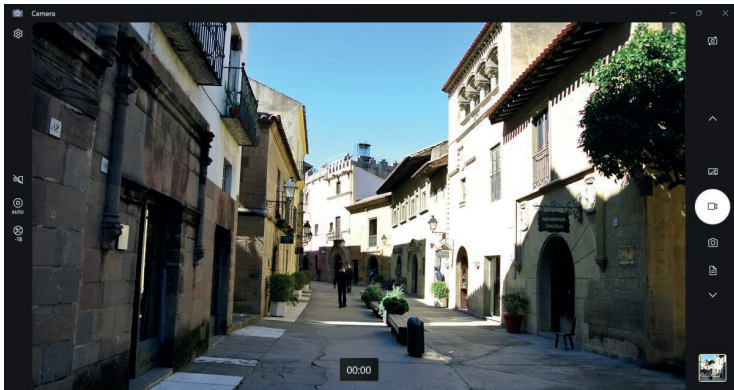


1. Tap  to switch to Video mode.




2. Press  to start recording a video. The recording time appears on the bottom on the screen.
3. To stop recording the video, tap .


## Setting a Flash Mode





In photo capturing mode, tap  to select the desired flash mode.

- : Flash is off
- : Flash is on
- : Automatic flash

In video recording mode, tap  to toggle the camera LED flash on or off.







## Setting Photo Timer

Tap  to toggle the desired time delay.



- : Self-timer is off
- : 2-second self-timer
- : 5-second self-timer
- : 10-second self-timer

## Switching Between Modes

Tap on your preferred shooting mode. If the mode is not visible, tap  $\wedge/\vee$  or slide the mode bar up/down to see more shooting modes:



- : Take a panorama picture.
- : Record a video.
- : Take a photo.
- : Automatically adjusted mode for capturing a document.
- : Automatically adjusted mode for capturing a whiteboard.
- : Scan a barcode.

## Adjusting Focus

1. Tap  to display the focus control slider.
2. Do the following:
  - Tap and drag  upwards (or downwards if necessary) to focus automatically (**auto**), manually (**M**), or use infinity focus ( $\infty$ ).



## Adjusting Brightness


1. Tap  to display the brightness control slider.
2. Do the following:
  - Tap and drag  upwards to brighten your photo or video.



- Tap and drag  downwards to darken your photo or video.

## Configuring Camera Settings

1. Tap  to enter the Settings menu.

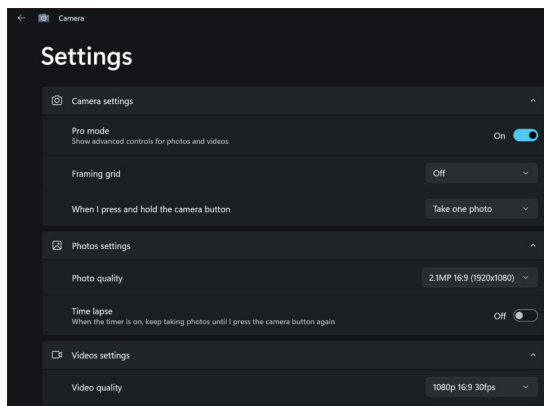


2. Select the desired menu option and setting.

Menu Option	Description
<i>Camera settings</i>	
Pro mode	Enable or disable to show advanced controls for photos and videos.
Framing grid	Show or hide the framing grid lines.
When I press and hold the camera button	Select the action when a camera button is pressed.
<i>Photo settings</i>	
Photo quality	Select the aspect ratio of the photos.
Time lapse	Enable or disable taking photos continuously until the camera button is pressed again.
<i>Videos settings</i>	
Video quality	Set the video resolution.
Flicker reduction	Select the flicker reduction setting: <ul style="list-style-type: none"> <li>• 50 Hz/60 Hz: To reduce the flickering that may occur when recording video under fluorescent light.</li> <li>• Auto: To set flicker reduction automatically.</li> </ul>
<i>Related settings</i>	
Select the related settings that can be configured in the <b>Settings</b> app or try out experimental features.	

## Viewing Photos/Videos

After taking a photo or recording a video, tap the thumbnail (in the bottom-right corner) to view the most recent photo or video taken.

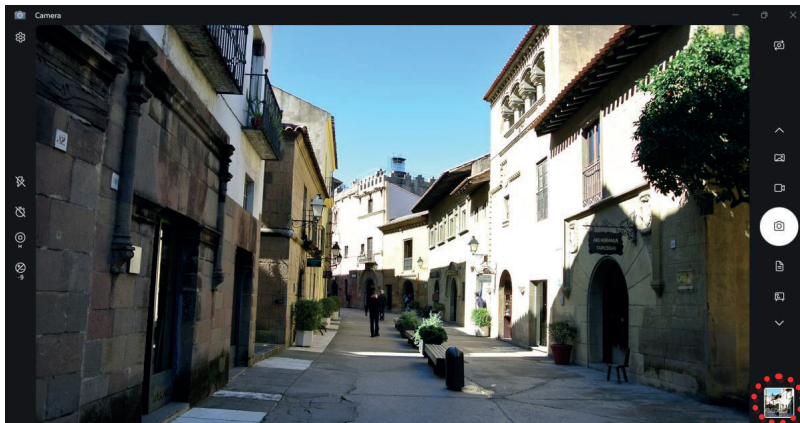

Swipe right to see and manage other photos or videos in your collection.



# Making Connections

This chapter will guide you on installing peripheral devices to maximize the use of your tablet PC.

## Installing the MicroSD Memory Card

To insert a MicroSD memory card:

1. Push down and pull to open the I/O port cover.
2. Push the memory card into the memory card slot until it clicks into place.



## Installing the SIM Card

You can use a SIM card for wireless internet access.




### NOTE

- Check the availability of service and plan rates of data connection with your network service provider.

To insert a SIM card:

1. Push down and pull to open the I/O port cover.
2. Push a valid SIM card into the SIM card slot until it clicks into place.

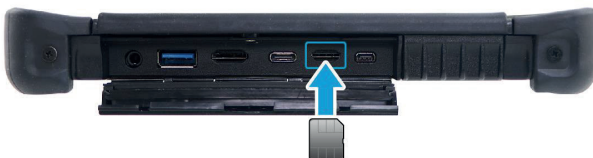

# Connecting the Microphone/Headset

Your tablet PC is equipped with audio combo jack that enables you to use the headset or microphone.

- ❖ To connect to a headset, open the I/O port cover and plug the stereo headphone cable into the audio combo jack.



- ❖ To connect to a microphone, open the I/O port cover and plug the microphone cable into the audio combo jack.



**NOTE**

- The headset and microphone are not included in the package. They are sold separately.


# Connecting USB Devices

You can connect your tablet PC to other USB devices, such as a mouse, keyboard, digital camera, printer, or an external hard disk drive.

Those devices that support USB 3.2, connect to the following port:



Those devices that support USB-C, connect to the following port:

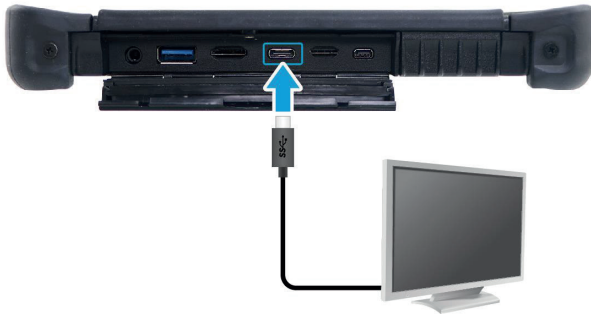

1. Push down and pull to open the I/O port cover.
2. Connect one end of the USB cable to the USB port of your device.
3. Connect the other end of the cable to the USB device (if necessary).




## NOTE

- The USB cable is not included in the package. It is sold separately, or it may come with your USB device.

## Connecting Micro HDMI Devices

You can connect your tablet PC to other micro HDMI devices, such as an external display.

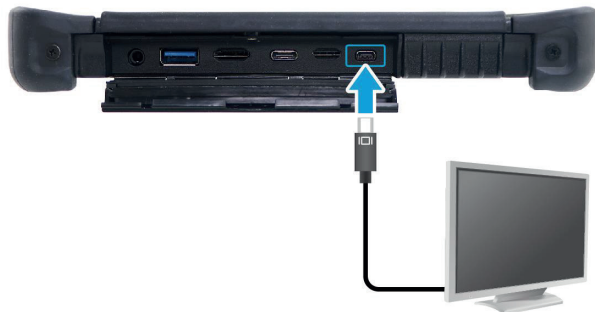

1. Push down and pull to open the I/O port cover.
2. Connect one end of the micro HDMI cable to the micro HDMI port of your device.
3. Connect the other end of the cable to the micro HDMI device (if necessary).

 **NOTE**

- The micro HDMI cable is not included in the package. It is sold separately, or it may come with your HDMI device.

# Connecting to Wireless Connections

Your tablet PC can connect and communicate with other wireless devices.

 **NOTE**


- Do not disassemble the bumper. Otherwise, the antenna may be damaged, resulting in poor reception.

## Connecting to a Bluetooth Device

Your tablet PC can connect and communicate with other Bluetooth-enabled devices. By default, the Bluetooth function is disabled.


To add a device, follow the steps below:

1. Tap the arrow icon (↗) on the system tray to display hidden icons.
2. Tap the Bluetooth icon (📶) and select **Add a Bluetooth Device**.

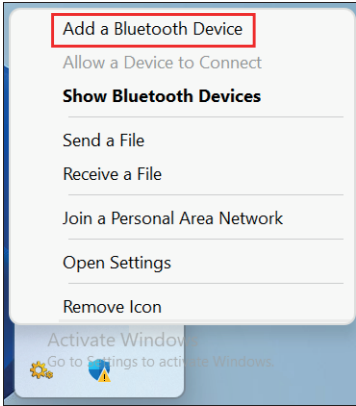


## Making Connections

3. Tap **Add device** and select the kind of device you want to add.

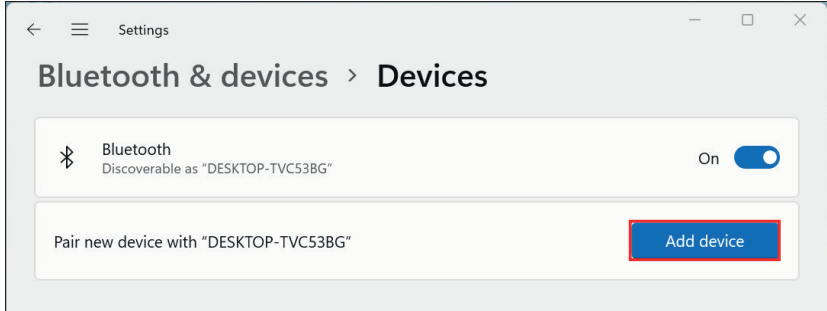


4. Select the device you want to connect. Verify the pairing code on the screen of your device and pairing device match, then tap **Connect** to start pairing.

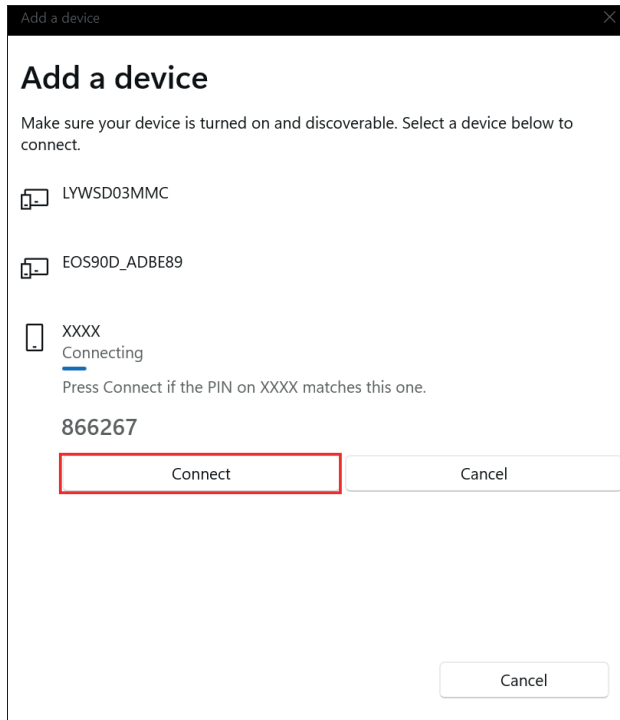

### NOTE


- If the device that you want to add does not appear on the screen, please check if the device is turned on and is discoverable.

5. Tap **Done** to complete the pairing connection.

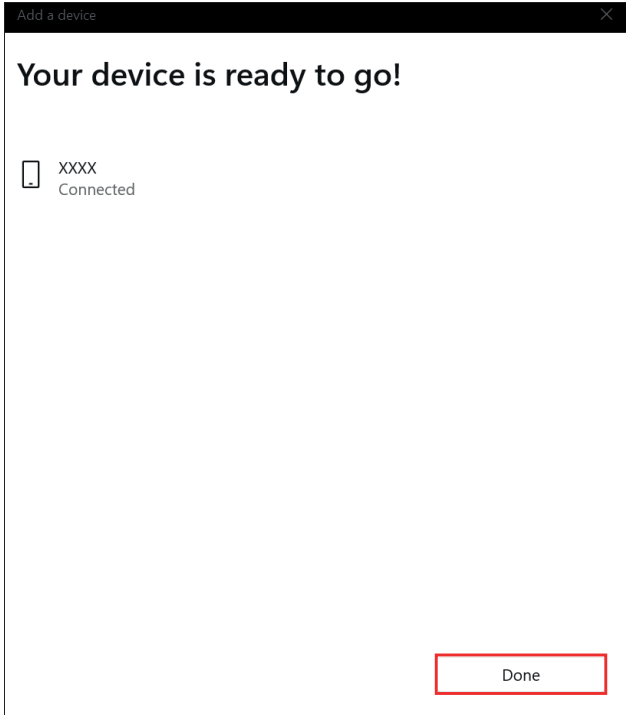

**NOTE**

- Most Bluetooth-enabled devices need to be paired with your tablet PC. The PIN you enter on the tablet PC must be the same PIN to be entered on the other Bluetooth device.
- Once a partnership has been created, connecting to that device again will no longer require entering the PIN.
- To disconnect from the Bluetooth-enabled device, select the device in the Devices menu and tap **Remove device**.

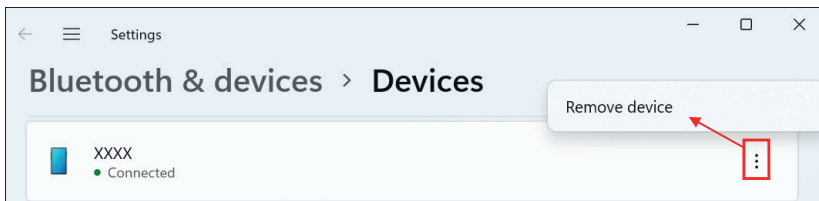


## Connecting to a Wireless Local Area Network


Your tablet PC comes with a WLAN module. A wireless network can be added either when the network is detected or by manually entering the settings information.

To connect, follow the steps below:

1. Tap the wireless network icon (📶) on the system tray.
2. Tap 📶 on the Wi-Fi tab to enable Wi-Fi. Then tap > to view available wireless networks.

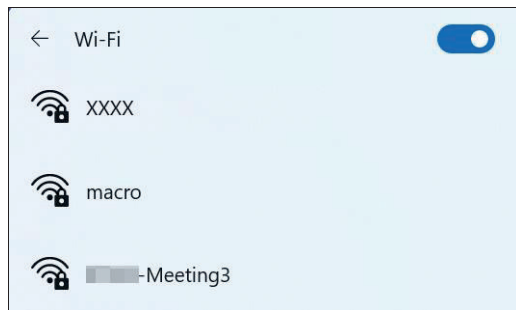

3. Tap the desired wireless network and then tap **Connect**.

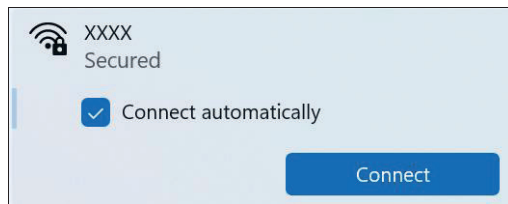



4. Tap **Connect**.


Some networks require a network security key or a password.



**TIP**

Check **Connect automatically** box to automatically connect to this network when it is available.

5. Enter the network security key.

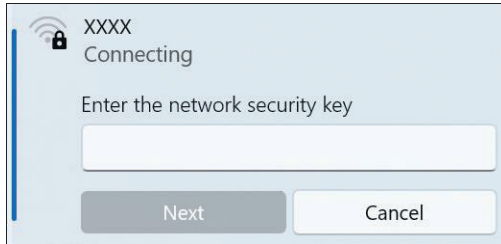

7. Tap **Next**. After the connection is established, you can see the wireless icon (📶) in the Notification area.



**NOTE**


- Wi-Fi access requires service from a wireless service provider. Contact your service provider for more information.
- Actual wireless connectivity will depend on system configuration. Please contact your dealer for more information.
- To disconnect from the wireless network, select the network in the Wi-Fi list and tap **Disconnect**.

### Connecting to a Wireless Wide Area Network (WWAN)


With **WWAN** function, it allows your tablet PC to connect to the Internet using mobile or cellular data networks.

To connect, follow the steps below:

1. Insert a valid SIM card into the SIM card slot.
2. Tap the cellular network icon (📶) on the system tray. Then tap **Cellular** to enable the Internet connection via mobile data network.

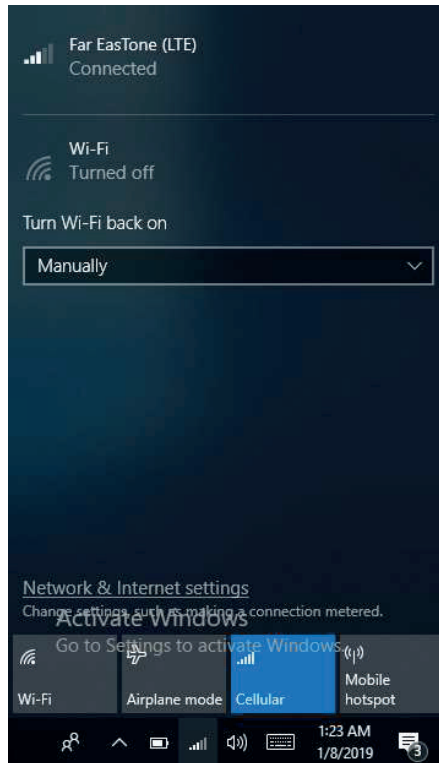

3. Select the mobile network carrier and tap **Connect** to establish the connection.

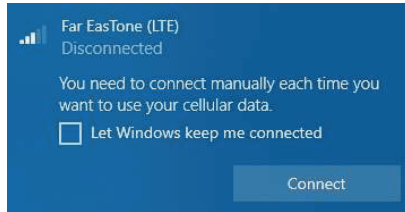

**TIP**

Check **Let Windows keep me connected**

box to allow the system to automatically connect to this mobile data network.

# Using the BIOS Setup Utility

Your tablet PC has a BIOS setup utility which allows you to configure important system settings, including settings for various optional functions of the tablet PC. This chapter explains how to use the BIOS setup utility.

## BIOS Setup Menu

The BIOS Setup Utility allows you to configure your Tablet PC basic settings. When you turn your tablet PC on, the system reads this information to initialize the hardware so that it can operate correctly. Use the BIOS setup utility to change your tablet start-up configuration. For example, you can change the security and power management routines of your system.

### Starting the BIOS Setup Utility

You can enter the BIOS setup utility and press [Setup] button while the tablet PC is booting, that is between the time you turn on the tablet PC and before the Windows interface appears.



#### NOTE

- You can also connect your device with an external keyboard first before starting the BIOS Setup Utility. Shut down your tablet PC completely (power off) and restart it and then press the **Delete** button to enter the setup utility.



# Main Menu

The Main menu displays the system overview information about the device, including the system date and time.



Item	Description
BIOS Information	Display the BIOS and EC version, build date and time detected during boot up.
System Information	Display the CPU name, total memory, mainboard version, processor type, ME FW version and SKU, serial number, and BIOS UUID.
System Date	Set the system date.
System Time	Set the system time.

# Advanced Menu


The Advanced menu allows you to configure specific system settings.



Item	Description
CPU Configurations	Configure the CPU parameters.
Programmable Buttons	Set the function of the D button, P button, Barcode/Camera button, and Volume Up/Down button.
Device Configurations	Enable or disable the USB Type A port, SD card reader, TPM device, HD audio, touch screen, front and rear camera, barcode, WLAN, and Bluetooth.
Antenna Switching Configurations	<ol style="list-style-type: none"> <li>(1) Enable/disable the device to automatically switch to the external GPS antenna when it is affixed on a docking station.</li> <li>(2) Enable/disable the device to automatically switch to the external WWAN antenna when it is affixed on a docking station.</li> </ol>
Power Configurations	Configure the power management settings including resume on AC power, USB 3.0 power share, and battery-protection function.
TPM Configurations	Configure Trusted Computing settings.
Battery Calibrations	Calibrate the battery pack.
Touch Screen Mode Selection	Select the touch screen mode.

# Boot Menu


The Boot menu allows you to configure the boot settings and boot sequence.

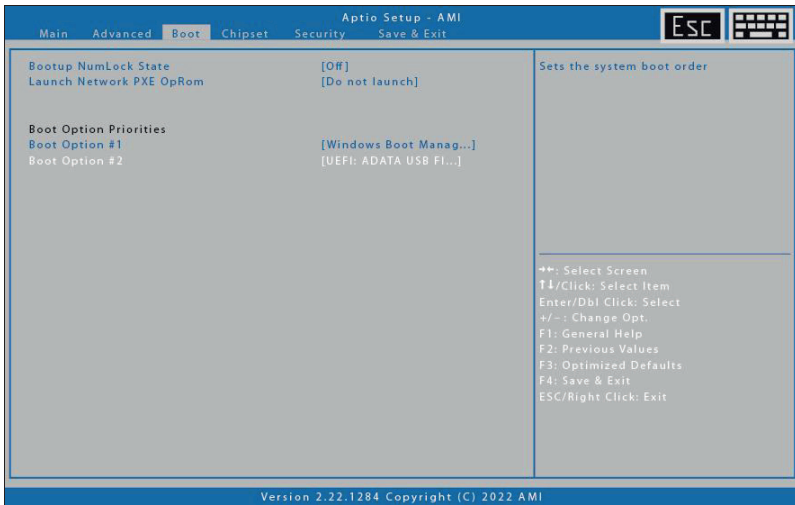

Item	Description
Bootup NumLock State	Select the keyboard NumLock state.
Launch Network PXE OpRom	Control the execution of UEFI and Legacy PXE Option Rom.
Boot Option Priorities	Set the system boot order.

# Chipset Menu

The Chipset menu allows you to configure the System Agent and PCH-IO settings.

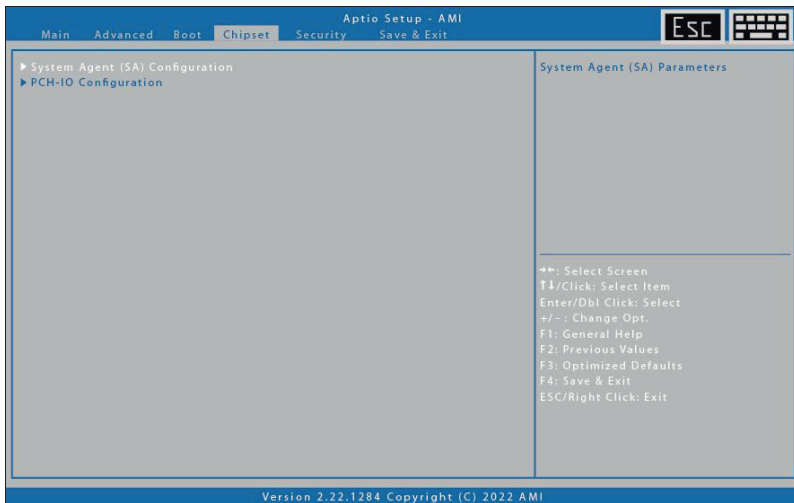


Item	Description
System Agent (SA) Configuration	Configure the SA parameters.
PCH-IO Configuration	Configure the PCH-IO parameters, such as PCI Express, SATA, sensor hub, DeepSx power policies, and more.



# Security Menu


The Security menu allows you to set or change the Administrator password and configure the secure boot mode settings.

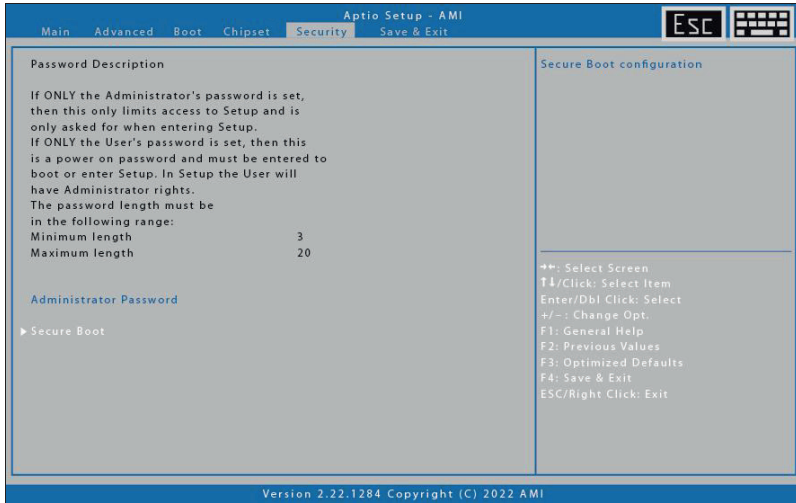

Item	Description
Administrator Password	Create or change the Administrator password.
Secure Boot	Customize the Secure Boot settings.

# Save & Exit Menu

The Save & Exit menu allows you to save/discard the changes and restore the default values for all setup options before leaving the BIOS Setup Menu.

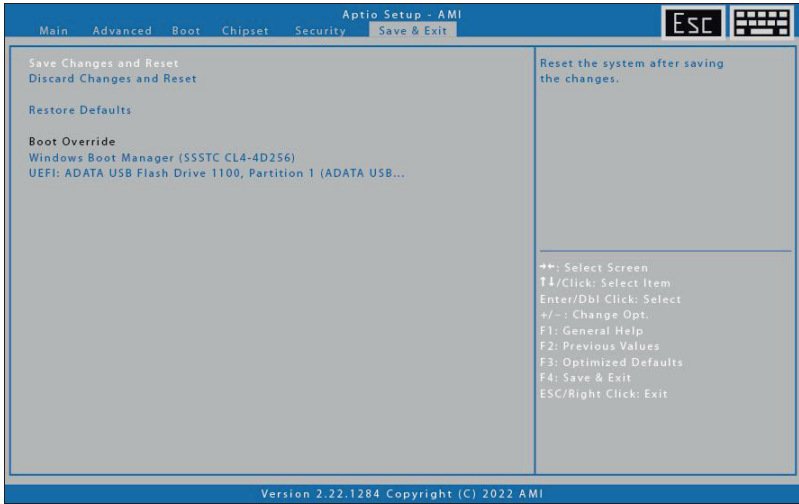

Item	Description
Save Changes and Reset	Reset the system after saving the changes.
Discard Changes and Reset	Reset the system setup without saving any changes.
Restore Defaults	Restore the default values for all the setup options.
Boot Override	Shortcut to the Windows Boot Manager.

# Maintaining and Caring for Your Tablet PC

Taking care of your tablet PC will reduce the risk of damage to your device and ensure that it operates properly.

To help you maintain the quality and function of your tablet PC, this chapter provides guidelines on how to protect, store, clean, and travel with your device.

## Protecting Your Tablet PC

To safeguard the integrity of the data stored on your tablet PC as well as the device, please follow the precautions described below:

- Install an anti-virus program to monitor potential viruses that could damage your files.
- Use a Kensington cable lock to protect your tablet PC against theft. Cable locks are available for purchase from online retailers and in most stores that sell computers.
- To use the lock, loop the lock cable around a stationary object such as a table. Then, insert the lock into the Kensington lock hole and turn the key to secure the lock. Store the key in a safe place.

## Storing and Handling Your Tablet PC

### General Storage and Handling Guidelines

- Use your tablet PC at the recommended temperature—between 0°C (32°F) and 55 °C (131 °F)—to ensure optimal performance (Actual operating temperature depends on product specifications.)
- Avoid placing your Tablet PC in a location subject to high humidity, extreme temperatures, mechanical vibrations, direct sunlight, or heavy dust. Using your device in extreme environments for long periods of time can result in product deterioration and a shortened product life.
- Do not place heavy objects on top of the tablet PC as this may damage the display.
- Do not operate in an environment with metallic dust.
- Store and use your tablet PC on a flat and steady surface. Do not stand the tablet PC on its side or store it in an upside-down position. The impact from

dropping or an object hitting the device may cause damage.

- Do not cover or block any ventilation openings on the Tablet PC. For example, do not place the Tablet PC on a bed, sofa, rug, or other similar surface. Overheating may occur, which could result in damage to your tablet PC.
- Keep your tablet PC away from that are vulnerable to damage from heat, as the device can become very hot during operation,.
- Keep your tablet PC at least 13 cm (5 inches) away from electrical appliances that can generate a strong magnetic field such as a TV, refrigerator, motor, or a large audio speaker.
- Avoid moving your tablet PC abruptly from a cold to a warm place. A temperature difference of more than 10°C (18°F) may cause condensation inside the unit, which may damage storage media.

## Display and Touchscreen Guidelines

- Use your finger or the included stylus on the touchscreen surface. Using a sharp or metallic object, such as a pen or pencil, may scratch and damage the display, thereby causing errors.
- Use a soft cloth to remove dirt on the display. The touchscreen surface has a special protective coating that prevents dirt from sticking to it. Not using a soft cloth may cause damage to the special protective coating on the touchscreen surface.
- Turn off the Tablet PC power when cleaning the display. Cleaning the display with the power on may cause improper operation.
- Do not use excessive force on the display. Avoid placing objects on top of the display as this may cause the glass to break, thereby damaging the device.
- Expect a slower response time when using the touchscreen at lower temperatures (less than 5°C or 41°F). A normal response time may be restored upon returning to room temperature.
- Refer to Windows online support for instructions on recalibrating the touchscreen display when there is noticeable problem with the touchscreen function (e.g., improper display resolution or unresponsive touchscreen).
- LCD image sticking occurs when a fixed pattern is displayed on the screen for a prolonged period of time. You can avoid the problem by limiting the amount of static content on the display. It is recommended that you either use a screen saver or turn off the display when it is not in use.
- To maximize the life of the backlight display, allow the backlight to automatically turn off as a result of power management.

## Battery Pack Guidelines

- Do not expose the battery to temperatures below 0°C (32°F) or above 45°C (113°F). This may adversely affect the battery pack.
- While the battery may not provide 100% capacity at temperature extremes, its capacity is restored when the battery temperature return to a normal range, around 20°C (68°F).
- Your battery will last longer during the day if it is used, charged and stored between 50°F and 86°F (10°C and 30°C).
- Charge the battery nightly where the temperature will remain around 68°F (20°C). Your battery may not last as long through the day if you charge it at higher or lower temperatures.
- Allow unrestricted airflow while the device is connected to external power. Make sure that the fan inlet and outlet are unobstructed.
- Avoid exposure to extreme temperatures for long periods as this can shorten battery charge life or damage the battery.
- If your battery is charged in a cold (less than 5°C/41°F) or very warm (greater than 45°C/113°F) environment, it is possible that the Battery LED will indicate that the charge has stopped; However, this does not necessarily mean that your battery is fully charged.
- Read and follow all battery precautions in the Safety section.
- Use only batteries of the same kind as replacements.
- Turn the power off before removing or replacing batteries.
- To avoid malfunction of the tablet PC and losing any unsaved data, do not install or remove the battery pack while the device is in sleep mode.
- Avoid touching the contacts of the battery while installing or removing the battery. Hold the battery by the sides instead to prevent the malfunction of the system.
- Do not tamper with the batteries.
- Keep batteries away from children.
- Before storing your battery, read and follow the recommendations in the Battery Tips section.
- Dispose of used batteries according to local regulations.
- Recycle if at all possible.

## Battery Charging Recommendations

The battery is a consumable item that will eventually wear out and need replacement.



### NOTE

- If the battery pack has deteriorated, ensure it is replaced with a new one.

The lifespan of the battery depends upon its usage. To prolong battery life, follow the recommendations below:

- Keep the number of charges and discharges to a minimum. It is best to charge the tablet PC no more than once a day and only when the charge drops to 10% or lower. If you need to charge the battery continuously, consider using the battery charging protection mode, for example, OBC or D2C. For more information, refer to "Battery Charging Protection Setting". The charging time will vary depending on the charging protection mode.
- Monitor the temperature inside the battery to prevent it from becoming too high. Charge your tablet PC indoors in an open area where the temperature is between 50°F and 86°F (10°C and 30°C).  
To further enhance battery charging and prolong battery life, we advise charging the battery nightly, where the temperature will remain around 68°F (20°C).
- Charging the battery while the system is fully running will take longer. We recommend charging the battery when the system is in hibernation or sleep mode to increase the charging speed.

## Modern Standby Mode

To achieve longer battery life, your tablet PC supports modern standby mode. This is an advanced sleep mode that enables networking and communication devices to automatically switch between active and low-power modes based on the software activity of the system while the monitor is off. For example, you can still receive emails in this mode even though the device is in sleep mode. To resume active mode, press the **Power** button on your tablet PC.



### NOTE

- To avoid the loss of any unsaved data while the tablet PC is in modern standby mode, do not remove the battery and AC adapter simultaneously from the device. In addition, ensure there is enough battery charge if running on the battery power.

# Cleaning Your Tablet PC

## Cleaning the Outside Case

- Disconnect external power and turn off the device.
- Remove the battery.
- Add a small amount of water to a soft cloth and clean the device case. Do not use paper products because they can scratch the surface.
- Wipe off any excess liquid with a soft cloth.
- Reinstall the battery.

**CAUTION:** Aerosols, solvents, or strong detergents are not recommended cleaning solutions and may void your warranty. For system decontamination recommendations please contact your support representative.

## Cleaning the Display

Use a soft, dry cloth. In some cases, you can use a small amount of water to remove streaks or smears. For difficult display cleaning tasks, use a 50/50 mixture of isopropyl alcohol and water. Do not use paper products because they can scratch the screen.

## Cleaning the External Power Connector

The external power connector may sometimes be exposed to moisture and/or contamination causing an unreliable connection to the external power source. Clean the connector with a cotton swab dipped in electronics grade isopropyl alcohol.

# **Traveling With Your Tablet PC**

Before traveling with your tablet PC, make sure you prepare and follow the precautions described below:

- Back up the data on your hard drive to a flash drive or other storage device. As an added precaution, bring an extra copy of your important data.
- Make sure that the battery pack is fully charged.
- Ensure that your tablet PC is turned off.
- Confirm that all the connector covers are closed completely to ensure the device's waterproof integrity.
- Disconnect the AC adapter from your tablet PC and take it with you. Use the AC adapter to power the device and charge the battery.
- Hand-carry your tablets PC onto an airplane, train, or bus. Do not check it in as luggage.
- If you need to leave your tablet PC in a car, store it in the trunk to avoid exposing it to excessive heat.
- When going through airport security, do not carry your tablet PC through the magnetic detector (the device you walk through) or expose it to a magnetic wand (the handheld device used by security personnel). It is recommended that you send the tablet PC and any flash drives through the X-ray machine (the device where you set your bags).
- If you plan to travel abroad with your tablet PC, consult your dealer for the appropriate AC power cord for use in your country of destination.



# Troubleshooting

This chapter advises you on what actions to take when solving common computer problems that may be caused by issues with hardware or software.

## Preliminary Checklist

Here are the initial steps you should follow before taking further actions when encountering any problem:

1. Try to identify and isolate which part of the tablet PC is causing the problem.
2. Make sure that you turn on all peripheral devices before turning on the tablet PC.
3. If you are having trouble with an external device, make sure that the cable connections are correct and secure.
4. Make sure that the configuration information is properly set in the BIOS Setup program.
5. Ensure that all the device drivers are correctly installed.
6. Make note of your observations. Are there any messages on the screen? Do any indicators light up? Do you hear any beeps? Detailed descriptions are useful to the service personnel when you need to consult someone for assistance.
7. If any problem persists after you follow the instructions in this chapter, contact an authorized dealer for help.

## Solving Common Problems

### Battery Problems

#### **The battery does not charge**

- To prevent possible damage to the battery, the device does not allow the battery to charge if the internal temperature of the battery gets too low (< 5°C or < 41°F) or too high (> 50°C or > 122°F). If possible, charge the battery in a location with a moderate temperature of around 20°C (68°F).
- If possible, turn off the device while the battery is charging.
- If the battery is new or has been stored for a week or more, follow this procedure:
  1. Make sure the device is turned off.
  2. Remove the battery.
  3. Connect the AC adapter to the device and an AC wall outlet, and then turn on the device by pressing the POWER button.
  4. Let the device complete the boot process. Then reinstall the battery.
- Allow the system to remain idle for one hour with the AC adapter connected

- Allow the system to remain idle for one hour with the AC adapter connected to the device.
- The Battery Power LED lights when the battery starts charging.
- If the battery still fails to start charging after an hour, remove the battery, wait several seconds, and then install it again.
- If the battery does not begin charging within several minutes, return the unit for service.

### **The batteries take much longer than seven hours to charge.**

- Under moderate temperatures, about 20°C (68°F), the device's battery takes approximately 4 to 5 hours to completely charge.
- As the battery temperature approaches the ends of its temperature range (5°C/ 41°F to 50°C/122°F), it may take longer to charge the battery.

### **The batteries don't last very long.**

- Calibrate the battery. If your battery is new or has not been used for several weeks, calibrating the battery accurately sets the gas gauge.
- As your battery ages, its maximum capacity naturally decreases and even the best maintained batteries eventually need to be retired. Consider replacing the battery if you are not getting the usage you need from it.
- To meet ENERGY STAR® requirements, Wake on LAN is enabled by default. If running on battery power this may decrease battery run-time. To change Wake on LAN settings, open the Device Manager, Network Adapters and select the LAN device. Open the device Properties and select Power Management. Disable the Wake on LAN setting by unchecking. Allow this device to wake the computer.

### **The gas gauge isn't full after charging the battery.**

- This may indicate that the charging process terminated prematurely.

### **The gas gauge reads "full," but the charging LED is still lit.**

- If you charge your battery daily, rely on the gas gauge reading to determine battery capacity. The charging process may continue even if the gas gauge reads full. External power can be removed because the battery is virtually full.

### **My battery seems to have less and less capacity.**

- If your battery is new, or if you are using it for the first time, you will need to calibrate it (see Battery Calibration) prior to using it.
- As your battery ages, the maximum capacity that it can hold naturally decreases and even the best maintained batteries eventually need to be retired. Consider replacing the battery if you are not getting the usage you need from it.

## BT Wireless Transmission Problems

### **I cannot connect to another device with BT wireless technology.**

- Ensure that you have activated BT feature on both devices.
- Make sure that the distance between the two devices is within the acceptable limit and that there are no walls or other obstructions between the devices.
- Confirm that the other device is not in "Hidden" mode.
- Verify that both devices are compatible.

## Display Problems

### **The display performance is slow.**

- The temperature may be too cold. Move the device to a warmer operating environment.

### **The underlined, inverse, and hypertext characters are difficult to read on the screen.**

- Right click on the Windows Desktop, select Personalize, Colors to change the color and style of your Windows.

### **I changed my display resolution, but I see no difference on the screen.**

- Select  >  > Restart.

### **Nothing happens when I try to use the stylus on my touch screen.**

- If you cannot select objects accurately with the stylus, you may need to calibrate the touch screen.

### **The touch screen doesn't respond after a suspend.**

- The touch screen needs a few seconds to work after a suspend. Wait a moment and try again.

# Hard Disk Problems

## The hard disk will not spin up so the device can't boot up.


- This occurs if the unit is exposed to extreme low temperatures. This is not a hardware failure associated with the hard disk. The integrated hard disk drive heater will warm the drive to a safe operating temperature.

## The device does not startup properly.


- Make sure you remove any USB drives from the unit before you start it.
- Connect the AC adapter to charge the battery if it is not charged.
- If the battery does not begin charging, perform the following:
  1. Remove the battery.
  2. Connect the AC adapter.
  3. Turn on the device by pressing the POWER button.
  4. Reinstall the battery. The Battery LED is a steady blue while the battery is charging.

## Hard disk recovery process on Window 11


1. Select **Start**  > **Setting**  > **System** > **Recovery**.

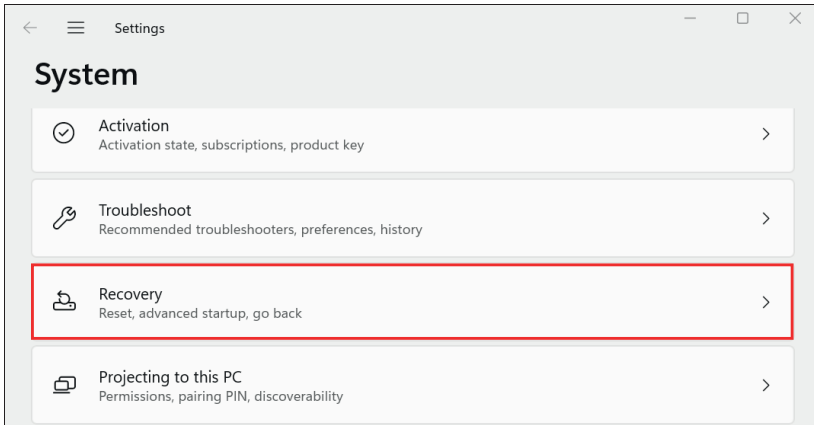

2. Select any of the three recovery methods that suits the best to solve the problem with your tablet PC:

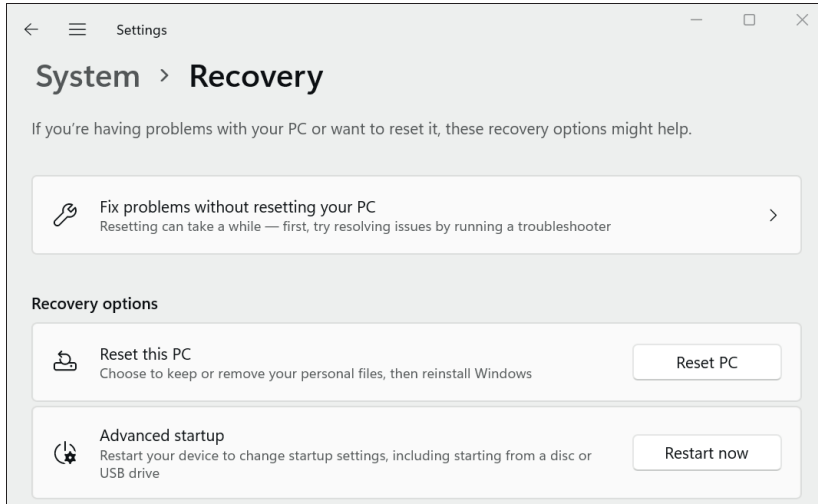

- **Fix problems without resetting your PC:** Select this option to run a troubleshooter. Make sure your tablet PC is connected to the network.
- **Reset this PC:** Select this option to reinstall the Windows 11 operating system. To reset your tablet PC, tap **Reset PC**. You are then prompted to keep or remove your personal files. Select either of the options and follow the on-screen instructions to complete the resetting procedure.

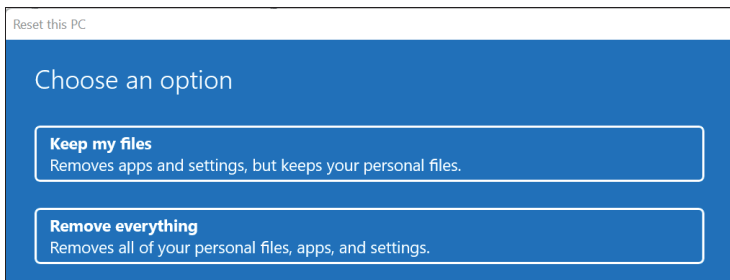



- **Advanced startup:** Select this option to restart your tablet PC with advanced startup features, such as automated startup repair, uninstall recently installed updates, use a restore point to restore your tablet PC, change settings in your tablet PC's UEFI firmware, recover Windows from the system image file, and more. To use this option, tap **Restart now**. Then follow the on-screen instructions to repair the system.

# Other Problems

## The device won't turn on.

- Make sure a fully charged battery is properly installed.
- Connect external power to charge the battery if it is not charged.
- If you are using the AC adapter check the electrical outlet you are using to make sure it is working properly.
- If the device does not turn on, reset the device by holding down the POWER button for at least ten seconds, release it, and then press the POWER button again.

## The device won't turn off.

1. Select  >  > **Shut down**.
2. If that does not work, press Ctrl + Alt + Del and then select Task Manager.
3. If any programs are open, use your arrow keys to highlight each one and select End task. Repeat this until all programs are closed.
4. If that still does not work, press and hold the POWER button for approximately ten seconds and then release it.

## The device doesn't make any sounds, even during boot-up.

- You may have enabled Stealth Mode. Disable Stealth mode.

# Appendix

## Copyright

Copyright© 2023. All rights reserved.

No part of this user manual may be transmitted, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without the prior written permission of the manufacturer. Information is subject to change without prior notice.

## Specifications

Model Name	Pad-Ex 01 P12 DZ2
Durability	<ul style="list-style-type: none"> <li>- MIL-STD 810H certified (Drop, Shock, Vibration, Rain, Dust, Altitude, Freeze/Thaw, High/Low Temperature, Temperature Shock, Humidity)</li> <li>- MIL-STD 461F certified (Conduction, Radiation, Conducted Susceptibility, Radiated Susceptibility)</li> <li>- IP 66 certified</li> <li>- Aluminum-magnesium alloy chassis</li> <li>- Port covers</li> <li>- Sunlight readable display</li> </ul>
Operating System	Windows® 10/11 Pro 64-bit
Processors	<ul style="list-style-type: none"> <li>- Intel® Core™ i7-1255U (12th Gen) Processor with vPro™ (12MB Cache, up to 4.7 GHz, 2P+8E cores)</li> <li>- Intel® Core™ i5-1235U (12th Gen) Processor with vPro™ (12MB Cache, up to 4.4 GHz, 2P+8E cores)</li> </ul>
Graphics	Intel® Iris® Xe Graphics
Memory	1 slot 8GB up to 32GB (4800MHz DDR5)
Storage	256GB NVMe PCIe SSD <ul style="list-style-type: none"> <li>- Optional 512GB/1TB PCIe SSD</li> </ul>
Display	11.6" FHD (1920 x1080) <ul style="list-style-type: none"> <li>- 1000 nits DynaVue® sunlight readable display with capacitive multi-touch screen</li> <li>- User selectable touch mode for Finger/Water, Glove, or Stylus programmable function</li> </ul>
Audio	<ul style="list-style-type: none"> <li>- Integrated microphone</li> <li>- Intel® High Definition Audio Compliant</li> <li>- Integrated speaker x 1</li> </ul>

## Appendix

Model Name	Pad-Ex 01 P12 DZ2
Camera	<ul style="list-style-type: none"><li>- Integrated 2.0 MP front-facing camera</li><li>- 8.0 MP auto-focus rear camera with flash</li></ul>
Keyboard & Input	6 buttons (2 user-definable keys)
Communications	<ul style="list-style-type: none"><li>- Intel® Wi-Fi 6E AX211 (802.11 ax)</li><li>- Bluetooth® V5.3</li><li>- Optional dedicated GPS module (UBLOX-NEO-M8N)<sup>1</sup></li><li>- Optional GPS and 4G LTE multi-carrier mobile broadband<sup>1</sup></li><li>- Optional RF antenna pass-through for GPS and WWAN<sup>1</sup></li></ul>
Security	<ul style="list-style-type: none"><li>- Intel® vPro™ Technology</li><li>- TPM 2.0</li><li>- NIST BIOS compliant</li><li>- Stealth mode</li><li>- Kensington lock</li><li>- Optional night vision mode<sup>4</sup></li></ul>
I/O Ports	<ul style="list-style-type: none"><li>- Thunderbolt 4 x 1</li><li>- USB 3.2 Gen 2 (type A) x 1</li><li>- Micro HDMI x 1</li><li>- Audio in/out (combo jack) x 1</li><li>- microSD card (microSDXC) x 1</li><li>- Docking connector (35-pin Pogo) x 1</li><li>- Nano SIM card x 1</li><li>- DC-In jack x 1</li><li>- Optional 1D/2D barcode reader x 1</li><li>- Optional RF antenna pass through for GPS and WWAN<sup>1</sup></li></ul>



Power	AC adapter : 100-240V, 50Hz-60Hz, 65W Typ 1: R11AH                    4100 mAh 11.1V Typ 2: R11AH2                 7800 mAh 11.1V Typ 3: R11AH                    3950 mAh 11.1V Typ 4: R11AH7-M               3900 mAh 11.1V Typ 5: R11AH7-H               6900 mAh 10.8V
Environment	- Temperature Operating: - 10°C ~ 55°C / - 4°F ~ 140°F Storage: -40°C ~ 71°C / -40°F ~ 160°F
Model Name	Pad-Ex 01 P12 DZ2
	- Humidity: 5% ~ 95%
Dimension	299 mm (L) x 192 mm (W) x 20 mm (H)
Weight	1.2 kg

**NOTE**

- Specifications are subject to change without any prior notice.
- ☒ <sup>1</sup> GPS/WWAN and dedicated GPS are mutually exclusive.
- ☒ <sup>2</sup> Mutually exclusive options.
- ☒ <sup>3</sup> Tested using the MobileMark 2014 battery life benchmark. Results may vary under different situations including hardware configuration, software, operating conditions, power management settings and other factors.
- ☒ <sup>4</sup> Night vision mode is available only for sunlight readable display.

# Regulatory Statement

## Federal Communications Commission

### Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Declaration of Conformity

This device complies with part 15 of the FCC rules. Operation is subject to the following conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

## RF exposure warning

- Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.
- This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.
- End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.
- For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

### **FCC RF Radiation Exposure Statement: Portable Device**

- This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment for body-worn configuration in direct contact to the phantom.
- This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

### **RF Exposure Information (SAR)**

- This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.
- The exposure standard for wireless devices employing a unit of measurement is known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg.
- The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines.
- SAR information on this device is on file with the FCC and can be found under the Display Grant section of [www.fcc.gov/oet/ea/fccid](http://www.fcc.gov/oet/ea/fccid) after searching on FCC ID: FKGR1102

<b>Europe: Model AX211NGW</b>	
<b>Software Version</b>	22.120.1.9
<b>Maximum Power Output</b>	
(2400 - 2483.5 MHz) IEEE802.11 b/g/n/ax mode	15dBm ± 1 dB max
(2400 - 2483.5 MHz) BLE / Bluetooth	9.5dBm ± 1.5 dB max
(5150 - 5725 MHz) IEEE802.11 a/n/ac/ax mode	14.5dBm ± 1 dB max
(5745 - 5875 MHz) IEEE802.11 a/n/ac/ax mode	14.5dBm ± 1 dB max
(5945 - 7105 MHz) IEEE802.11 ax mode	13dBm ± 1 dB max

**Europe: Model EM7565**

Software (Driver Package) Version: 01.08.04.00\_GENERIC\_002.012\_000

Band	Frequencies	Conducted Tx (Transmit) power tolerances
<b>LTE frequency band support</b>		
Band 1	Tx: 1,920–1,980 MHz	+23 dBm ± 1 dB
	Rx: 2,110–2,170 MHz	
Band 2	Tx: 1,850–1,910 MHz	+23 dBm ± 1 dB
	Rx: 1,930–1,990 MHz	
Band 3	Tx: 1,710–1,785 MHz	+23 dBm ± 1 dB
	Rx: 1,805–1,880 MHz	
Band 4	Tx: 1,710–1,755 MHz	+23 dBm ± 1 dB
	Rx: 2,110–2,155 MHz	
Band 5	Tx: 824–849 MHz	+23 dBm ± 1 dB
	Rx: 869–894 MHz	
Band 7	Tx: 2,500–2,570 MHz	+22 dBm ± 1 dB
	Rx: 2,620–2,690 MHz	

Band	Frequencies		Conducted Tx (Transmit) power tolerances
Band 8	900 MHz	Tx: 880–915 MHz	+23 dBm $\pm$ 1 dB
		Rx: 925–960 MHz	
Band 9	1800 MHz	Tx: 1,749.9–1,784.9 MHz	+23 dBm $\pm$ 1 dB
		Rx: 1,844.9–1,879.9 MHz	
Band 12	700 MHz	Tx: 699–716 MHz	+23 dBm $\pm$ 1 dB
		Rx: 729–746 MHz	
Band 13	700 MHz	Tx: 777–787 MHz	+23 dBm $\pm$ 1 dB
		Rx: 746–756 MHz	
Band 18	850 MHz	Tx: 815–830 MHz	+23 dBm $\pm$ 1 dB
		Rx: 860–875 MHz	
Band 19	850 MHz	Tx: 830–845 MHz	+23 dBm $\pm$ 1 dB
		Rx: 875–890 MHz	
Band 20	800 MHz	Tx: 832–862 MHz	+23 dBm $\pm$ 1 dB
		Rx: 791–821 MHz	
Band 26	850 MHz	Tx: 814–849 MHz	+23 dBm $\pm$ 1 dB
		Rx: 859–894 MHz	
Band 28	700 MHz	Tx: 703–748 MHz	+23 dBm $\pm$ 1 dB
		Rx: 758–803 MHz	
Band 30	2300 MHz	Tx: 2,305–2,315 MHz	+22 dBm $\pm$ 1 dB
		Rx: 2,350–2,360 MHz	
Band 41	2500 MHz	2,496–2,690 MHz	+22 dBm $\pm$ 1 dB
Band 42	3500 MHz	3,400–3,600 MHz	+22 dBm $\pm$ 1 dB
Band 43	3700 MHz	3,600–3,800 MHz	+22 dBm $\pm$ 1 dB
Band 48	3500 MHz	3,550–3,700 MHz	+22 dBm $\pm$ 1 dB
Band 66	1700 MHz	Tx: 1,710–1,780 MHz	+23 dBm $\pm$ 1 dB
		Rx: 2,110–2,200 MHz	
<b>WCDMA frequency band support</b>			
Band 1	2100 MHz	Tx: 1,920–1,980 MHz	+23 dBm $\pm$ 1 dB
		Rx: 2,110–2,170 MHz	
Band 2	1900 MHz	Tx: 1,850–1,910 MHz	+23 dBm $\pm$ 1 dB
		Rx: 1,930–1,990 MHz	
Band 4	1700 MHz	Tx: 1,710–1,755 MHz	+23 dBm $\pm$ 1 dB
		Rx: 2,110–2,155 MHz	
Band 5	850 MHz	Tx: 824–849 MHz	+23 dBm $\pm$ 1 dB
		Rx: 869–894 MHz	
Band 6	800 MHz	Tx: 830–840 MHz	+23 dBm $\pm$ 1 dB
		Rx: 875–885 MHz	
Band 8	900 MHz	Tx: 880–915 MHz	+23 dBm $\pm$ 1 dB
		Rx: 925–960 MHz	
Band 9	1800 MHz	Tx: 1,749.9–1,784.9 MHz	+23 dBm $\pm$ 1 dB
		Rx: 1,844.9–1,879.9 MHz	
Band 19	850 MHz	Tx: 830–845 MHz	+23 dBm $\pm$ 1 dB
		Rx: 875–890 MHz	

5150 ~ 5350 MHz is limited to indoor used in below countries.

	AT	BE	BG	CH	CY	CZ	DE
	DK	EE	EL	ES	FI	FR	HR
	HU	IE	IS	IT	LI	LT	LU
	LV	MT	NL	NO	PL	PT	RO
	SE	SI	SK	TR	UK(NI)		



## European Union CE & UKCA Marking and Compliance Notices

This product follows the provisions of the European Directive 2014/30/EU  
 This product follows the provisions of the European Directive 2014/34/EU  
 This product follows the provisions of the European Directive 2014/35/EU  
 This product follows the provisions of the European Directive 2014/53/EU  
 This product follows the provisions of the European Directive 2009/125/EC  
 This product follows the provisions of the European Directive 2012/19/EU  
 This product follows the provisions of the European Directive 2015/863/EU

### Battery Disposal

THIS PRODUCT CONTAINS A LITHIUM-ION OR NICKEL-METAL HYDRIDE BATTERY. IT MUST BE DISPOSED OF PROPERLY. CONTACT LOCAL ENVIRONMENTAL AGENCIES FOR INFORMATION ON RECYCLING AND DISPOSAL PLANS IN YOUR AREA.


## CLASS 2 LASER PRODUCT

### LASER CLASS 2 PRODUCT TO EN60825

**CAUTION (ATTENTION):** THIS APPLIANCE CONTAINS A LASER SYSTEM AND IS CLASSIFIED AS A "CLASS 2 LASER PRODUCT." TO USE THIS MODEL PROPERLY, READ THE INSTRUCTION MANUAL CAREFULLY AND KEEP THIS MANUAL FOR FUTURE REFERENCE. IN CASE OF ANY TROUBLE WITH THIS MODEL, PLEASE CONTACT YOUR NEAREST "AUTHORIZED SERVICE STATION." TO PREVENT DIRECT EXPOSURE TO THE LASER BEAM, DO NOT TRY TO OPEN THIS ENCLOSURE.



**LASER LIGHT-DO NOT STARE INTO BEAM**  
**RAYONNEMENT LASER-NE PAS REGARDER**  
**DANS LE FAISCEAU. MAX. 1 mW: 650 nm.**  
 IEC 60825-1:2007 and IEC 60825-1:2014.  
 Pulse duration of 16.8 mSec. Complies with  
 21CFR 1040.10 and 1040.11 except for  
 deviations pursuant to Laser Notice No. 50,  
 dated June 24, 2007.  
 CLASS 2 LASER PRODUCT.  
 APPAREIL A LASER DE CLASSE 2.



- Never direct the laser beam to people
- Never look at the direct beam from the laser or from a hand piece or one of its reflections

**ANNEX IV****Symbol for the marking of electrical and electronic equipment**

The symbol indicating separate collection for electrical and electronic equipment consists of the crossed-out wheeled bin, as shown below. The symbol must be printed visibly, legibly and indelibly.

**CAUTION FOR ADAPTER**

THE TABLET PC IS FOR USE WITH DEDICATED AC ADAPTER.

**BATTERY SAFETY**

DANGER OF EXPLOSION IF BATTERY IS INCORRECTLY REPLACED.  
REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE RECOMMENDED BY THE  
MANUFACTURER. DISPOSE OF USED BATTERIES ACCORDING TO THE  
MANUFACTURER'S INSTRUCTIONS.

# Safety Instructions


Always observe these safety instructions to ensure safe operation when handling the device.

- Do not place this device on an unstable table or surface. The device may fall, causing serious damage to its housing and components.
- Do not cover the device or block its air ventilation holes with any other objects.
- Do not use any sharp objects to tap on the display screen.
- Do not expose the device to direct sunlight and dusty environments.
- Keep the device away from excessive heat and humidity.
- Keep liquids away from the device.
- Keep the device away from any magnetic emitting devices, as this may affect the quality of the wireless signal reception.
- When using an AC adapter:
  - ✓ Place this device in a location close enough to an electrical outlet to accommodate the length of the power cord.
  - ✓ Operate this device only with the type of power source indicated on the marking label.
  - ✓ Disconnect the AC adapter from the electrical outlet if the device is not being used for an extended period.
- When cleaning the device,
  - ✓ Be sure to turn off the device fully and unplug the AC adapter before cleaning.
  - ✓ Only use a damp cloth to clean the device or accessories of it.
  - ✓ Do not use abrasive cleaners to clean the device.
- Do not attempt to disassemble or repair this device. Doing so will void the warranty.
- For hotspots, users can easily avoid touching the device by changing the way the device is held.
- For battery pack:
  - ✓ Replacement of a battery with an incorrect type that can defeat a safeguard.
  - ✓ Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
  - ✓ Leaving a battery in an extremely high temperature surrounding



environment that can result in an explosion or the leakage of flammable liquid or gas.

- ✓ A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- The equipment power supply cord shall be connected to a socket-outlet with earthing connection.

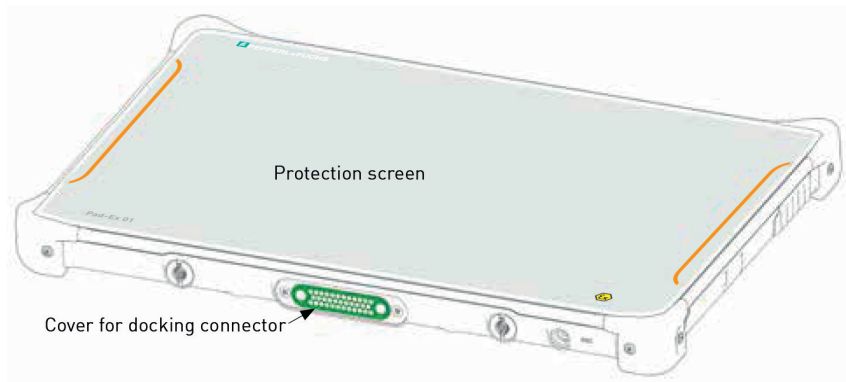

### Ex - Data

#### 1. ATEX

EC type approval test certificate no.: EPS 16 ATEX 1 163 X

Ex-marking: Ⓜ II 3G Ex ic op is IIC T4 Gc IP64

Ⓜ II 3D Ex ic op is IIIB T135°C Dc IP64

Ambient temperature:  $-10\text{ °C} \leq T_a \leq +55\text{ °C}$

#### 2. IECEx

IECEx Certificate of Conformity no.: IECEx EPS 16.0072X

Ex-marking: Ex ic op is IIC T4 Gc IP64

Ex ic op is IIIB T135°C Dc IP64

Ambient temperature:  $-10\text{ °C} \leq T_a \leq +55\text{ °C}$

#### 3. UKCA

refer to ATEX Certificate

### Specific conditions of use

The battery pack shall be removed, changed or charged only outside hazardous areas. The impact test according to IEC 60079-0 was performed with reduced height. The equipment shall be protected from impacts with high impact energy, against excessive UV light emission and high electrostatic charge generating processes. External connections shall never be used in hazardous areas. The interface cover shall be closed in hazardous areas. Only use a damp cloth to clean the device.

# ShopFloor Date Code Format Description

Format	Type	Year (unit digit)	Week	Origin	Year (tens digit)	Serial number
Example	SY	0	17	0	1	12345
Date Code	2	1	2	1	1	5
Total code numbers	12					

## Definition of the Date Code

### First Date Code: Type

SY ... System (complete machine)

### Second Date Code: Year (unit digit)

Last digit of the calendar year. Example: 2010 "0", 2015 "5"

### Third Date Code: Week

Week of the calendar year. Example: January 1 "1", January 8 "2"

### Fourth Date Code: Origin

0 ... Main Factory (Twinhead International Corp.)

### Fifth Date Code: Year (tens digit)

Tens digit of the calendar year. Example: 2010 "1", 2023 "2"

### Sixth Date Code: Serial number

Unique 5-character sequence number assigned to the batch.



# Your automation, our passion.

© 2023 Pepperl+Fuchs SE

The contents of this document, either in part or in their entirety, may not be reproduced, forwarded, distributed or saved in any way without Pepperl+Fuchs SE prior written consent. The contents of this document are presented as they currently exist. Pepperl+Fuchs SE does not provide any express or tacit guarantee for the correctness or completeness of the contents of this document, including, but not restricted to, the tacit guarantee of market suitability or fitness for a specific purpose unless applicable laws or court decisions make liability mandatory. Pepperl+Fuchs SE reserves the right to make changes to this document or to withdraw it any time without prior notice.

[www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

Subject to modifications · © Pepperl+Fuchs  
Printed in Germany · MAS-0223 · 01/2024  
WEEE-Reg.-Nr. DE 934 99306 · public



**Pepperl+Fuchs Quality**

Download our latest policy here:

[www.pepperl-fuchs.com/quality](http://www.pepperl-fuchs.com/quality)