

**Features**

- 2-channel isolated barrier
- 24 V DC supply (bus powered)
- Output 40 mA at 11.2 V DC, 52 mA current limit
- Contact or logic control input
- Entity parameter  $I_O/I_{SC} = 93 \text{ mA}$
- Line fault detection (LFD)

**Function**

This isolated barrier is used for intrinsic safety applications. It is used to supply power to solenoid valves, audible alarms, or LED indicators in the hazardous area.

It is controlled with a switch contact, transistor, or logic-level signal.


At full load, 11.2 V at 40 mA (with 52 mA current limit) is available for the hazardous area application.

This barrier has a low  $I_O/I_{SC} = 93 \text{ mA}$  entity parameter.


Line fault detection of the field circuit is indicated by a red LED and an output on the fault bus. The fault conditions are monitored via a Fault Indication Board.

This module mounts on a HiD Termination Board.

**Assembly**

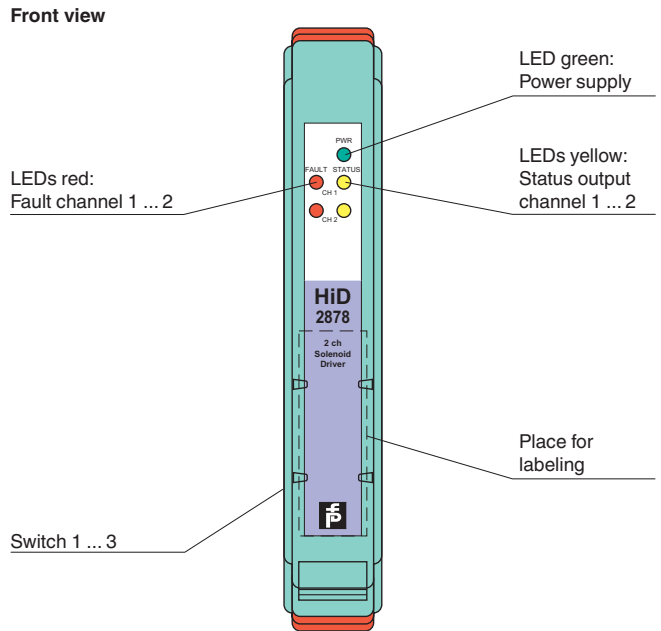

**Connection**

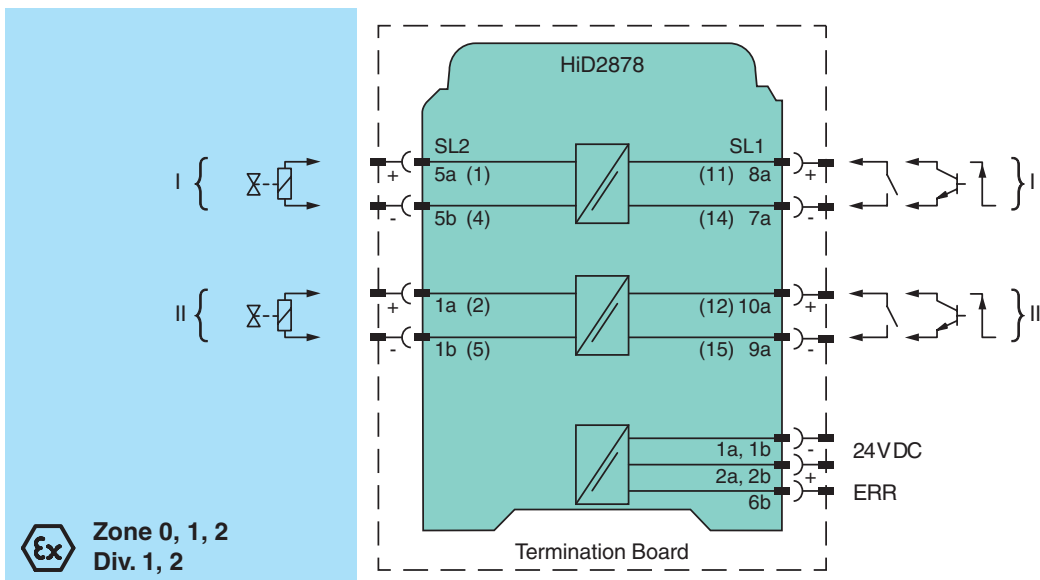



Release date 2012-06-28 09:44 Date of issue 2012-06-28 12:15:15\_eng.xml

<b>General specifications</b>		
Signal type		Digital Output
<b>Supply</b>		
Connection		SL1: 1a(-), 1b(-); 2a(+), 2b(+)
Rated voltage		20.4 ... 30 V via Termination Board
Input current		60 mA at 24 V, 300 Ω load (per channel)
Power loss		1 W at 24 V, 300 Ω load (per channel)
<b>Input</b>		
Connection		SL1: 8a(+), 7a(-); 10a(+), 9a(-)
Control input		external switch (dry contact or open collector) non isolated or logic signal input fully floating
Operating mode		output on with contact close or transistor on or logic level > 4 V output off with contact open or transistor off or logic level < 1.5 V
<b>Output</b>		
Connection		SL2: 5a(+), 5b(-); 1a(+), 1b(-)
Output voltage		40 mA at 11.2 V DC, 52 mA current limit
Load		0.1 ... 5 kΩ
Switching frequency	f	max. 250 Hz
Response time		turn-on time 1 ms, turn-off time 2 ms, at 300 Ω load
<b>Error message output</b>		
Connection		SL1: 6b
Output type		open collector transistor (internal fault bus)
Fault current		4 mA typical
Fault level		lead short-circuit detection at < 25 Ω lead breakage detection at > 100 kΩ typical
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2004/108/EC		EN 61326-1:2006
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2006 For further information see system description.
Protection degree		IEC 60529
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Relative humidity		5 ... 90 %, non-condensing up to 35 °C (95 °F)
<b>Mechanical specifications</b>		
Protection degree		IP20
Mass		approx. 140 g
Dimensions		18 x 106 x 128 mm (0.7 x 4.2 x 5 in)
Mounting		on Termination Board
Coding		pin 1 and 3 trimmed For further information see system description.
<b>Data for application in connection with Ex-areas</b>		
EC-Type Examination Certificate		CESI 02 ATEX 086 , for additional certificates see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a>
Group, category, type of protection		Ⓔ II (1)G [Ex ia Ga] IIC , Ⓔ II (1)D [Ex ia Da] IIIC
Output		Ex ia, Ex iaD
Voltage	U <sub>o</sub>	26 V
Current	I <sub>o</sub>	93 mA
Power	P <sub>o</sub>	605 mW
<b>Supply</b>		
Maximum safe voltage	U <sub>m</sub>	250 V AC (Attention! U <sub>m</sub> is no rated voltage.)
<b>Electrical isolation</b>		
Input/Output		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Output/power supply		safe electrical isolation acc. to EN 60079-11: 2007, voltage peak value 375 V
Output/Output		safe electrical isolation acc. to EN 60079-11:2007, voltage peak value 60 V
<b>Directive conformity</b>		
Directive 94/9/EC		EN 60079-0:2009, EN 60079-11:2007 , EN 60079-26:2007 , EN 61241-11:2006
<b>International approvals</b>		
CSA approval		
Control drawing		366-005CS-12B (cCSAus)
<b>General information</b>		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2012-06-28 09:44 Date of issue 2012-06-28 12:15:15\_eng.xml


Configuration

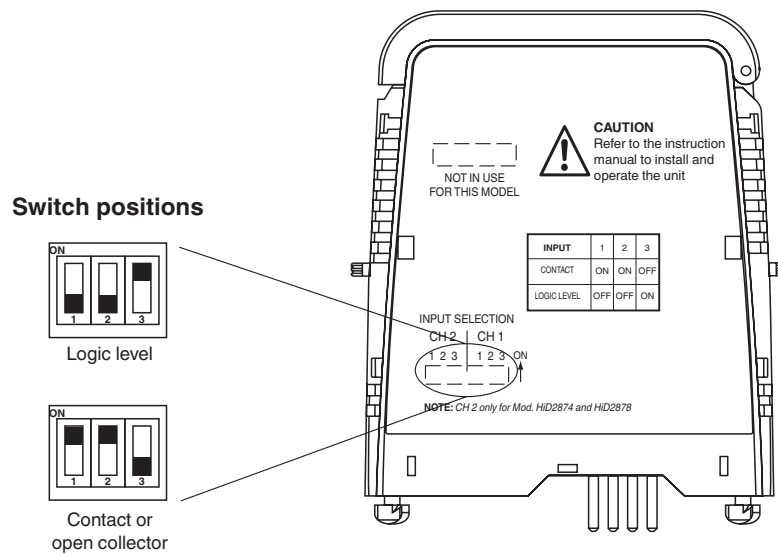


 Channel 2 only for HiD2874 and HiD2878.

Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.

 The pins for this device are trimmed to polarize it according to its safety parameter. Do not change! For further information see system description.

 When both channels of the solenoid driver are operated in normally energised condition, either the load must be reduced or increased spacing/ventilation be applied to reduce the temperature rise. Contact Pepperl+Fuchs for guidance.

Output characteristic

