





Dimensions

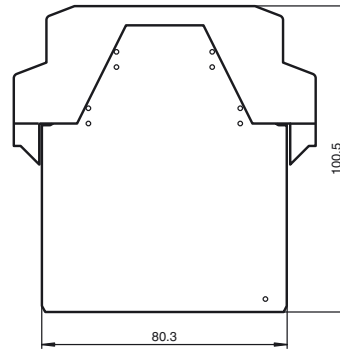

Model Number


SB4 Module 4COG

Safety control unit module
Module for Evaluation unit SafeBox - series SB4


Features

- Sensor module
- 4 sensor channels
- Single module for safety thru-beam sensors SLA12 and SLA29 and for 2 channel safety devices (emergency off)
- Micro-Controller controls
- Operating mode can be selected by means of DIP switches
- Connection of a number of separate de-energizing circuits

Electrical connection



Terminal	Function	Channel assignment
1	Receiver 2 input	Input
2	Receiver 2 +U	Channel 2
3	Transmitter 2 +U	Output
4	Transmitter 2 output	Channel 2
5	Receiver 1 input	Input
6	Receiver 1 +U	Channel 1
7	Transmitter 1 +U	Output
8	Transmitter 1 output	Channel 1
9	Transmitter 3 output	Output
10	Transmitter 3 +U	Channel 3
11	Receiver 3 +U	Input
12	Receiver 3 input	Channel 3
13	Transmitter 4 output	Output
14	Transmitter 4 +U	Channel 4
15	Receiver 4 +U	Input
16	Receiver 4 input	Channel 4

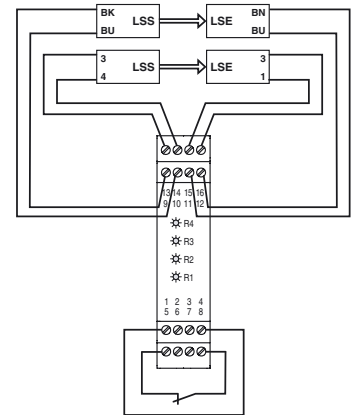

Connection example
(LSS = transmitter of light barrier; LSE = receiver of light barrier)

Technical data

General specifications

Operating mode ODER-Function

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T _M)	20 a
Type	4

Indicators/operating means

Function indicator	LED yellow (4x): indicator lamp channel 1 ... 4
Pre-fault indicator	LED yellow flashing: Indicator lamp channel 1 ... 4
Control elements	DIP-switch

Electrical specifications

Operating voltage U_B 24 V DC ± 20 % , via SB4 Housing

Input

Activation current approx. 7 mA

Conformity

Functional safety	ISO 13849-1 ; EN 61508 part1-4
Product standard	EN 61496-1

Ambient conditions

Ambient temperature	0 ... 50 °C (32 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)

Mechanical specifications

Degree of protection	IP20
Connection	screw terminals , lead cross section 0.2 ... 2 mm ²
Material	

Housing	Polyamide (PA)
Mass	approx. 150 g
Approvals and certificates	
CE conformity	CE
UL approval	cULus
TÜV approval	TÜV

This module can only be operated within an evaluation device of the SafeBox SB4 type.

The SafeBox instruction manual should be observed.

Function

The 4-channel sensor card module SB4-4COG makes it possible to connect light barriers or light grids or contact safety sensors in a one-channel version. Also, it contains the microcontroller control of the SafeBox.

This module is only contained once in a SafeBox SB4 and has to be mounted on slot 2. The module has a plug-in jumper. If the system contains additional assemblies, then this plug-in jumper has to be connected to the last slot.

This module allowed multiple separate de-energising circuits inside any SafeBox.

When the system is switched on, the software determines whether a light barrier or a contact safety sensor is switched on at a channel and monitors its presence during operation.

Contact safety sensors, which are connected to the SafeBox, must work according to the normally closed principle. An open contact indicates "safe state".

The channels 1 and 2 as well as 3 and 4 can be combined via an OR function when using light barriers.




Danger!

When using this function, it must be ensured that the effectiveness of the fusing is maintained. This must be checked on installation and commissioning.

Operating modes

The assembly has 4 DIP switches for selecting the OR-operation of neighbouring channels (1 OR 2 and 3 OR 4). For selecting functions, 2 selector switches must always be actuated. The functions are only effective if light barriers are connected.

Position of the DIP switches

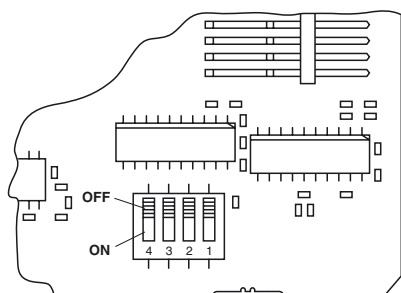

Switch	Position	Operation type
1 and 3	OFF	No OR-operation channel 1 and 2
	ON	OR-operation channel 1 and 2
2 and 4	OFF	No OR-operation channel 3 and 4
	ON	OR-operation channel 3 and 4

Displays

For each channel, there is a yellow LED on the front panel of the module.

Display	LED	Meaning
R1 - R4	yellow	Status of light barrier 1 ... 4 Off: light beam interrupted On: light beam released Flashing: light beam released, function reserve fallen short of (frequency approx. 2.5 Hz) Flashing fast: error (frequency approx. 5 Hz)

Release date: 2018-04-23 12:33 Date of issue: 2018-04-23 197116_eng.xml

Release date: 2018-04-23 12:33 Date of issue: 2018-04-23 197116_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com