

# Digital Output with Position Feedback

## LB2016E


- 1-channel
- 1 digital output, 2 digital inputs
- Installation in Zone 2 or safe area
- Inputs and output Ex ic
- Line fault detection switched on and off
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Permanently self-monitoring
- Output with watchdog
- Output with bus-independent safety shutdown
- Module can be exchanged under voltage



### Function

The digital output features 1 output with 2 feedback inputs. The device can be used to switch solenoids, sounders, or indicators (without line fault detection) in the field. Furthermore, the device accepts digital input signals of NAMUR sensors or mechanical contacts from the field. The output can be switched off via a contact. This can be used for bus-independent safety applications. Open and short circuit line faults are detected in on and off state. The intrinsically safe inputs and the output are galvanically isolated from the bus and the power supply.

### Connection Assignment

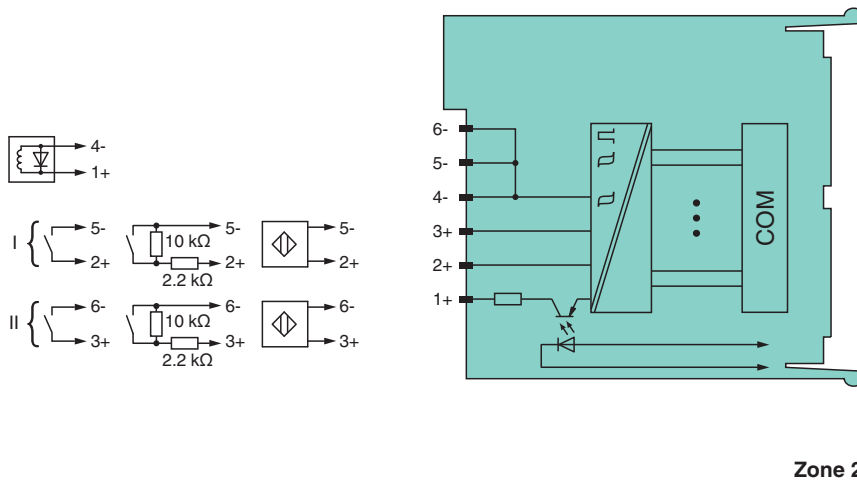

### Technical Data

|                     |   |
|---------------------|---|
| <b>Slots</b>        |   |
| Occupied slots      | 1   |
| <b>Supply</b>       |   |
| Connection          | backplane bus   |
| Rated voltage       | $U_r$ Use only in connection with the power supplies LB9*** |
| Power dissipation   | 1.3 W   |
| Power consumption   | 1.85 W  |
| <b>Internal bus</b> |   |
| Connection          | backplane bus   |
| Interface           | manufacturer-specific bus to standard com unit              |

Release date: 2022-10-21 Date of issue: 2022-10-21 Filename: 281971\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

| Digital input                        |           |   |
|--------------------------------------|-----------|---|
| Number of channels                   |           | 2   |
| Sensor interface                     |           |   |
| Connection                           |           | NAMUR sensor  |
| Connection [2]                       |           | volt-free contact   |
| Connection                           |           | channel I: 2+, 5-; channel II: 3+, 6-   |
| Rated values                         |           | acc. to EN 60947-5-6 (NAMUR)  |
| Switching point/switching hysteresis |           | 1.2 ... 2.1 mA / ± 0.2 mA   |
| Voltage                              |           | 8.2 V   |
| Internal resistor                    | $R_i$     | 1 k $\Omega$  |
| Line fault detection                 |           | can be switched on/off for each channel via configuration tool  |
| Connection                           |           | mechanical switch with additional resistors (see connection diagram) proximity switches without additional wiring   |
| Short-circuit                        |           | < 360 $\Omega$  |
| Open-circuit                         |           | < 0.35 mA   |
| Minimum pulse duration               |           | 1 ms  |
| Digital output                       |           |   |
| Number of channels                   |           | 1   |
| Suitable field devices               |           |   |
| Field device                         |           | Solenoid Valve  |
| Field device [2]                     |           | audible alarm   |
| Field device [3]                     |           | visual alarm  |
| Connection                           |           | channel I: 1+, 4-   |
| Internal resistor                    | $R_i$     | 258 $\Omega$  |
| Current limit                        | $I_{max}$ | 40 mA   |
| Open loop voltage                    | $U_s$     | 23 V  |
| Line fault detection                 |           | can be switched on/off for each channel via configuration tool , also when turned off (every 2.5 s the valve is turned on for 2 ms)   |
| Short-circuit                        |           | < 50 $\Omega$   |
| Open-circuit                         |           | > 10 k $\Omega$   |
| Response time                        |           | 20 ms (depending on bus cycle time)   |
| Watchdog                             |           | within 0.5 s the device goes in safe state, e.g. after loss of communication  |
| Indicators/settings                  |           |   |
| LED indication                       |           | Power LED (P) green: supply<br>Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit<br>Status LED (O: output, I1: input 1, I2: input 2) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) |
| Coding                               |           | optional mechanical coding via front socket   |
| Directive conformity                 |           |   |
| Electromagnetic compatibility        |           |   |
| Directive 2014/30/EU                 |           | EN 61326-1:2013   |
| Conformity                           |           |   |
| Electromagnetic compatibility        |           | NE 21   |
| Degree of protection                 |           | IEC 60529   |
| Environmental test                   |           | EN 60068-2-14   |
| Shock resistance                     |           | EN 60068-2-27   |
| Vibration resistance                 |           | EN 60068-2-6  |
| Damaging gas                         |           | EN 60068-2-42   |
| Relative humidity                    |           | EN 60068-2-78   |
| Ambient conditions                   |           |   |
| Ambient temperature                  |           | -40 ... 60 °C (-40 ... 140 °F)  |
| Storage temperature                  |           | -40 ... 85 °C (-40 ... 185 °F)  |
| Relative humidity                    |           | 95 % non-condensing   |

Release date: 2022-10-21 Date of issue: 2022-10-21 Filename: 281971\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com
 PEPPERL+FUCHS

## Technical Data

|  |                |   |
|--|----------------|---|
| Altitude   |                | max. 2000 m   |
| Shock resistance   |                | shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18   |
| Vibration resistance   |                | frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration $\pm 0.075$ mm/1 g; 10 cycles<br>frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration $\pm 1$ mm/0.7 g; 90 minutes at each resonance                                |
| Damaging gas   |                | designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3   |
| <b>Mechanical specifications</b>                               |                |   |
| Degree of protection   |                | IP20 when mounted on backplane  |
| Connection   |                | removable front connector with screw flange (accessory)<br>wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )  |
| Mass   |                | approx. 150 g   |
| Dimensions   |                | 16 x 100 x 102 mm (0.63 x 3.9 x 4 inch)   |
| <b>Data for application in connection with hazardous areas</b> |                |   |
| EU-type examination certificate                                |                | EXA 16 ATEX 0035X   |
| Marking  |                | Ⓜ II 3 G Ex nA [ic] IIC T4 Gc   |
| Input  |                |   |
| Voltage  | U <sub>o</sub> | 10 V  |
| Current  | I <sub>o</sub> | 13 mA   |
| Power  | P <sub>o</sub> | 33 mW (linear characteristic)   |
| Internal capacitance   | C <sub>i</sub> | 1.2 nF  |
| Internal inductance  | L <sub>i</sub> | 0 mH  |
| Output   |                |   |
| Voltage  | U <sub>o</sub> | 24.2 V  |
| Current  | I <sub>o</sub> | 108 mA  |
| Power  | P <sub>o</sub> | 654 mW  |
| Internal capacitance   | C <sub>i</sub> | 12 nF   |
| Internal inductance  | L <sub>i</sub> | 0 mH  |
| Galvanic isolation   |                |   |
| Input/power supply, internal bus                               |                | safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V   |
| Output/power supply, internal bus                              |                | safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V   |
| Directive conformity   |                |   |
| Directive 2014/34/EU   |                | EN IEC 60079-0:2018+AC:2020<br>EN 60079-11:2012<br>EN 60079-15:2010   |
| <b>International approvals</b>                                 |                |   |
| ATEX approval  |                | EXA 16 ATEX 0035X   |
| IECEx approval   |                | IECEx EXA 16.0010X  |
| Approved for   |                | Ex nA [ic] IIC T4 Gc  |
| <b>General information</b>                                     |                |   |
| System information   |                | The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity. For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure. |
| Supplementary information                                      |                | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .   |

**Assembly**

Front view

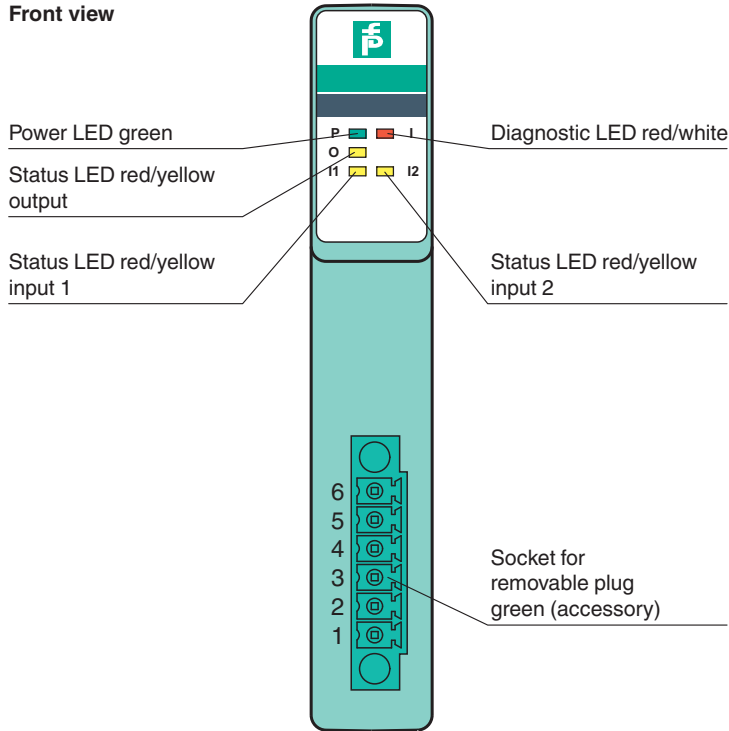

**Accessories**

|  |                      |                                 |
|--|----------------------|---------------------------------|
|  | <p><b>LB9180</b></p> | <p>Watchdog Plug, 1-channel</p> |
|--|----------------------|---------------------------------|

Release date: 2022-10-21 Date of issue: 2022-10-21 Filename: 281971\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com


USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


**Characteristic Curve**

**Load calculation**

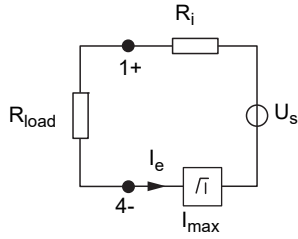

$R_{load}$  = Field loop resistance  
 $U_e = U_s - R_i \times I_e$   
 $I_e = U_s / (R_i + R_{load})$

**Output characteristics**

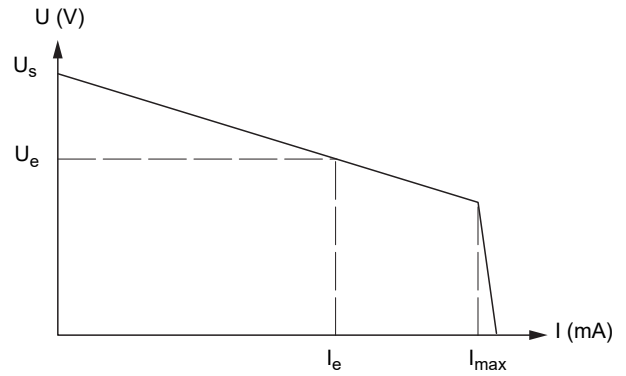

Release date: 2022-10-21 Date of issue: 2022-10-21 Filename: 281971\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".