



Distance sensor

OMR150M-R200-2EP-IO-0,3M-V15-L



- Medium design with versatile mounting options
- Space-saving distance sensors in small standardized design
- Measuring method PRT (Pulse Ranging Technology)
- IO-Link interface for service and process data
- Red laser light, laser class 1

Universal distance sensor, measurement to reflector, IO-Link interface, measuring method PRT, measuring range up to 150 m, red laser light, laser class 1, push-pull output, fixed cable with M12 plug



IO-Link

Function

The optical sensors in the series are the first devices to offer an end-to-end solution in a medium-sized standard design – from the thru-beam sensor through to the measuring distance sensor. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.


The distance sensor is based on pulse ranging technology (PRT) by Pepperl+Fuchs.

For small and large ranges, these distance sensors are very precise which makes them ideally suitable for positioning tasks. The red laser diode is clearly visible, allowing direct alignment of the device for reliable operation.

Application

- Precise positioning of stock feeders
- Precise and rapid positioning of moving carriages
- For use on gantry cranes and lifting equipment

Dimensions

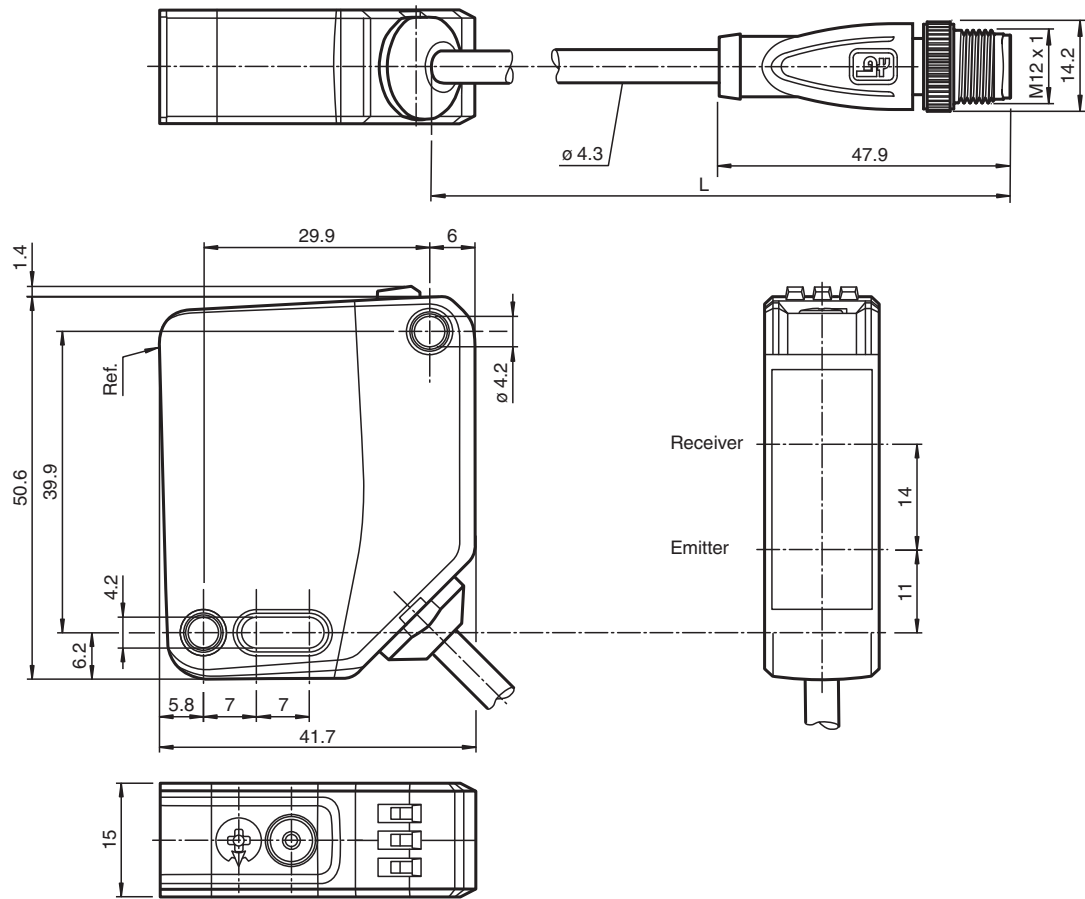

Technical Data

General specifications		
Measuring range		0.2 ... 150 m
Reference target		OFR-500/500
Light source		laser diode
Light type		modulated visible red light
Laser nominal ratings		
Note		LASER LIGHT , DO NOT STARE INTO BEAM
Laser class		1
Wave length		660 nm
Beam divergence		2 mrad
Pulse length		4 ns
Repetition rate		300 kHz
max. pulse energy		< 1.3 nJ
Measuring method		Pulse Ranging Technology (PRT)
Max. Motion velocity		10 m/s
Diameter of the light spot		< 20 mm at 10 m
Ambient light limit		10000 Lux
Resolution		1 mm
Temperature influence		< 0.25 mm/K
Functional safety related parameters		
MTTF _d		> 300 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data


Operation indicator		LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode
Function indicator		LED yellow: constantly on - switch output active constantly off - switch output inactive
Teach-in indicator		Teach-In : LED yellow/green; equiphase flashing; 2,5 Hz Teach Error: LED green/yellow non equiphase flashing; 8.0 Hz
Control elements		Teach-In key
Control elements		5-step rotary switch for operating modes selection
Electrical specifications		
Operating voltage	U_B	10 ... 30 V DC 18 ... 30 V from IO-Link
Ripple		10 % within the supply tolerance
No-load supply current	I_0	< 25 mA at 24 V Operating voltage
Protection class		III
Time delay before availability	t_v	< 900 ms
Interface		
Interface type		IO-Link (via C/Q = pin 4)
IO-Link revision		1.1
Device profile		Identification and Diagnosis - I&D Smart Sensor - SSP 4.2.1
Process data		Input 6 Byte - measurement value 4 Byte - scaling factor 8 Bit - signal quality 2 Bit - switching signal 1 1 Bit - switching signal 2 1 Bit - diagnosis signals n Bit - additional signals n Bit Output 2 Bit - sensor control function 1 Bit - evaluation control function 1 Bit
Vendor ID		1 (0x0001)
Device ID		1121047 (0x111B17)
Transfer rate		COM2 (38.4 kBit/s)
Min. cycle time		4 ms
SIO mode support		yes
Input		
Input type		Push/pull
Test input		emitter deactivation at $+U_B$
Output		
Switching type		The default setting is: C/Q - Pin4: push-pull output, IO-Link Q2 - Pin2: push-pull output
Signal output		2x push-pull outputs, reverse polarity protected, surge-proof
Switching voltage		max. 30 V DC
Switching current		max. 100 mA , resistive load
Usage category		DC-12 and DC-13
Voltage drop	U_d	≤ 1.5 V DC
Conformity		
Communication interface		IEC 61131-9 / IO-Link V1.1.3
Product standard		EN 61000-6-2, EN 61000-6-3
Laser safety		EN 60825-1:2014
Measurement accuracy		
Warm up time		5 min
Measured value output		1 ms
Average data age		3 ms (default), 6 ms , 12 ms , 25 ms , 50 ms , 100 ms , adjustable
Absolute accuracy		typ. ± 20 mm (including influence of temperature)
Repeat accuracy		< 6 mm

Release date: 2026-09-08 Date of issue: 2026-09-08 Filename: 295670-100416_eng.pdf


Technical Data

Approvals and certificates		
UL approval		E87056 , cULus Listed , class 2 power supply , type rating 1
CCC approval		CCC approval / marking not required for products rated ≤36 V
FDA approval		IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3 as described in Laser Notice 56, dated May 8, 2019.
Ambient conditions		
Ambient temperature		-30 ... 60 °C (-22 ... 140 °F)
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67 / IP69 / IP69K
Connection		300 mm fixed cable with plug, M12 x 1, 5 pin
Material		
Housing		PC (Polycarbonate)
Optical face		PMMA
Mass		approx. 37 g
Dimensions		
Height		50.6 mm
Width		15 mm
Depth		41.7 mm
Factory settings		
Switching output 1		Q1: switching signal high-active , Window mode 6000 ... 9000 mm
Switching output 2		Q2: switching signal high-active , Window mode 4000 ... 8000 mm

Connection Assignment



Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)

Release date: 2026-09-08 Date of issue: 2026-09-08 Filename: 295670-100416_eng.pdf

Assembly

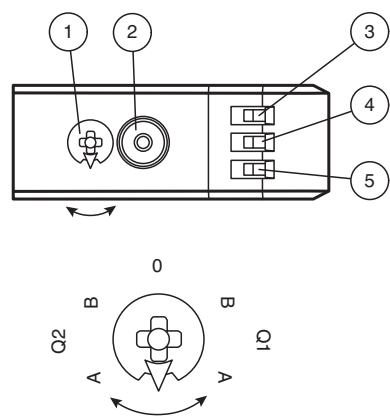

1	Mode rotary switch	
2	Teach-in button	
3	Switching output display Q2	YE
4	Switching output display Q1	YE
5	Operating indicator	GN

Q1B	Switching output 1/switch point B
Q1A	Switching output 1/switch point A
Q2A	Switching output 2/switch point A
Q2B	Switching output 2/switch point B
0	Keylock

Safety Information

Laser Class 1 Information
The irradiation can lead to irritation especially in a dark environment. Do not point at people!
Maintenance and repairs should only be carried out by authorized service personnel!
Attach the device so that the warning is clearly visible and readable.
Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Commissioning

Teach-In (TI)

Use the rotary switch for switching signal **Q1** or **Q2** to select the relevant switching threshold A and/or B to teach in.

- The yellow LEDs indicate the current state of the selected output.


To teach in a switching threshold, press and hold the "TI" button for approximately 1 s, until the yellow and green LEDs flash in phase. Teach-in starts when the "TI" button is released.

- Teach-in successful: the yellow and green LEDs flash alternately at 2.5 Hz.
- Teach-in unsuccessful: the yellow and green LEDs quickly flash alternately at 8 Hz.


After an unsuccessful Teach-in, the sensor continues to operate with the previous valid setting after the relevant visual fault signal is issued.

Set switching mode: you can define different switching modes by teaching in the relevant distance data for switching thresholds A and B.

1. Single point mode:

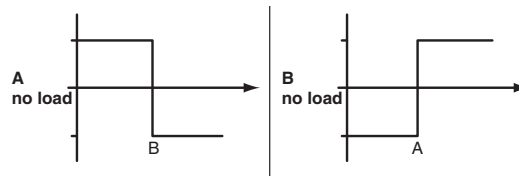

2. Window mode, factory setting:

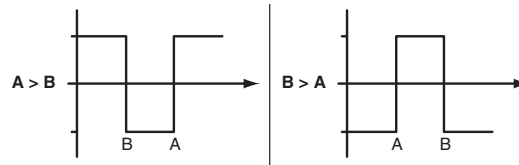

Teach in switching thresholds: you can teach in or overwrite a taught-in switching threshold at any time. To do this, press the "TI" button again.

Reset a value: you can reset a taught-in value. To do this, press the "TI" button for > 4 s, until the yellow and green LEDs go out. The reset process itself starts when the "TI" button is released.

- Reset successful: the yellow and green LEDs flash alternately at 2.5 Hz.

Resetting to Factory Settings

To revert back to factory settings, press the "TI" button for > 10 s with the rotary switch set to position "O," until the yellow and green LEDs go out at the same time. The reset process itself starts when the "TI" button is released.

- Reset to factory settings successful: the yellow and green LEDs light up at the same time. The sensor then continues to operate with factory settings.

Configuration

Setting different operating modes via the IO-Link interface

The devices are equipped with an IO-Link interface as standard for diagnostics and parameterization tasks to ensure optimum adjustment of the sensors to the relevant application.


Single point mode operating mode (one switch point):

- "Detection of objects irrespective of type and color in a defined detection range. Objects in the background are suppressed.
- "The switch point corresponds exactly to the set point.



Window mode operating mode (two switch points):


- Detection of objects irrespective of type and color in a defined detection range. Reliable detection when object leaves the detection range.
- Window mode with two switch points.

**Center window mode operating mode (one switch point):**

- Detection of objects irrespective of type and color in a defined detection range. Sets a defined window around a given object. Objects outside this window are not detected.
- Window mode with one switch point.

**Two point mode operating mode (hysteresis operating mode):**

- Detection of objects irrespective of type and color between a defined switch-on and switch-off point.

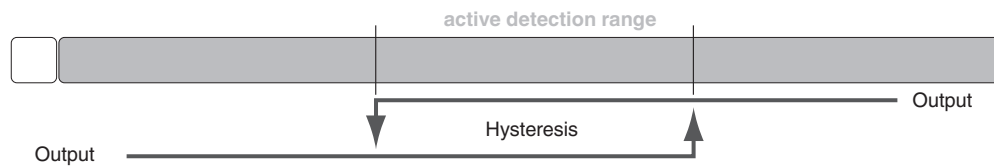**Inactive operating mode:**

- Evaluation of switching signals is deactivated.

The associated IODD device description file can be found in the download area at www.pepperl-fuchs.com.