

## Double sheet sensor UDB-18GS-2E1-0,2M-V15

- Ultrasonic system for reliable detection of no, one, or two overlapping sheet materials
- Insensitive to printing, colors, and shining surfaces
- Perpendicular or inclined sensor mounting relative to the sheet plane possible
- Simplified commissioning
- Integrated alignment aid
- No TEACH-IN required
- Short version



### Function


The ultrasonic double-sheet detector is used wherever automatic differentiation between single and double sheets is necessary to protect machines or prevent rejects. The double sheet detection is based on the ultrasonic thru-beam principle.

The following situations can be detected:

- No sheet, i. e. air
- Single sheet
- Double sheet or multiple sheets (a statement on the number of sheets is not possible here)

The signals are evaluated by a microprocessor system. As a result of the evaluation, corresponding switching outputs are set.

### Dimensions

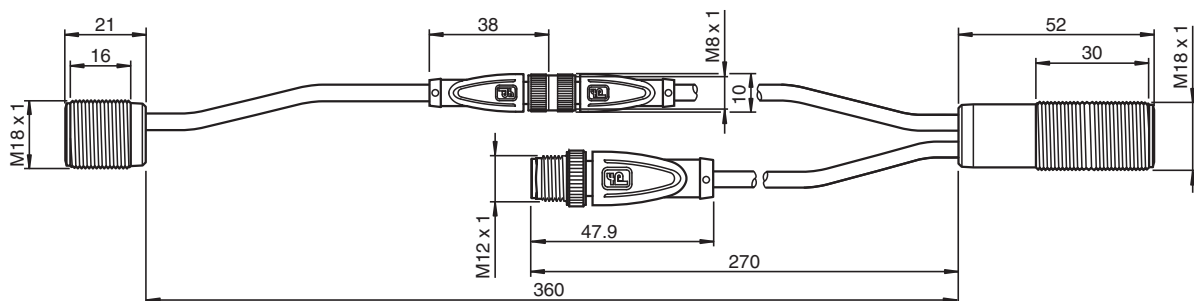

### Technical Data

#### General specifications

Sensing range	20 ... 60 mm , optimal distance: 45 mm
Transducer frequency	approx. 255 kHz

#### Memory

Non-volatile memory	EEPROM
Write cycles	300000

#### Indicators/operating means

LED green	indication: single sheet detected
LED yellow	indication: no sheet detected (Air)

Release date: 2023-02-16 Date of issue: 2023-02-16 Filename: 70120101-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Technical Data

LED red		indication: double sheet detected flashing: device error
<b>Electrical specifications</b>		
Operating voltage	$U_B$	18 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current	$I_0$	≤ 40 mA
Power consumption	$P_0$	≤ 550 mW
Time delay before availability	$t_v$	≤ 300 ms
<b>Input</b>		
Input type		Function input 0-level: $-U_B \dots -U_B + 1V$ 1-level: $+U_B - 1V \dots +U_B$
Pulse length		≥ 100 ms
Impedance		≥ 60 kΩ
<b>Output</b>		
Designation		OUT 1, 2
Number		2
Output function		OUT 1: single sheet detected OUT 2: double sheet detected
Output type		switching output: NPN , NC contact
Rated operating current	$I_e$	100 mA per output
Voltage drop	$U_d$	≤ 3 V
Switch-on delay	$t_{on}$	15 ms
Switch-off delay	$t_{off}$	15 ms
Fusing		reverse polarity protected , overload and short-circuit resistant
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose, Class 2 Power Source
CCC approval		CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>		
Ambient temperature		0 ... 60 °C (32 ... 140 °F)
Storage temperature		-25 ... 70 °C (-13 ... 158 °F)
<b>Mechanical specifications</b>		
Connection type		fixed cable with plug
Housing length		
Ultrasonic transmitter		21 mm
Ultrasonic receiver		52 mm
Housing diameter		
Ultrasonic transmitter		18 mm
Ultrasonic receiver		18 mm
Degree of protection		IP54
Material		
Housing		Stainless steel 1.4305/AISI 303, polyamide plastic parts
Transducer		epoxy resin/hollow glass sphere mixture; polyurethane foam
Connector		
Threading		M12 x 1
Number of pins		5
Cable		
Cable diameter		4.3 mm
Bending radius		5 x diameter , fixed
Material		PUR
Color		black

Release date: 2023-02-16 Date of issue: 2023-02-16 Filename: 70120101-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**


## Technical Data

Length	L	approx. 200 mm
Mass		75 g
Tightening torque, fastening screws		max. 20 Nm

## Connection



## Connection Assignment



## Installation

### Hinweis


Only use the cables specified by Pepperl+Fuchs for this purpose to extend the connecting cable between the transmitter and receiver of the ultrasonic double sheet detectors. The use of other cables will result in impairment of the sensor function or even loss of function.

## Mounting

### Mounting/Adjustment

Recommended distances

- a = 5 ... 15 mm
- b ≥ 10 mm
- d = 40 ... 45 mm

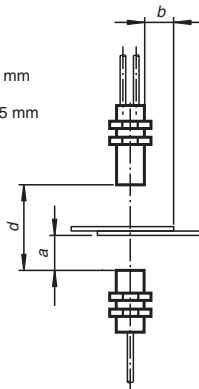


Release date: 2023-02-16 Date of issue: 2023-02-16 Filename: 70120101-100001\_eng.pdf

## Mounting


### Mounting/Adjustment

(for very thick papers)

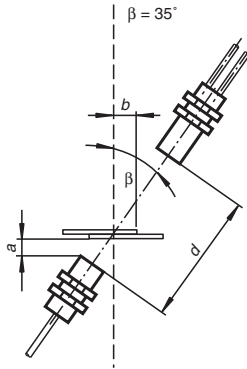


#### Angular misalignment

$\alpha < +/- 1^\circ$



#### Sensor offset

$s < +/- 1 \text{ mm}$



## Commissioning






### Operating Modes

The sensor has fixed thresholds that ensure the detection of double sheet events over a very wide range of materials. Feedback on the detected state (= "air", "single sheet", or "double sheet") is provided via the two switching outputs of the sensor. Please refer to the technical data to find out which output reports which state. The third state is present if neither of the other two states is reported.

### Further Documentation

For detailed information on mounting, alignment and commissioning you may refer to the commissioning instruction of the sensor.

## Accessories

	<b>V15-G-BK2M-PUR-U</b>	Female cordset single-ended M12 straight A-coded, 5-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant
	<b>MH-UDB01</b>	Mounting bracket for double sheet monitor
	<b>AA-UDB-18GM-01</b>	alignment aid for double sheet sensor
	<b>V31-GM-1M-PUR-V31-GM-UDB/UDC</b>	1 m cable for extension between emitter and receiver for UDB-18GS-..., UDC-18GS-... und UDC(M)-30GS-...
	<b>V31-GM-2M-PUR-V31-GM-UDB/UDC</b>	2 m cable for extension between emitter and receiver for UDB-18GS-..., UDC-18GS-... and UDC(M)-30GS-...

Release date: 2023-02-16 Date of issue: 70120101-100001\_eng.pdf