


Diffuse mode sensor with rectangular light spot for clear object detection, 200 mm detection range, red light, light/dark on, sensitivity adjuster, DC version, NPN output, M8 plug




Function

The optical sensors of this series are suitable for both standard and demanding applications. The series features a miniature housing design, two M3 metal-threaded mounting holes and a highly visible LED status indicator. Each device is equipped with a sensitivity adjuster and a light-on/dark-on changeover switch for increased flexibility. A wide variety of versions are available in both infrared light and red light with PowerBeam for easy alignment. Special versions with BlueBeam are suitable for challenging applications like those in the solar and battery industries.

Dimensions

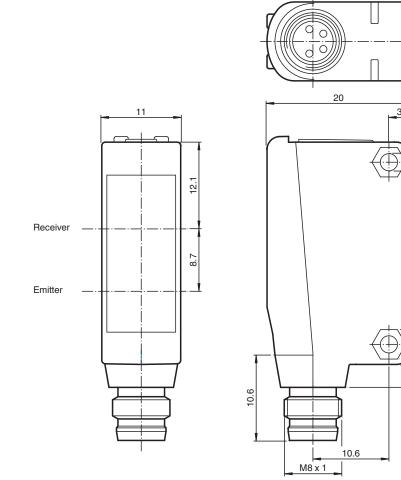

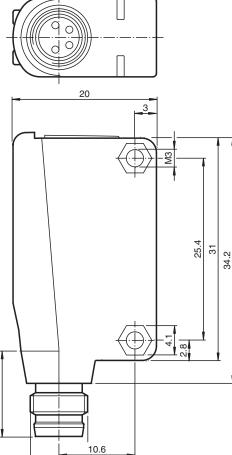

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 235962_eng.pdf

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

Technical Data


| General specifications | | |
|--------------------------------------|----------------|---|
| Detection range | | 0 200 mm |
| Adjustment range | | 15 200 mm |
| Reference target | | standard white,200 mm x 200 mm |
| Light source | | LED |
| Light type | | modulated visible red light |
| Polarization filter | | no |
| Diameter of the light spot | | approx. 170 mm at a distance of 200 mm |
| Optical face | | frontal |
| Ambient light limit | | EN 60947-5-2:2007+A1:2012 |
| Functional safety related parameters | | |
| MTTF _d | | 860 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Indicators/operating means | | |
| Operation indicator | | LED green: power on |
| Function indicator | | LED yellow, lights up with receiver lit |
| Control elements | | sensitivity adjustment |
| Control elements | | Light-on/dark-on changeover switch |
| Electrical specifications | | |
| Operating voltage | UB | 10 30 V DC |
| Ripple | 5 | max. 10 % |
| No-load supply current | Io | < 20 mA |
| Output | 0 | |
| Switching type | | The switching type of the sensor is adjustable. The default setting is: light-on |
| Signal output | | 1 NPN output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage | | max. 30 V DC |
| Switching current | | max. 100 mA , resistive load |
| Voltage drop | U _d | ≤ 1.5 V DC |
| Switching frequency | f | 1000 Hz |
| Response time | | 0.5 ms |
| Conformity | | |
| Product standard | | EN 60947-5-2 |
| Approvals and certificates | | |
| UL approval | | cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure |
| CCC approval | | CCC approval / marking not required for products rated ≤36 V |
| Ambient conditions | | |
| Ambient temperature | | -30 60 °C (-22 140 °F) |
| Storage temperature | | -40 70 °C (-40 158 °F) |
| Mechanical specifications | | |
| Housing width | | 11 mm |
| Housing height | | 31 mm |
| Housing depth | | 20 mm |
| Degree of protection | | IP67 |
| Connection | | plug M8 x 1 , 4-pin |
| Material | | |
| Housing | | PC (Polycarbonate) |
| Optical face | | РММА |
| Mass | | approx. 10 g |
| Tightening torque, fastening screws | | 0.6 Nm |

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 Get

 www.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com

Connection




Connection Assignment



Wire colors in accordance with EN 60947-5-2


| 1 | BN | (brown) |
|---|----|---------|
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |

Assembly



| 1 | Light-Dark-switching | |
|---|----------------------|--------|
| 2 | Sensitivity adjuster | |
| 3 | Signal display | yellow |
| 4 | Operating display | green |

Characteristic Curve

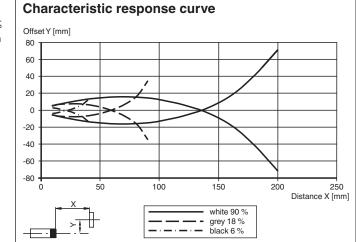



Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

3

ML100-8-W-200-RT/95/102

Characteristic Curve





Accessories

| Contraction of the second seco | OMH-ML100-09 | Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm |
|--|---------------|---|
| 1. STA | OMH-ML100-01 | Mounting aid for ML100 series, mounting bracket |
| | OMH-ML100-03 | Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm |
| | OMH-ML100-04 | Mounting aid for ML100 series, mounting bracket |
| | OMH-ML100-05 | Mounting aid for ML100 series, mounting bracket |
| ~ ~ | OMH-F10-ML100 | Mounting aid for ML100 series |
| | OMH-10 | Mounting aid for ML100 series |
| | OMH-ML100-S1 | Mounting bracket |

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Diffuse mode sensor

| Accessories | | | | |
|-------------|---------------|--|--|--|
| 6 / | V31-GM-2M-PUR | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey | | |
| 6/ | V31-WM-2M-PUR | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey | | |

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 Get

 www.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com

