


Inductive sensor


NJ15-30GK-N-150



- 15 mm non-flush
- Temperature range
-25 ... 150 °C (-13 ... 302 °F)

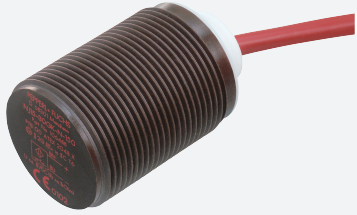

Dimensions



Technical Data

| General specifications | | |
|--------------------------------------|-------|--------------------------------------|
| Switching function | | Normally closed (NC) |
| Output type | | NAMUR |
| Rated operating distance | s_n | 15 mm |
| Installation | | non-flush |
| Assured operating distance | s_a | 0 ... 12.15 mm |
| Reduction factor r_{Al} | | 0.4 |
| Reduction factor r_{Cu} | | 0.3 |
| Reduction factor r_{304} | | 0.85 |
| Output type | | 2-wire |
| Nominal ratings | | |
| Nominal voltage | U_o | 8.2 V (R_i approx. 1 k Ω) |
| Switching frequency | f | 0 ... 100 Hz |
| Current consumption | | |
| Measuring plate not detected | | min. 3 mA |
| Measuring plate detected | | \leq 1 mA |
| Functional safety related parameters | | |

Release date: 2024-01-09 Date of issue: 2024-01-09 Filename: 70133189_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

| | | |
|---|---|---|
| MTTF _d | | 4540 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Compliance with standards and directives | | |
| Standard conformity | | |
| NAMUR | | EN 60947-5-6:2000 IEC 60947-5-6:1999 |
| Standards | | EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012 |
| Approvals and certificates | | |
| IECEX approval | | |
| Equipment protection level Ga | | IECEX PTB 11.0037X |
| Equipment protection level Gb | | IECEX PTB 11.0037X |
| Equipment protection level Da | | IECEX PTB 11.0037X |
| Equipment protection level Mb | | IECEX PTB 11.0037X |
| ATEX approval | | |
| Equipment protection level Ga | | PTB 00 ATEX 2048 X |
| Equipment protection level Gb | | PTB 00 ATEX 2048 X |
| Equipment protection level Da | | PTB 00 ATEX 2048 X |
| UL approval | | |
| Ordinary Location | | E87056 |
| Hazardous Location | | E501628 |
| Control drawing | | 116-0452 |
| CCC approval | | |
| Hazardous Location | | 2020322315002257 |
| NEPSI approval | | |
| NEPSI certificate | | GYJ16.1393X |
| CML approval | | on request |
| ANZEx | | 18.3018X |
| Ambient conditions | | |
| Ambient temperature | | -25 ... 150 °C (-13 ... 302 °F) |
| Mechanical specifications | | |
| Connection type | | cable |
| Housing material | | PPS |
| Sensing face | | PPS |
| Degree of protection | | IP65 |
| Cable | | |
| Cable diameter | | 4.8 mm ± 0.2 mm |
| Bending radius | | > 10 x cable diameter |
| Material | | SIHF |
| Core cross section | | 0.34 mm ² |
| Length | L | 2 m |
| Dimensions | | |
| Length | | 47 mm |
| Diameter | | 30 mm |
| General information | | |
| Use in the hazardous area | | see instruction manuals |


Release date: 2024-01-09 Date of issue: 2024-01-09 Filename: 70133189_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Connection



Release date: 2024-01-09 Date of issue: 2024-01-09 Filename: 70133189_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com