


Laser triangulation sensor with background suppression, ultra-small design with M3 mounting, 15 mm sensing range, PNP output, 2 m fixed cable

The R3 series nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Dimensions





Technical Data

General specifications	
Detection range	7 15 mm
Reference target	standard white, 100 mm x 100 mm
Light source	laser diode
Light type	modulated visible red light, 680 nm
Laser nominal ratings	
Note	LASER LIGHT , DO NOT STARE INTO BEAM
Laser class	1
Wave length	680 nm
Beam divergence	> 5 mrad
Pulse length	approx. 3 µs

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



1

OBT15-R3-E2-L


I	 	
Tec		

rechinear Data		
Repetition rate		approx. 16.6 kHz
max. pulse energy		9.5 nJ
Black-white difference (6 %/90 %)		< 3 % at 15 mm
Diameter of the light spot		approx. 1.5 mm at a distance of 15 mm
Opening angle		approx. 2 °
Optical face		frontal
Ambient light limit		EN 60947-5-2 : 30000 Lux
Functional safety related parameters		
MTTF _d		800 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green, statically lit Power on , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator		LED yellow ON: lights when object is detected
Electrical specifications		
Operating voltage	UB	12 24 V
No-load supply current	I ₀	< 10 mA
Protection class	.0	
Output		
Switching type		NO contact
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 50 w A , resistive load
Voltage drop	U _d	$\leq 1.5 \text{ V DC}$
Switching frequency	f	approx. 2 kHz
Response time		250 μs
Conformity		230 μ8
Product standard		EN 60947-5-2
Laser safety		EN 60825-1:2007
Approvals and certificates		LN 00025-1.2007
EAC conformity		TR CU 020/2011
UL approval		E87056, cULus Recognized, Class 2 Power Source
CCC approval		CCC approval / marking not required for products rated ≤36 V
		IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations
FDA approval		pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions		
Ambient temperature		-25 60 °C (-13 140 °F)
Storage temperature		-30 70 °C (-22 158 °F)
Mechanical specifications		
Housing width		7.5 mm
Housing height		26 mm
Housing depth		13.8 mm
Degree of protection		IP67
Connection		2 m fixed cable
Material		
Housing		PC/ABS and TPU
Optical face		glass
Cable		PUR
Mass		approx. 20 g
Cable length		2 m


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group www.pepperl-fuchs.com

Connection




Assembly



1	Operating display green		
2	Signal display yellow		
3	Emitter		
4	Receiver 1		
5	Receiver 2		

Characteristic Curve

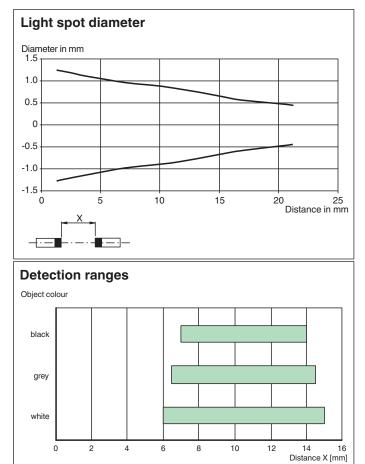

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"


Pepperl+Fuchs Group www.pepperl-fuchs.com

3

Safety Information



CLASS 1 LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007



Accessories

1000	MH-R3-01	Mounting aid for sensors from the R3 series, mounting bracket
0.00 HI	MH-R3-02	Mounting aid for sensors from the R3 series, mounting bracket
, 000 HT	MH-R3-03	Mounting aid for sensors from the R3 series, mounting bracket
3°° 11	MH-R3-04	Mounting aid for sensors from the R3 series, mounting bracket

0

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

4