




Thru-beam sensor (pair) OBE10M-R3-SE2-0,2M-V3-L



- Ultra-small housing design
- DuraBeam Laser Sensors - durable and employable like an LED
- 45° cable outlet for maximum mounting freedom under extremely tight space constraints
- Improvement in machine availability with abrasion-resistant, antistatic glass front


Laser thru-beam sensor, ultra-small design with M3 mounting, very high 10 m detection range, PNP output, 200 mm fixed cable with plug M8, 3-pin



Function

The R3 series nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Dimensions

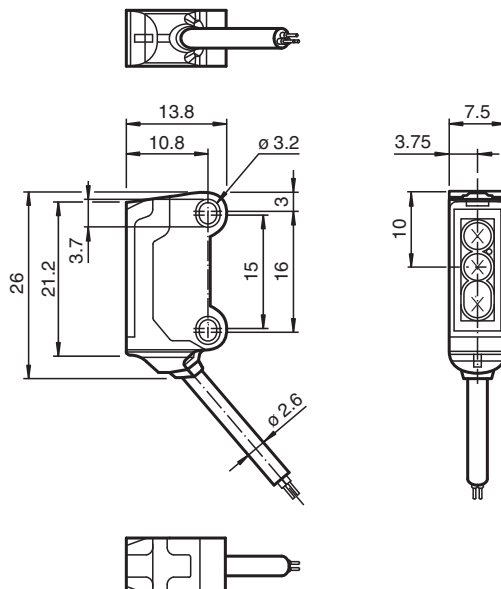

Release date: 2022-06-27 Date of issue: 2022-06-27 Filename: 282079_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Technical Data

System components			
Emitter			OBE10M-R3-0,2M-V3-L
Receiver			OBE10M-R3-E2-0,2M-V3-L
General specifications			
Effective detection range			0 ... 10 m
Threshold detection range			15 m
Light source			laser diode
Light type			modulated visible red light , 680 nm
Laser nominal ratings			
Note			LASER LIGHT , DO NOT STARE INTO BEAM
Laser class			1
Wave length			680 nm
Beam divergence			> 5 mrad
Pulse length			approx. 3 µs
Repetition rate			approx. 16.6 kHz
max. pulse energy			9.5 nJ
Diameter of the light spot			approx. 20 mm at a distance of 10 m
Opening angle			approx. 0.5 °
Optical face			frontal
Ambient light limit			EN 60947-5-2 : 30000 Lux
Functional safety related parameters			
MTTF _d			806 a
Mission Time (T _M)			20 a
Diagnostic Coverage (DC)			0 %
Indicators/operating means			
Operation indicator			LED green, statically lit Power on , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator			Receiver: LED yellow, lights up when light beam is free, flashes when falling short of the stability control ; OFF when light beam is interrupted
Electrical specifications			
Operating voltage	U _B		12 ... 24 V
No-load supply current	I ₀		Emitter: ≤ 10 mA Receiver: ≤ 8 mA
Protection class			III
Input			
Test input			Test of switching function at 0 V
Output			
Switching type			NO contact
Signal output			1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage			max. 30 V DC
Switching current			max. 50 mA , resistive load
Voltage drop	U _d		≤ 1.5 V DC
Switching frequency	f		approx. 2 kHz
Response time			250 µs
Conformity			
Product standard			EN 60947-5-2
Laser safety			EN 60825-1:2007
Approvals and certificates			
EAC conformity			TR CU 020/2011
UL approval			E87056 , cULus Recognized, Class 2 Power Source
CCC approval			CCC approval / marking not required for products rated ≤36 V
FDA approval			IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions			
Ambient temperature			-20 ... 60 °C (-4 ... 140 °F)



Release date: 2022-06-27 Date of issue: 2022-06-27 Filename: 282079_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".






Technical Data

Storage temperature	-30 ... 70 °C (-22 ... 158 °F)
Mechanical specifications	
Housing width	7.5 mm
Housing height	26 mm
Housing depth	13.8 mm
Degree of protection	IP67
Connection	200 mm fixed cable with 3-pin, M8 x 1 connector
Material	
Housing	PC/ABS and TPU
Optical face	glass
Cable	PUR
Mass	approx. 10 g per sensor
Cable length	200 mm

Connection



Accessories

	V3-WM-2M-PUR	Female cordset single-ended M8 angled A-coded, 3-pin, PUR cable grey
	MH-R3-01	Mounting aid for sensors from the R3 series, mounting bracket
	MH-R3-02	Mounting aid for sensors from the R3 series, mounting bracket
	MH-R3-03	Mounting aid for sensors from the R3 series, mounting bracket
	MH-R3-04	Mounting aid for sensors from the R3 series, mounting bracket