



I/O hub


ICA-16DIO-G60AL-IO

- Sturdy metallic housing
- IO-link interface for service and process data
- 16 digital inputs/outputs can be configured
- Logic level can be configured per port
- Filter time can be configured per port
- Pulse extension can be configured per port

I/O hub with IO-Link interface for 16 digital inputs/outputs



Dimensions

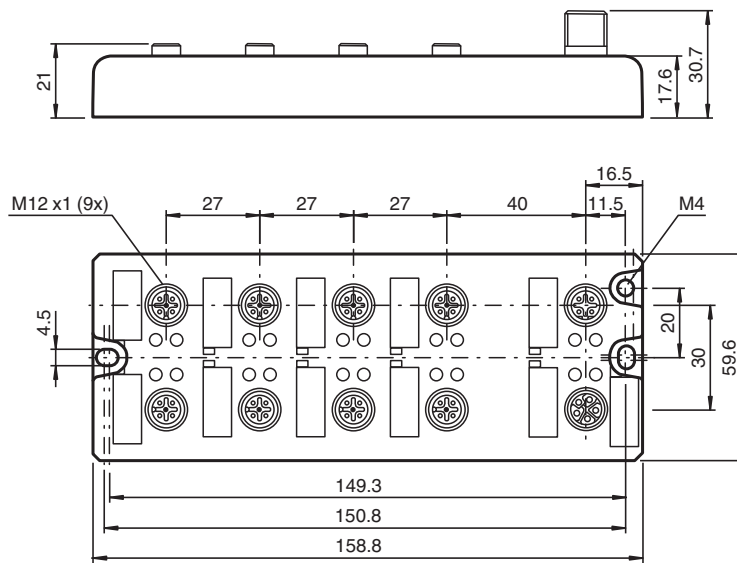

Technical Data

General specifications

UL File Number E223772

Functional safety related parameters

MTTF_d 2111 a

Indicators/operating means

LED U_{AUX} Green: Actuator supply voltage OK
Red: Actuator supply voltage < 18 V

LED IO-Link Green: module is switched on, no communication
Flashing green: communication OK
Red: signal line overload

LED A Orange: status indicator channel A
Red: peripheral error

Release date: 2020-07-07 Date of issue: 2020-07-07 Filename: 70101647_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

pepperl+fuchs

Technical Data

LED B		White: status indicator channel B Red: peripheral error
LED U _S		Green: system/sensor supply voltage OK Red: system/sensor supply voltage < 18 V Flashing red: sensor supply voltage overload
Electrical specifications		
Rated operating voltage	U _e	18 ... 30 V
Nominal voltage		24 V DC
Nominal current		16 A
Current consumption		typ. 80 mA
Current loading capacity		max. 16 A per module (for UL applications, max. 9 A)
Interface		
Interface type		IO-Link
IO-Link Revision		1.1
Device profile		Identification and Diagnosis
Device ID		0x0F0203 (983555)
Transfer rate		COM 3 (230.4 kBaud)
Min. cycle time		2 ms
Process data width		Input 4 Byte Output 4 Byte
SIO mode support		no
Compatible master port type		A
Inputs/Outputs		
Number/Type		16 digital inputs/outputs, configurable Inputs: 2-, 3-, 4-wire PNP, DC, supply from U _S Outputs: 2-wire PNP, DC, supply from U _L No galvanic isolation between U _S and U _L short-circuit protected
Sensor supply		max. 500 mA Per port (X1 - X8)
Output rated operating current	I _e	max. 2 A per channel (X1 - X8) / 4 A Per port max. 9 A per module
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61000-6-2:2005, EN 61000-6-4:2007+A1:2011
Standard conformity		
Degree of protection		EN 60529:2000
Fieldbus standard		Type 1 according to IEC 61131-2
Emitted interference		EN 61000-6-2:2005
Noise immunity		EN 61000-6-4:2007+A1:2011
Shock resistance		EN 61131-2:2004
Ambient conditions		
Ambient temperature		-20 ... 70 °C (-4 ... 158 °F)
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Relative humidity		max. 95 %
Altitude		0 ... 2000 m
Shock and impact resistance		50 g, 11 ms, all axes
Vibration resistance		15 g / 5 ... 500 Hz
Pollution degree		3
Mechanical specifications		
Degree of protection		IP65/IP67/IP69K
Connection		Power Supply M12, L-coded IO-Link M12, A-coded Inputs/Outputs M12, A-coded
Material		
Contacts		CuSn, gold-plated CuNi, gold-plated
Housing		Diecast zinc

Release date: 2020-07-07 Date of issue: 2020-07-07 Filename: 70101647_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Plastic parts	PA
Seal	FKM
Mass	400 g
Construction type	Field housing

Connection

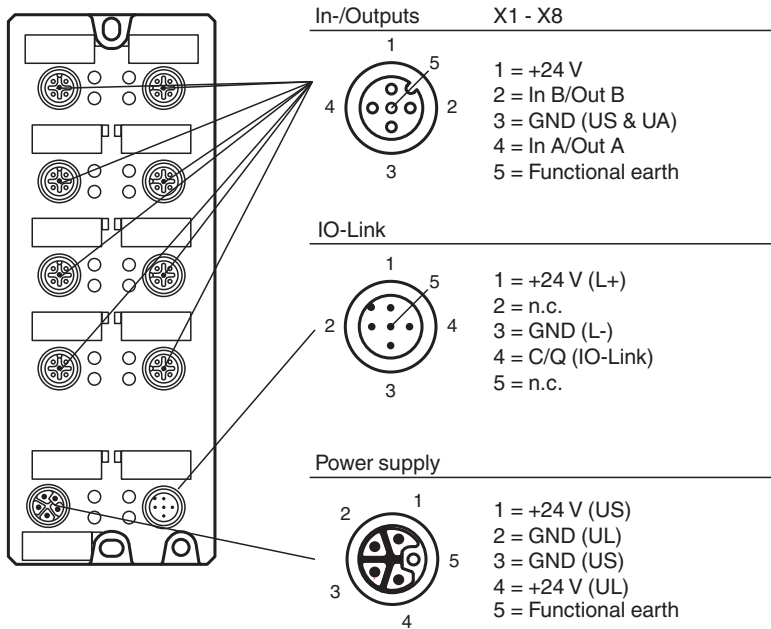

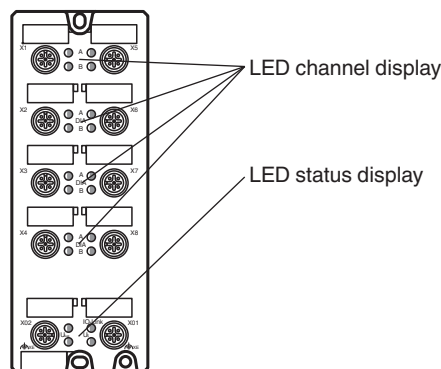

Assembly



Release date: 2020-07-07 Date of issue: 2020-07-07 Filename: 70101647_eng.pdf

Accessories

	MH V1-SCREWDRIVER	torque screwdriver (0.6 Nm)
	MH V1-BIT M12	plug-in cap M12

Release date: 2020-07-07 Date of issue: 2020-07-07 Filename: 70101647_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com