


NONHAZARDOUS LOCATION  
 or  
 HAZARDOUS (CLASSIFIED) LOCATION  
 CLASS I, DIVISION 1, GROUPS A,B,C,D  
 CLASS II, DIVISION 1, GROUPS E,F,G  
 CLASS III, DIVISION 1  
 or  
 CLASS I, ZONE 0 AND 1, IIC

NONHAZARDOUS LOCATION or  
 CLASS I, DIVISION 2, GROUPS A,B,C,D or  
 CLASS I, ZONE 2 GROUP IIC

Any Simple Apparatus (3) or approved device with Entity Concept (1) parameters ( $V_{max}$ ,  $I_{max}$ ,  $C_i$ ,  $L_i$ ) appropriate for connection to Associated Apparatus with Entity Concept parameters listed in Table 1.

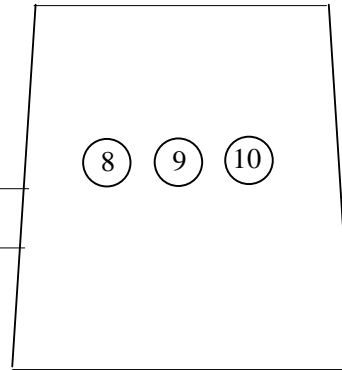

Notes:

- The Entity Concept allows interconnection of intrinsically safe apparatus with associated apparatus not specifically examined in combination as a system when the approved values of  $V_{oc}$  (or  $U_o$ ),  $I_{sc}$  (or  $I_o$ ) and  $P_o$  for the associated apparatus are less than or equal to  $V_{max}$  ( $U_i$ ) and  $I_{max}$  ( $I_i$ ) for the intrinsically safe apparatus and the approved values of  $C_a$  ( $C_o$ ) and  $L_a$  ( $L_o$ ) for the associated apparatus are greater than  $C_i + C_{cable}$  and  $L_i + L_{cable}$ , respectively, for the intrinsically safe apparatus.

The parameters in Table 1 apply when one of the two conditions below is given:

- The total  $L_i$  of the external circuit (excluding the cable) is  $< 1\%$  of the  $L_o$  value or
- The total  $C_i$  of the external circuit (excluding the cable) is  $< 1\%$  of the  $C_o$  value.

The parameters in Table 1 are reduced to 50% when both of the two conditions below are given:


- The total  $L_i$  of the external circuit (excluding the cable)  $> 1\%$  of the  $L_o$  and
- The total  $C_i$  of the external circuit (excluding the cable)  $> 1\%$  of the  $C_o$ .

Note: the reduced capacitance of the external circuit (including cable) shall not be greater than 1 $\mu$ F for C, D (IIB) and 600nF for A, B (IIC).

- Capacitance and inductance of the field wiring from the intrinsically safe equipment to the associated apparatus shall be calculated and must be included in the system calculations as shown in Note 1. Cable capacitance,  $C_{cable}$ , plus intrinsically safe equipment capacitance,  $C_i$  must be less than the marked capacitance,  $C_a$  (or  $C_o$ ), shown on any associated apparatus used. The same applies for inductance ( $L_{cable}$ ,  $L_i$  and  $L_a$  or  $L_o$ , respectively). Where the cable capacitance and inductance per foot are not known, the following values shall be used:  $C_{cable} = 60$  pF/ft.,  $L_{cable} = 0.2$   $\mu$ H/ft.

Dieses Dokument enthält sicherheitsrelevante Angaben. Es darf nicht ohne Absprache mit dem Normenfachmann geändert werden!				
This document contains safety-relevant information. It must not be altered without the authorization of the norm expert!				
CONFIDENTIAL according ISO 16016	Only valid as long as released in EDM or with a valid production documentation!	scale: ---	date:2010-Nov-10	
<b>PEPPERL+FUCHS</b>	Control Drawing HiC2095	change notice	116-0350	
		respons.		GB.PAW
		approved		GB.TC
Oldham		norm	GB.PT	
		sheet 1 of 3		

3. Simple Apparatus: An electrical component or combination of components of simple construction with well defined electrical parameters that does not generate more than 1.5 volts, 100 milliamps, and 25 milliwatts, or a passive component that does not dissipate more than 1.3 watts and is compatible with the intrinsic safety of the circuit in which it is used (USA). A switch non-inductive resistive device or thermocouple (Canada).
4. Wiring methods must be in accordance with the electrical code of the country in use.  
Select field wiring with an insulation temperature rating that is suitable for the application.  
Modules with multiple intrinsically safe field wiring pairs shall be installed as separate intrinsically safe circuits.
5. Power, inputs and outputs must be in accordance with Class I, Division 2 wiring methods of National Electrical Code ANSI/NFPA 70, Canadian Electrical Code C22.1 or in accordance with the authority having jurisdiction.
6. Intrinsically safe circuits must be wired and separated in accordance with Article 504.20 or other local codes, as applicable.
7. Barriers shall not be connected to any device which uses or generates internally any voltage in excess of 250V Rms or DC unless the device has been determined to adequately isolate the voltage from the barrier.
8. The barriers are rated 'Nonincendive'. If the barriers are intended to be mounted in a Division 2 location, they must be mounted in an enclosure with a minimum ingress protection of IP2X. If the barriers are intended to be mounted in a Zone 2 location that is subject to contamination by water or dust, they must be mounted in an enclosure with a minimum ingress protection of IP54. If the barriers are intended to be mounted in a Zone 2 indoor location that is not subject to contamination by water or dust, they must be mounted in an enclosure with a minimum ingress protection of IP4X. The enclosure must be able to accept Division 2 / Zone 2 wiring methods. A temperature rating of T4 applies to all nonincendive rated barriers.
9. In Class I, Division 2 installations, the subject equipment shall be mounted within a tool-secured enclosure which is capable of accepting one or more of the Class I, Division 2 wiring methods specified in the National Electrical Code (ANSI/NFPA 70) or Canadian Electrical Code (C22.1), as applicable.
10. In Class I, Zone 2 installations, the subject equipment shall be mounted within a tool-secured enclosure which is capable of accepting one or more of the Class I, Zone 2 wiring methods specified in the National Electrical Code (ANSI/NFPA 70) or Canadian Electrical Code (C22.1), as applicable. The equipment shall be installed in an enclosure with a minimum ingress protection rating of IP54 unless the apparatus is intended to be afforded an equivalent degree of protection by location
11. Connection of barriers to ground is not required.
12. **WARNING:** Substitution of components may impair intrinsic safety.  
**AVERTISSEMENT:** La substitution de composants peut compromettre la sécurité intrinsèque.  
For Zone 2 installations, ensure protection of supply terminals against transient voltages exceeding 140% of the rated supply voltage.

Dieses Dokument enthält sicherheitsrelevante Angaben. Es darf nicht ohne Absprache mit dem Normenfachmann geändert werden!			
This document contains safety-relevant information. It must not be altered without the authorization of the norm expert!			
CONFIDENTIAL according ISO 16016	Only valid as long as released in EDM or with a valid production documentation!	scale: ---	date:2010-Nov-10
	Control Drawing	change notice	respons. GB.PAW
	HiC2095		approved GB.TC
			norm GB.PT
Oldham			116-0350 sheet 2 of 3

**Table 1 - Entity Parameters**

Model Number	Terminals	Voc (Uo) [V]	Isc (Io) [mA]	Po [mW]	Groups Ca (Co) [uF]			Groups La (Lo) [mH]			Groups Lo/Ro [uH/Ohm]		
					A,B (IIC)	C,E (IIB)	D,F,G (IIA)	A,B (IIC)	C,E (IIB)	D,F,G (IIA)	A,B (IIC)	C,E (IIB)	D,F,G (IIA)
HiC2095	5a,1b,7a,5b,1a,7b	26.4	93	583	0.096	0.74	2.48	4.11	16.44	32.88	54	216	433
	1a,7b,5b wrt 5a	25.2	93	583	0.096	0.74	2.48	4.11	16.44	32.88	54	216	433

Dieses Dokument enthält sicherheitsrelevante Angaben. Es darf nicht ohne Absprache mit dem Normenfachmann geändert werden!

This document contains safety-relevant information. It must not be altered without the authorization of the norm expert!

CONFIDENTIAL according ISO 16016

Only valid as long as released in EDM or with a valid production documentation!

scale: ---

date:2010-Nov-10



Control Drawing

change notice

respons. GB.PAW

approved GB.TC

116-0350

Oldham

HiC2095

norm GB.PT

sheet 3 of 3