

1 EU - TYPE EXAMINATION CERTIFICATE

2 **Safety Device, Controlling Device or Regulating Device intended for use outside a potentially explosive atmosphere but required for or contributing to the safe functioning of Equipment and Protective Systems with respect to the risks of explosion**
Directive 2014/34/EU

3 EU - Type Examination Certificate **BAS00ATEX7171 – Issue 5**
Number:

3.1 In accordance with Article 41 of Directive 2014/34/EU, EC-Type Examination Certificates referring to 94/9/EC that were in existence prior to the date of application of 2014/34/EU (20 April 2016) may be referenced as if they were issued in accordance with Directive 2014/34/EU. Supplementary Certificates to such EC-Type Examination Certificates, and new issues of such certificates, may continue to bear the original certificate number issued prior to 20 April 2016.

4 Product: **Transformer Isolated Potentiometer Amplifier Type KFD2-PT2-Ex1....**

5 Manufacturer: **Pepperl + Fuchs GmbH**

6 Address: **Lilienthalstrasse 200, 68307 Mannheim, Germany**

7 This re-issued certificate extends EC Type Examination Certificate No. BAS01ATEX7171 to apply to product designed and constructed in accordance with the specification set out in the Schedule of the said certificate but having any variations specified in the Schedule attached to this certificate and the documents therein referred to.

8 The original certificate was issued by The Electrical Equipment Certification Service, Notified Body Number 0600, which retains responsibility for its original documentation. SGS Baseefa, Notified Body Number 1180, in accordance with Article 17 of Directive 2014/34/EU of the European Parliament and of the Council, dated 26 February 2014, is responsible only for the additional work relating to this re-issued certificate and any other supplementary certificate it has issued.

The examination and test results are recorded in confidential Report No. **See Certificate History**

9 Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

EN 60079-0:2012+A11:2013 EN 60079-11:2012

except in respect of those requirements listed at item 18 of the Schedule.

10 If the sign “X” is placed after the certificate number, it indicates that the product is subject to the Specific Conditions of Use specified in the schedule to this certificate.

11 This EU - TYPE EXAMINATION CERTIFICATE relates only to the design and construction of the specified product. Further requirements of the Directive apply to the manufacturing process and supply of this product. These are not covered by this certificate.

12 The marking of the product shall include the following :

⊕ II (1) G [Ex ia Ga] IIC (-20°C ≤ Ta ≤ +60°C)

⊕ II (1) D [Ex ia Da] IIIC (-20°C ≤ Ta ≤ +60°C)

⊕ I (M1) [Ex ia Ma] I (-20°C ≤ Ta ≤ +60°C)

SGS Baseefa Customer Reference No. **0808**

Project File No. **17/0678**

This document is issued by the Company subject to its General Conditions for Certification Services accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and the Supplementary Terms and Conditions accessible at <http://www.sgs.com/SGSBaseefa/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. It does not necessarily indicate that the equipment may be used in particular industries or circumstances. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, schedule included, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Baseefa Limited


Rockhead Business Park, Staden Lane,
Buxton, Derbyshire SK17 9RZ

Telephone +44 (0) 1298 766600 Fax +44 (0) 1298 766601

e-mail baseefa@sgs.com web site www.sgs.co.uk/sgsbaseefa

Registered in England No. 4305578.

Registered address: Rossmore Business Park, Ellesmere Port, Cheshire, CH65 3EN

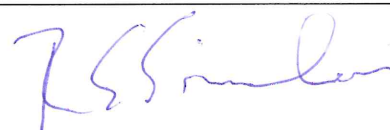

R S SINCLAIR
TECHNICAL MANAGER
On behalf of SGS Baseefa Limited

13

Schedule

14

Certificate Number BAS01ATEX7171 – Issue 5

15 Description of Product

The Transformer Isolated Potentiometer Amplifier Type KFD2-PT2-Ex1... is designed to enable the signal from a potentiometer located in the hazardous area to be monitored while limiting the voltage and current to intrinsically safe levels.

The equipment comprises a number of electronic components, including transformers, fuses, resistors and zener diodes, all mounted on a single printed circuit board and housed within a plastic enclosure fitted with terminals for external connections.

This certificate covers the following isolators:

	Type	Operational Output
KFD2-PT2-Ex1	KFD2-PT2-Ex1-Y98312	0-10V
KFD2-PT2-Ex1-1	KFD2-PT2-Ex1-1-Y107265	0-5V
KFD2-PT2-Ex1-2	KFD2-PT2-Ex1-2-Y107266	2-10V
KFD2-PT2-Ex1-3	KFD2-PT2-Ex1-3-Y107267	1-5V
KFD2-PT2-Ex1-4	KFD2-PT2-Ex1-4-Y107268	0-20mA
KFD2-PT2-Ex1-5	KFD2-PT2-Ex1-5-Y107269	4-20mA
	KFD2-PT2-Ex1-6-Y112844	0-24mA

The segregation of the hazardous area circuits meets the requirements for 250V.

Input / Output Parameters

KFD2-PT2-Ex1... variants

Terminals 7, 8, 11 & 12 and Power Rail:

$$U_m = 253V$$

The equipment is designed to operate from a d.c. supply of up to 40V.

Terminals 1 to 5:

$$U_o = 10.4V \quad I_o = 31.4mA \quad P_o = 82mW \quad C_i = 0 \quad L_i = 0$$

The capacitance and either the inductance or the inductance to resistance ratio (L/R) of the hazardous area load for either current or voltage types must not exceed the following values:

GROUP	CAPACITANCE (μF)	INDUCTANCE (mH)	OR	L/R RATIO ($\mu H/ohm$)
IIC	2.52	36.07		170
IIB / IIIC	17.40	132.57		652
IIA	79.00	273.55		1203
I	110.00	473.31		3000

NOTE:

The above parameters apply when one of the two conditions below is given:

- the total L_i of the external circuit (excluding the cable) is $< 1\%$ of the L_o value or
- the total C_i of the external circuit (excluding the cable) is $< 1\%$ of the C_o value.

The above parameters are reduced to 50% when both of the two conditions below are given:

- the total L_i of the external circuit (excluding the cable) $\geq 1\%$ of the L_o value and
- the total C_i of the external circuit (excluding the cable) $\geq 1\%$ of the C_o value.

Note: the reduced capacitance of the external circuit (including cable) shall not be greater than 1µF for Groups I, IIA & IIB / IIIC and 600nF for Group IIC.

KFD2-PT2-Ex1...Y... variants

Terminals 7, 8, 11 & 12 and Power Rail:

$$U_m = 253V$$

The equipment is designed to operate from a d.c. supply of up to 40V.

Terminals 1 to 5:

$$U_o = 10.4V \quad I_o = 46mA \quad P_o = 120mW \quad C_i = 0 \quad L_i = 0$$

The capacitance and either the inductance or the inductance to resistance ratio (L/R) of the hazardous area load for either current or voltage types must not exceed the following values:

GROUP	CAPACITANCE (µF)	INDUCTANCE (mH)	OR	L/R RATIO (µH/ohm)
IIC	2.53	17.23		123
IIB / IIIC	17.40	64.57		456
IIA	79.00	136.24		901
I	110.00	220.54		3000

NOTE:

The above parameters apply when one of the two conditions below is given:

- the total L_i of the external circuit (excluding the cable) is < 1% of the L_o value or
- the total C_i of the external circuit (excluding the cable) is < 1% of the C_o value.

The above parameters are reduced to 50% when both of the two conditions below are given:

- the total L_i of the external circuit (excluding the cable) $\geq 1\%$ of the L_o value and
- the total C_i of the external circuit (excluding the cable) $\geq 1\%$ of the C_o value.

Note: the reduced capacitance of the external circuit (including cable) shall not be greater than 1µF for Groups I, IIA & IIB / IIIC and 600nF for Group IIC.

16 Report Number

See Certificate History

17 Specific Conditions of Use

None

18 Essential Health and Safety Requirements

In addition to the Essential Health and Safety Requirements (EHSRs) covered by the standards listed at item 9, the following are considered relevant to this product:

Clause	Subject	Compliance
1.2.7	LVD type requirements	Manufacturer responsibility
1.2.8	Overloading of equipment (protection relays, etc.)	User/Installer responsibility
1.4.1	External effects	User/Installer responsibility
1.4.2	Aggressive substances, etc.	User/Installer responsibility

19 Drawings and Documents

New drawings submitted for this issue of certificate:

Number	Sheet	Issue	Date	Description
16-0706BS-E	1 of 1	E	2017-Aug-30	Summary
16-0706IE-02A	1 & 2	A	2015-Nov-04	Relevant Components
16-0706IE-04D	1 – 14	D	2016-Mar-30	Mechanical Parts
16-0706IE-06A	1 – 4	A	2015-Nov-12	Transformer




Current drawings which remain unaffected by this issue:

Number	Sheet	Issue	Date	Description
16-0706IE-01	1 of 1	-	2009-Jul-21	Schematic
16-0706IE-03	1 of 1	-	2009-Jul-21	Component Layouts
16-0706UL-05	1 – 6	-	2011-Oct-18	PCB
16-0706IE-07	1 & 2	-	2009-Jul-22	PCB Lacquering
16-0706BS-10C	1 & 2	C	2012-Jan-12	Type Label

These drawings are common to and held with IECEx BAS 10.0060.

20 Certificate History

Certificate No.	Date	Comments
BAS00ATEX7171	4 October 2000	The release of the prime certificate. The associated test and assessment is documented in Test Report 00(C)0743.
BAS00ATEX7171/1	27 April 2001	To permit the addition of the KFD2-PT2-Ex1-6-Y112844 0-24mA type
BAS00ATEX7171/2	12 July 2010	<ul style="list-style-type: none"> - To confirm that the equipment covered by this certificate has been reviewed against the requirements of EN 60079-0:2006, and EN 60079-11:2007 in respect of the differences from EN 50014:1997 + Amds 1 & 2 and EN 50020:1994 and that none of these differences affect this equipment. - The equipment is also considered suitable for Group I applications and has additionally been assessed against the relevant requirements of EN 61241-11:2006 and the following additional marking may be applied: <div style="margin-left: 20px;"> Ex I (M1) [Ex ia] I Ex II (1)D [Ex iaD] </div> <p>Report No. GB/BAS/ExTR10.0125/00. Project File No. 09/0676.</p>

Certificate No.	Date	Comments
BAS00ATEX7171/3	28 June 2012	<p>To permit:</p> <ul style="list-style-type: none"> - Minor changes to the PCB. - To confirm that the equipment covered by this certificate has been reviewed against the requirements of EN 60079-0:2009 and EN 60079-11:2012 in respect of the differences from EN 60079-0:2006 and EN 60079-11:2007 and that none of these differences, with the exception of marking, affect this equipment. The equipment is now marked: <p>  II (1)G [Ex ia Ga] IIC  II (1)D [Ex ia Da] IIIC  I (M1) [Ex ia Ma] I </p> <p>Test Report No. GB/BAS/ExTR12.0163/00. Project File No. 12/0035.</p>
BAS00ATEX7171 Issue 4	28 April 2015	<p>This issue incorporates previously issued primary and supplementary certificates into one certificate, permits changes to the transformer and confirms that the equipment covered by this certificate has been reviewed against the requirements of EN 60079-0:2012+A11:2013 in respect of the differences from EN 60079-0:2006 and that none of these differences affect this equipment.</p> <p>Test Report No. GB/BAS/ExTR15.0020/00 Project File No. 15/0066.</p>
BAS00ATEX7171 Issue 5	23 April 2018	<p>To permit the introduction of alternative components and the use of an alternative housing material.</p> <p>Test Report No. GB/BAS/ExTR18.0108/00 Project File No. 17/0678.</p>
For drawings applicable to each issue, see original of that issue.		