













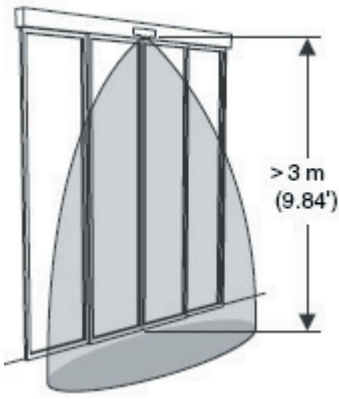











Setting with DIP switches and potentiometer			
	Standard	Sidewalk	Retirement center
			
Sensing range			
DIP switches			
Output hold time (Off delay)	1 s	0.8 s	2 s
Relay contact			
Immunity	2	2	2
Field Variable for Turtle Mode Open	9	9	9
Field Variable for Turtle Mode Close	2	2	2
Range geometry/Radarantenna	narrow	narrow	wide

Settings with Remote Control			
Detection mode	Direction detection forward	Direction detection forward	Without direction detection
Sensing range	10	11	10
Output hold time (Off delay)	1 s	0.8 s	2 s
Relay contact	N.O.	N.O.	N.O.
Turtle mode door open	OFF	OFF	1 s decreasing
Turtle mode door close	OFF	OFF	OFF
Cross-traffic masking	2	4	OFF
Immunity	2	2	2
Field Variable for Turtle Mode Open	9	9	9
Field Variable for Turtle Mode Close	2	2	2
Range geometry/Radarantenna	narrow	narrow	wide

Date of issue: 05/07/2008 TDOCT1520_ENG

Setting with DIP switches and potentiometer			
	Windscreen	Supermarket	High mounting
			
Sensing range			
DIP switches			
Output hold time (Off delay)	0.2 s	1.5 s	1 s
Relay contact			
Immunity	2	2	2
Field Variable for Turtle Mode Open	9	9	9
Field Variable for Turtle Mode Close	2	2	2
Range geometry/ Radarantenna	narrow	wide	wide

Settings with Remote Control			
Detection mode	Direction detection forward	Direction detection forward	Direction detection forward
Sensing range	10	14	14
Output hold time (Off delay)	0.2 s	1.5 s	1 s
Relay contact	N.O.	N.O.	N.O.
Turtle mode door open	OFF	1 s decreasing	OFF
Turtle mode door close	OFF	OFF	OFF
Cross-traffic masking	2	OFF	4
Immunity	2	2	2
Field Variable for Turtle Mode Open	9	9	9
Field Variable for Turtle Mode Close	2	2	2
Range geometry/ Radarantenna	narrow	wide	wide