



The diagram illustrates the correct use of the PC container. It features a temperature scale on the left, ranging from +50°C to -4°F, with a mark for +122°F. A warning label indicates 'HOT' and 'BREAK' with a cracked glass icon. The UL US certification mark is shown on the right. The container is depicted with a lid and a handle.

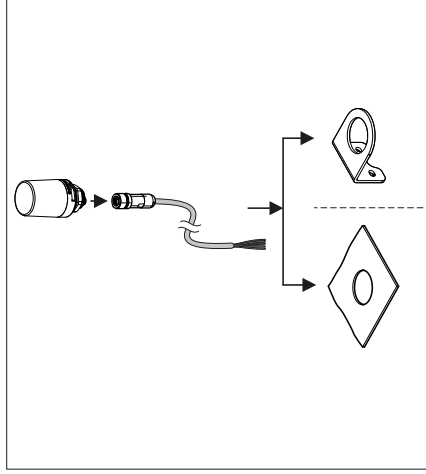


- 
- PEPPERL+FUCHS

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"
© Pepperl+Fuchs · Änderung vorbehalten / DOCT-C0X7 - 2026-5

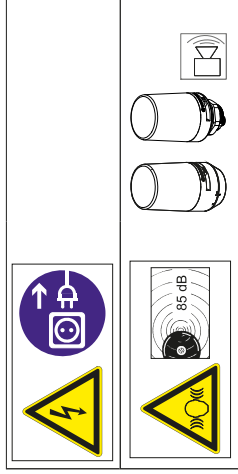

ICA-SB-MCS-55MM1*				Current
Description	Material number	Limited Voltage	18 - 30 V DC	I _s ≤ 55 mA, I ₀ < 350 mA
*-IO-V1	70189432			
*-PM-IOV1	70189585			

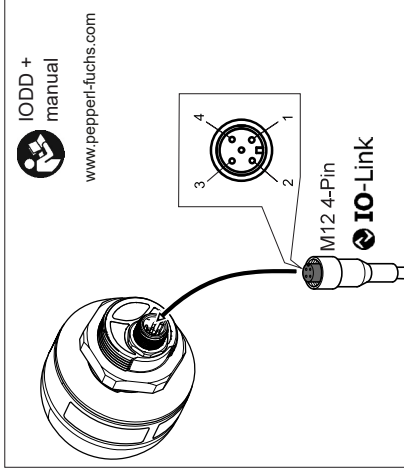

M12 pin	ICA-SB-MCS-55MM1* ③⑩-Link	M12 pin	ICA-SB-MCS-55MM1* ③⑩-Link
1	L+	3	L-
2	+24 V (optional)	4	C/O