

Pepperl+Fuchs GmbH  
Lilienthalstrasse 200  
68307 Mannheim, Germany  
Tel. +49 621 776-0  
Fax +49 621 776-1000

Document No.: DOCT-3829  
Edition: 08/2014

Copyright Pepperl+Fuchs  
www.pepperl-fuchs.com



### Validity

Specific processes and instructions in this document require special precautions to guarantee the safety of the operating personnel.

### Target Group/Personnel

Responsibility for planning, assembly, commissioning, operation, maintenance, and dismounting lies with the system operator.

Mounting, installation, commissioning, operation, maintenance and disassembly of any devices may only be carried out by trained, qualified personnel. The instruction manual must be read and understood.

Laws, standards, or directives applicable to the intended use must be observed. In relation to hazardous areas, Directive 1999/92/EC must be observed.

The corresponding data sheets, declarations of conformity, EC-type-examination certificates, certificates and Control Drawings if applicable (see data sheet) are an integral part of this document. You can find this information under www.pepperl-fuchs.com.

### Mounting/Installation

Use only one conductor per terminal.

- If cable glands are needed for installation, the following points must be considered / evaluated:
- The cable glands used must be suitably certified for the application
- The temperature range of the cable glands must be chosen according to the application.
- The cable glands fitted must not reduce the IP rating.

If you use stranded wires, crimp on wire end ferrules.

In order to guarantee the temperature classes, ensure that power dissipation is lower than the figure stated in the certificate. Most of the power dissipation arises from current flowing in the cables.

In order to minimize power dissipation, observe the maximum possible cable lengths.

Observe the tightening torque of the terminal screws.

Unused conductors must be either connected to terminals or securely tied down and isolated.

If mounting the enclosure on concrete use expanding bolts. If mounting the enclosure to a steel framework use vibration resistant mounting equipment.

The insulation stripping length must be considered.

To ensure the IP degree of protection:

- all seals must be undamaged and correctly fitted
- all screws of the surrounding enclosure and its cover must be tightened with the appropriate torque
- only cable of the appropriate size must be used in the cable glands
- all cable glands must be tightened with the appropriate torque
- all empty cable glands must be sealed with the corresponding plugs

When installing additional components, make sure that these components are listed in the EC-Type-Examination Certificate of the control station.

Select suitable conductors in order to ensure, that the maximum permitted temperature of the conductors fit to the maximum permitted ambient temperature of the control station.

The permitted ambient temperatures of the built-in components must not be exceeded.

The minimum bending radius has to be adhered to.


When installing the conductors the insulation must reach up to the terminal. Connect all bare non-energized metal parts to the protective earth conductor. Observe IEC/EN 60079-17 for maintenance and testing.

Before opening the enclosure make sure, that the built-in components are de-energized.

When energized, the enclosure may only be opened for maintenance, if only intrinsically safe circuits are used inside the enclosure.

If there is a defect, the product must be repaired by Pepperl+Fuchs.

When the internal/external ground bolt is supplied loose, the components should be fitted as shown in the figure below.

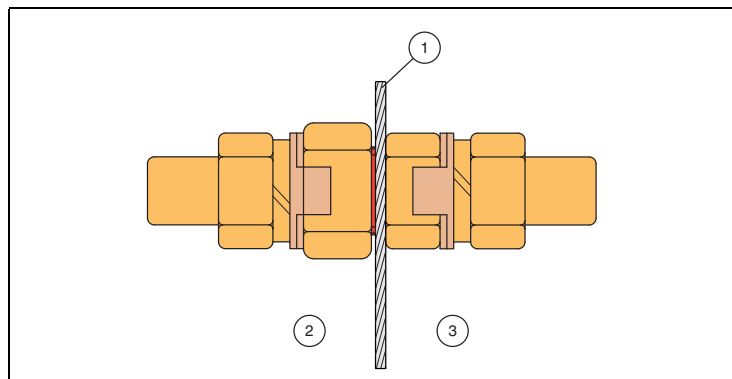

|   |                    |
|---|--------------------|
| 1 | Enclosure wall     |
| 2 | Enclosure exterior |
| 3 | Enclosure interior |

### Technical Specifications

|   |  |            |
|---|--|------------|
| LCS*.*/LCP*.*/  | Refer to type code builder in chapter „Typecodes“        |            |
| Hazardous Area  | SIRA13ATEX3059X  |            |
| ATEX certificate number                                     | IECEX SIR 13.0021  |            |
| CE number   |  |            |
| Certification coding for ATEX/IECEX                         | <br>   |            |
| Certification digit in type code                            | 1  |            |
| Gas/dust temperature class                                  |  |            |
| Maximum ambient temperature                                 | Ta +55°C   | Ta +40°C   |
| Applications with 10°K internal rise                        | T4 / T130°C  | T6 / T80°C |
| Refer to the enclosure certification label for confirmation |  |            |
| Minimum ambient temperature                                 | -35 °C (-40 °C / -50 °C with specific equipment options) |            |
| IP Rating   | IP 66  |            |
| <b>Mechanical</b>   |  |            |
| <b>LCS types</b>  |  |            |
| Material  | Stainless steel models 316L                              |            |
| Finish  | Stainless steel models Electropolished                   |            |
| <b>LCP types</b>  |  |            |
| Material  | Glass reinforced polyester                               |            |
| Finish  | As moulded   |            |
| <b>All types</b>  |  |            |
| Cover screw torque  | 2 Nm   |            |

|                 |  |
|-----------------|--|
| LCS*.*/LCP*.*/  | Refer to type code builder in chapter „Typecodes“  |
| Electrical      | Refer to type code builder in chapter „Typecodes“  |
| Maximum voltage | Dependent on terminals & equipment fitted – see certification label  |
| Maximum current | Dependent on terminals, cable & equipment fitted – see certification label                                     |
| Conformity      | EN 60079-0: 2012<br>EN 60079-7: 2007<br>EN 60079-31: 2009<br>EN 60079-1: 2007<br>EN 60079-11: 2007<br>EN 60529 |

### Dissipation of copper cables in W/m

| Cable CSA           | Current (A) |        |       |       |       |       |
|---------------------|-------------|--------|-------|-------|-------|-------|
|                     | 1           | 2      | 4     | 6     | 10    | 16    |
| 1 mm <sup>2</sup>   | 0.0168      | 0.0672 | 0.269 | 0.605 | 1.68  | 4.3   |
| 2.5 mm <sup>2</sup> | 0.00672     | 0.0269 | 0.108 | 0.242 | 0.672 | 1.72  |
| 4 mm <sup>2</sup>   | 0.0042      | 0.0168 | 0.067 | 0.151 | 0.42  | 1.08  |
| 6 mm <sup>2</sup>   | 0.0028      | 0.0112 | 0.045 | 0.101 | 0.28  | 0.717 |

### Typecodes

| Type code / model number |                 |   |   |       |       |          |
|--------------------------|-----------------|---|---|-------|-------|----------|
| Series                   |                 |   |   |       |       |          |
| LC                       | Control Unit    |   |   |       |       |          |
| :                        | <b>Material</b> |   |   |       |       |          |
| :                        | P               | GRP glass fiber reinforced polyester          |   |       |       |          |
| :                        | S               | stainless steel                               |   |       |       |          |
| :                        | :               | <b>Enclosure type / quantity of operators</b> |   |       |       |          |
| :                        | :               | 1...4   | see dimensions data table                 |       |       |          |
| :                        | :               | :   | <b>Function 1</b>                         |       |       |          |
| :                        | :               | :   | xxxx see operator type codes              |       |       |          |
| :                        | :               | :   | <b>Function 2</b>                         |       |       |          |
| :                        | :               | :   | xxxx see operator type codes              |       |       |          |
| :                        | :               | :   | <b>Function 3</b>                         |       |       |          |
| :                        | :               | :   | xxxx see operator type codes              |       |       |          |
| :                        | :               | :   | <b>Function 4</b>                         |       |       |          |
| :                        | :               | :   | xxxx see operator type codes              |       |       |          |
| :                        | :               | :   | <b>Entry configuration / cable glands</b> |       |       |          |
| :                        | :               | :   | x   |       |       |          |
| LC                       |                 |   |   |       |       |          |
| LC                       | P               | n   | .xxxx                                     | .xxxx | .xxxx | .xxxx .x |
| LC                       | S               | n   | .xxxx                                     | .xxxx | .xxxx | .xxxx .x |

Fig. 1 Type code of operating elements see series data sheets LCS\*.\*/LCP\*.\*/.

**Typecodes**

(F)XL\*.CS Typecode:

| Type code / model number |                                    |                       |                                     |                               |                       |  |
|--------------------------|------------------------------------|-----------------------|-------------------------------------|-------------------------------|-----------------------|--|
| <b>Enclosure type</b>    |                                    |                       |                                     |                               |                       |  |
| FXL                      | metal enclosure with return flange |                       |                                     |                               |                       |  |
| XL                       | metal enclosure                    |                       |                                     |                               |                       |  |
| :                        | <b>Material</b>                    |                       |                                     |                               |                       |  |
| :                        | M                                  | mild steel            |                                     |                               |                       |  |
| :                        | S                                  | stainless steel       |                                     |                               |                       |  |
| :                        | :                                  | <b>Enclosure size</b> |                                     |                               |                       |  |
| :                        | :                                  | nn                    | enclosure size from standard range  |                               |                       |  |
| :                        | :                                  | :                     | <b>Type of explosion protection</b> |                               |                       |  |
| :                        | :                                  | :                     | 1                                   | Ex de, Ex tb                  |                       |  |
| :                        | :                                  | :                     | 3                                   | Ex ib, Ex tb                  |                       |  |
| :                        | :                                  | :                     | 5                                   | Ex de ib, Ex tb               |                       |  |
| :                        | :                                  | :                     | :                                   | <b>Gland plate at face(s)</b> |                       |  |
| :                        | :                                  | :                     | 0                                   | none                          |                       |  |
| :                        | :                                  | :                     | 1                                   | face B                        |                       |  |
| :                        | :                                  | :                     | 2                                   | faces A, B                    |                       |  |
| :                        | :                                  | :                     | 3                                   | faces B, C, D                 |                       |  |
| :                        | :                                  | :                     | 4                                   | faces A, B, C, D              |                       |  |
| :                        | :                                  | :                     | :                                   | <b>Enclosure depth</b>        |                       |  |
| :                        | :                                  | :                     | :                                   | standard depth                |                       |  |
| :                        | :                                  | :                     | D                                   | increased depth               |                       |  |
| :                        | :                                  | :                     | :                                   | <b>Type of solution</b>       |                       |  |
| :                        | :                                  | :                     | :                                   | CS                            | control station       |  |
| :                        | :                                  | :                     | :                                   | :                             | <b>Optional digit</b> |  |
| :                        | :                                  | :                     | :                                   | n                             | counter               |  |
| :                        | :                                  | :                     | :                                   | :                             | <b>Item number</b>    |  |
| :                        | :                                  | :                     | :                                   | :                             | Yxxxxxx               |  |
|                          |                                    |                       |                                     | .CS                           | -Yxxxxxx              |  |

GL\*.CS Typecode:

| Type code / model number |                                      |    |                                    |                                     |                         |                       |
|--------------------------|--------------------------------------|----|------------------------------------|-------------------------------------|-------------------------|-----------------------|
| <b>Enclosure type</b>    |                                      |    |                                    |                                     |                         |                       |
| GL                       | glass fiber reinforced polyester GRP |    |                                    |                                     |                         |                       |
| :                        | <b>Enclosure size</b>                |    |                                    |                                     |                         |                       |
| :                        | :                                    | nn | enclosure size from standard range |                                     |                         |                       |
| :                        | :                                    | :  | <b>Earth continuity plate</b>      |                                     |                         |                       |
| :                        | :                                    | :  | 0                                  | none                                |                         |                       |
| :                        | :                                    | :  | 1                                  | galvanized steel                    |                         |                       |
| :                        | :                                    | :  | 2                                  | brass                               |                         |                       |
| :                        | :                                    | :  | 3                                  | stainless steel                     |                         |                       |
| :                        | :                                    | :  | :                                  | <b>Type of explosion protection</b> |                         |                       |
| :                        | :                                    | :  | :                                  | 1                                   | Ex de, Ex tb            |                       |
| :                        | :                                    | :  | :                                  | 3                                   | Ex ib, Ex tb            |                       |
| :                        | :                                    | :  | :                                  | 5                                   | Ex de ib, Ex tb         |                       |
| :                        | :                                    | :  | :                                  | <b>Enclosure depth</b>              |                         |                       |
| :                        | :                                    | :  | :                                  | standard depth                      |                         |                       |
| :                        | :                                    | :  | :                                  | D                                   | increased depth         |                       |
| :                        | :                                    | :  | :                                  | :                                   | <b>Type of solution</b> |                       |
| :                        | :                                    | :  | :                                  | :                                   | CS                      | control station       |
| :                        | :                                    | :  | :                                  | :                                   | :                       | <b>Optional digit</b> |
| :                        | :                                    | :  | :                                  | :                                   | n                       | counter               |
| :                        | :                                    | :  | :                                  | :                                   | :                       | <b>Item number</b>    |
| :                        | :                                    | :  | :                                  | :                                   | :                       | Yxxxxxx               |
| GL                       |                                      |    |                                    |                                     | .CS                     | -Yxxxxxx              |