



- 4-channel
- 24 V DC supply voltage
- Lead breakage (LB) monitoring and short-circuit (SC) monitoring
- Power Rail bus
- EMC acc. to NAMUR NE 21
- Will be discontinued


Function

The KSD2-BI-4.2 transmits digital input signals via the Power Rail bus. Proximity sensors in accordance with EN 60947-5-6 (NAMUR) or mechanical contacts may be used as alarms. The inputs have a common positive reference and are galvanically isolated from output and power supply in accordance to EN 50178.

Application

The transfer of digital input signals of proximity sensors or dry contacts to the PLC or the DCS.

Connection

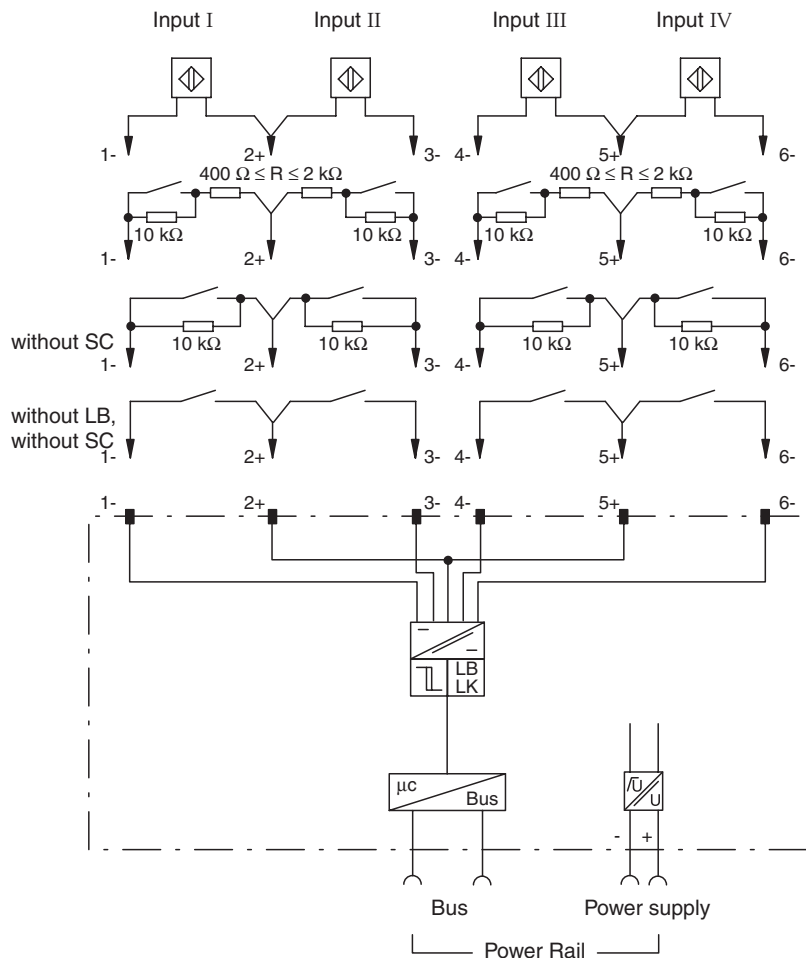

Composition

Front View

Housing type A3
(see system description)

LED yellow/red:
Input check channel III

LED yellow/red:
Input check channel I


LED yellow/red:
Input check channel II

Removable terminals
green

LED green:
Power supply

LED red:
Fault signal

LED yellow/red:
Input check channel IV

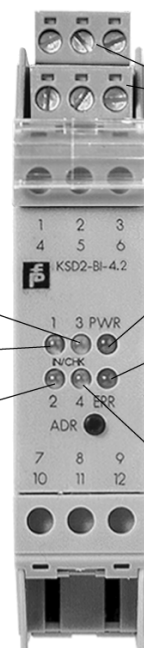

Supply	
Connection	Power Rail
Rated voltage	20 ... 30 V DC
Ripple	< 10 %
Power loss	0.8 W , increase up to 1.0 W in the case of short-circuit on all channels
Power consumption	1 W
Input	
Connection	terminals 1-, 2+, 3-; 4-, 5+, 6-
Rated values	acc. to EN 60947-5-6 (NAMUR)
Pulse/Pause ratio	≥ 20 ms / ≥ 20 ms
Switching point/Switching hysteresis	1.2 ... 2.1 mA / approx. 0.2 mA
Lead monitoring	breakage I < 0.1 mA , short-circuit I > 6 mA
Output	
Connection	Power Rail
Interface	CAN protocol via Power Rail bus
Transfer characteristics	
Switching frequency	≤ 10 Hz
Electrical isolation	
Input/power supply, internal bus	basic insulation acc. to EN 50178, rated insulation voltage 300 V _{eff}
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EC	EN 61326
Standard conformity	
Insulation coordination	EN 50178
Electrical isolation	EN 50178
Electromagnetic compatibility	NE 21
Protection degree	IEC 60529
Climatic conditions	IEC 60721
Ambient conditions	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Damaging gas	acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	
Protection degree	IP20
Connection	terminal connection ≤ 2.5 mm ²
Mass	approx. 100 g
Dimensions	20 x 100 x 115 mm (0.8 x 3.9 x 4.5 in)
Mounting	DIN rail mounting

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity and instructions have to be observed. For information see www.pepperl-fuchs.com.

Notes

Software functions

Adjustable by the **PACTware™** human machine interface:

- Information on devices may be saved in PC memory
- The following are separately adjustable for each channel:
 - TAG numbers, 28 alphanumeric characters, can be programmed into device
 - Commentary, may be saved in PC memory
 - Input inversion
 - Lead monitoring selectable
 - Separate detection and indication of lead breakage and lead short circuit
 - Malfunction output status
 - downscale
 - upscale
 - maintenance of the last accepted value
 - Simulation
 - of the input value
 - of the device diagnosis
 - of the process channel diagnosis

Release date 2008-03-27 12:02 Date of issue 2008-03-27 054706_ENG.xml