




**Model Number**

PL3-F25-SN4-K

**Features**

- For installation in housing
- PL3... with valve and screen connection
- Pluggable cage clamp terminals
- Usable up to SIL 3 acc. to IEC 61508
- Satisfies machinery directive


**Connection**



**Accessories**

- BT32**  
Activator for F25 series
- BT32XS**  
Activator for F25 series
- BT32XAS**  
Activator for F25 series
- BT33**  
Activator for F25 series
- BT34**  
Activator for F25 series

**Dimensions**

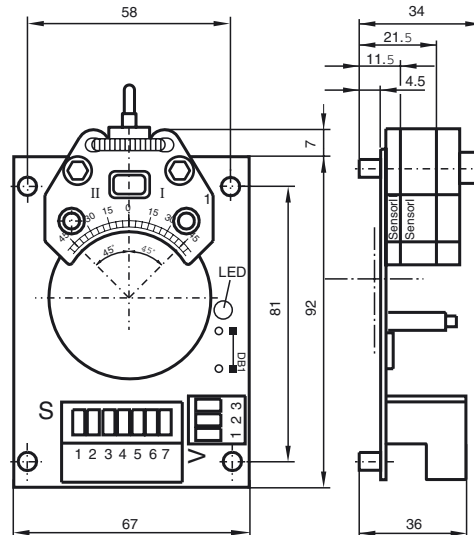

**Technical Data**

**General specifications**

|                              |       |                      |
|------------------------------|-------|----------------------|
| Switching element function   | DC    | Dual NC              |
| Rated operating distance     | $s_n$ | 3 mm                 |
| Installation                 |       | embeddable mountable |
| Output polarity              |       | Safety Function      |
| Assured operating distance   | $s_a$ | 0 ... 2.43 mm        |
| Reduction factor $r_{Al}$    |       | 0.38                 |
| Reduction factor $r_{Cu}$    |       | 0.43                 |
| Reduction factor $r_{303}$   |       | 1                    |
| Reduction factor $r_{St37}$  |       | 1.4                  |
| Reduction factor $r_{Brass}$ |       | 0.58                 |

**Nominal ratings**

|                              |       |   |
|------------------------------|-------|---|
| Nominal voltage              | $U_o$ | 8.2 V ( $R_i$ approx. 1 k $\Omega$ )                |
| Operating voltage            | $U_B$ | 5 ... 25 V  |
| Switching frequency          | f     | 0 ... 1500 Hz                                       |
| Hysteresis                   | H     | typ. 5 %  |
| Reverse polarity protected   |       | yes   |
| Short-circuit protection     |       | no  |
| Suitable for 2:1 technology  |       | yes, Reverse polarity protection diode not required |
| Current consumption          |       |   |
| Measuring plate not detected |       | $\geq$ 3 mA   |
| Measuring plate detected     |       | $\leq$ 1 mA   |
| Valve status indication      |       | LED, yellow<br>can be switched off by of DB1        |

**Ambient conditions**

|                     |                                 |
|---------------------|---------------------------------|
| Ambient temperature | -25 ... 100 °C (-13 ... 212 °F) |
| Storage temperature | -40 ... 100 °C (-40 ... 212 °F) |

**Mechanical specifications**

|                                  |                               |
|----------------------------------|-------------------------------|
| Connection (system side)         | Cage tension spring terminals |
| Core cross-section (system side) | up to 2.5 mm <sup>2</sup>     |
| Connection (valve side)          | Cage tension spring terminals |
| Core cross-section (valve side)  | up to 2.5 mm <sup>2</sup>     |
| Housing material                 | Sensor: PBT                   |
| Sensing face                     | Sensor: PBT                   |

**General information**

|                           |                         |
|---------------------------|-------------------------|
| Use in the hazardous area | see instruction manuals |
| Category                  | 1G; 2G; 3G              |

**Compliance with standards and directives**

|                     |   |
|---------------------|---|
| Standard conformity |   |
| NAMUR               | EN 60947-5-6:2000                       |
| Standards           | EN 60947-5-2:2007<br>IEC 60947-5-2:2007 |

Release date: 2011-07-29 08:34 Date of issue: 2011-07-29 182213\_eng.xml

**ATEX 1G**

Instruction

**Manual electrical apparatus for hazardous areas**

Device category 1G

for use in hazardous areas with gas, vapour and mist  
94/9/EG

Directive conformity

Standard conformity

EN 60079-0:2006, EN 60079-11:2007, EN 60079-26:2007

Ignition protection "Intrinsic safety"

Use is restricted to the following stated conditions

CE symbol

 0102

Ex-identification

 II 1G Ex ia IIC T6

EC-Type Examination Certificate

TÜV 99 ATEX 1479 X

Appropriate type

PL.-F25.-SN4...

Effective internal capacitance  $C_i$ 

≤ 100 nF A cable length of 10 m is considered.  
The value is applicable for the sensor circuit.

Effective internal inductance  $L_i$ 

≤ 150 μH A cable length of 10 m is considered.  
The value is applicable for the sensor circuit.

General

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The EC-Type Examination Certificate has to be observed. The special conditions must be adhered to!

Directive 94/9/EG and hence also EC-Type Examination Certificates apply in general only to the use of electrical apparatus under atmospheric conditions.

The use in ambient temperatures of > 60 °C was tested with regard to hot surfaces by the mentioned certification authority.

If the equipment is not used under atmospheric conditions, a reduction of the permissible minimum ignition energies may have to be taken into consideration.

Highest permissible ambient temperature

The temperature ranges, according to temperature class, are given in the EC-Type Examination Certificate. Note: Use the temperature table for category 1 !!! The 20 % reduction in accordance with EN 1127-1:2007 has already been accounted for in the temperature table for category 1.

Installation, Commissioning

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

The intrinsic safety is only assured in connection with an appropriate related apparatus and according to the proof of intrinsic safety.

The associated apparatus must satisfy the requirements of category ia.

Due to the possible danger of ignition, which can arise due to faults and/or transient currents in the equipotential bonding system, galvanic isolation of the power supply and signal circuit is preferable. Associated apparatus without electrical isolation must only be used if the appropriate requirements of IEC 60079-14 are met.

The jumper, WJ, is detachable and must be completely removed to prevent contact with adjacent components.

Maintenance

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

Only changes specifically described in these operating instructions are allowed.

**Special conditions**

Protection from mechanical danger

When used in the temperature range below -20 °C the sensor should be protected from knocks by the provision of an additional housing.

Electrostatic charging

When used in group IIB/IIC non-permissible electrostatic charges should be avoided on the plastic housing parts..

Lead insertion

The connection cables should either be fixed when laid and mechanically protected or installed in such a way, that a force of 30 N applied in the direction of the cable inlet for one hour, does not lead to any visible displacement of the cable connections, even though the cable sheathing is displaced, see also IEC 60079-11. Depending on the type of installation, a suitable cable in accordance with Type A oder B of IEC 60079-14, must be used.

**ATEX 2G**

Instruction

**Device category 2G**

Directive conformity

Standard conformity

CE symbol

Ex-identification

EC-Type Examination Certificate

Appropriate type

Effective internal capacitance  $C_i$ Effective internal inductance  $L_i$ 

General

Highest permissible ambient temperature

Installation, Commissioning

Maintenance

**Special conditions**

Protection from mechanical danger

Electrostatic charging

Lead insertion

**Manual electrical apparatus for hazardous areas**

for use in hazardous areas with gas, vapour and mist


94/9/EG

EN 60079-0:2006, EN 60079-11:2007

Ignition protection "Intrinsic safety"

Use is restricted to the following stated conditions

 0102

 II 1G Ex ia IIC T6

TÜV 99 ATEX 1479 X

PL.-F25.-SN4...

≤ 100 nF ; a cable length of 10 m is considered. The value is applicable for the sensor circuit.

≤ 150 μH ; a cable length of 10 m is considered. The value is applicable for the sensor circuit.

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The EC-Type Examination Certificate has to be observed. The special conditions must be adhered to! Directive 94/9/EG and hence also EC-Type Examination Certificates apply in general only to the use of electrical apparatus under atmospheric conditions.

The use in ambient temperatures of > 60 °C was tested with regard to hot surfaces by the mentioned certification authority.

If the equipment is not used under atmospheric conditions, a reduction of the permissible minimum ignition energies may have to be taken into consideration.

The temperature ranges, according to temperature class, are given in the EC-Type Examination Certificate.

Laws and/or regulations and standards governing the use or intended usage goal must be observed. The intrinsic safety is only assured in connection with an appropriate related apparatus and according to the proof of intrinsic safety.

The jumper, WJ, is detachable and must be completely removed to prevent contact with adjacent components.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

Only changes specifically described in these operating instructions are allowed.

When used in the temperature range below -20 °C the sensor should be protected from knocks by the provision of an additional housing.

When used in group IIC non-permissible electrostatic charges should be avoided on the plastic housing parts.

The connection cables should either be fixed when laid and mechanically protected or installed in such a way, that a force of 30 N applied in the direction of the cable inlet for one hour, does not lead to any visible displacement of the cable connections, even though the cable sheathing is displaced, see also IEC 60079-11. Depending on the type of installation, a suitable cable in accordance with Type A oder B of IEC 60079-14, must be used.



**ATEX 3G (nA)**

Special conditions

Protection from UV light

Release date: 2011-07-29 08:34 Date of issue: 2011-07-29 182213\_eng.xml

**ATEX 3G (nL)**

Note

This instruction is only valid for products according to EN 60079-15:2003, valid until 31-May-2008

**Instruction****Manual electrical apparatus for hazardous areas****Device category 3G (nL)**

for use in hazardous areas with gas, vapour and mist

Directive conformity

94/9/EG

Standard conformity

EN 60079-15:2003 Ignition protection category "n"

Use is restricted to the following stated conditions

CE symbol



Ex-identification

 II 3G EEx nL IIC T6 X
Effective internal capacitance  $C_i$ 

$\leq 100$  nF ; A cable length of 10 m is considered.

The value is applicable for the sensor circuit.

Effective internal inductance  $L_i$ 

$\leq 150$   $\mu$ H ; A cable length of 10 m is considered.

The value is applicable for the sensor circuit.

General

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The data stated in the data sheet are restricted by this operating instruction! The special conditions must be observed!

Installation, Commissioning

Laws and/or regulations and standards governing the use or intended usage goal must be observed. The sensor must only be operated with energy-limited circuits, which satisfy the requirements of IEC 60079-15. The explosion group depends on the connected, energy-limited power supply circuits.

The maximum values of the connected, energy-limited valve circuits, must be observed. The sensor must be installed in a housing in such a way, that a protection class of at least IP20 is achieved in accordance with IEC 60529. The jumper, WJ, is detachable and must be completely removed to prevent contact with adjacent components.

Maintenance

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

Only changes specifically described in these operating instructions are allowed.

**Special conditions**

Maximum permissible ambient temperature  $T_{Umax}$  at  $U_i = 20$  V

Each sensor circuit can be operated with the stated maximum values and with simultaneous operation of the valve circuits.

for  $P_i=34$  mW,  $I_i=25$  mA, T6

62 °C (143.6 °F)

for  $P_i=34$  mW,  $I_i=25$  mA, T5

77 °C (170.6 °F)

for  $P_i=34$  mW,  $I_i=25$  mA, T4-T1

95 °C (203 °F)

for  $P_i=64$  mW,  $I_i=25$  mA, T6

62 °C (143.6 °F)

for  $P_i=64$  mW,  $I_i=25$  mA, T5

77 °C (170.6 °F)

for  $P_i=64$  mW,  $I_i=25$  mA, T4-T1

95 °C (203 °F)

for  $P_i=169$  mW,  $I_i=52$  mA, T6

51 °C (123.8 °F)

for  $P_i=169$  mW,  $I_i=52$  mA, T5

66 °C (150.8 °F)

for  $P_i=169$  mW,  $I_i=52$  mA, T4-T1

87 °C (188.6 °F)

Maximum values of the valve circuit

$U_j = 32$  V;  $I_j = 240$  mA;  $C_j = 10$  nF;  $L_j = 20$   $\mu$ H

The values are applicable to each valve circuit. A cable length of 10 m is taken into account.

Protection from mechanical danger

The sensor must not be mechanically damaged.

When used in the temperature range below -20 °C the sensor should be protected from knocks by the provision of an additional housing.

Electrostatic charging

Lead insertion

The connecting cable must be protected from tension and torsional loading or installed in such a way, that an applied force of 30 N, acting in the direction of the cable inlet for one hour, does not lead to any visible displacement of the cable connections, even though the cable sheathing is displaced, see also IEC 60079-11.

**ATEX 3G (ic)**

Instruction

**Device category 3G (ic)**

Directive conformity

Standard conformity

CE symbol

Ex-identification

Effective internal capacitance  $C_i$ Effective internal inductance  $L_i$ 

General

Installation, Commissioning

Maintenance

**Special conditions**Maximum permissible ambient temperature  $T_{Umax}$  at  $U_i = 20$  Vfor  $P_i=34$  mW,  $I_i=25$  mA, T6for  $P_i=34$  mW,  $I_i=25$  mA, T5for  $P_i=34$  mW,  $I_i=25$  mA, T4-T1for  $P_i=64$  mW,  $I_i=25$  mA, T6for  $P_i=64$  mW,  $I_i=25$  mA, T5for  $P_i=64$  mW,  $I_i=25$  mA, T4-T1for  $P_i=169$  mW,  $I_i=52$  mA, T6for  $P_i=169$  mW,  $I_i=52$  mA, T5for  $P_i=169$  mW,  $I_i=52$  mA, T4-T1

Maximum values of the valve circuit

Protection from mechanical danger

Electrostatic charging

Lead insertion

**Manual electrical apparatus for hazardous areas**


for use in hazardous areas with gas, vapour and mist

94/9/EG

EN 60079-11:2007 Ignition protection category "ic"

Use is restricted to the following stated conditions

 0102

 II 3G Ex ic IIC T6 X
 $\leq 100$  nF ; A cable length of 10 m is considered.

The value is applicable for the sensor circuit.

 $\leq 150$   $\mu$ H ; A cable length of 10 m is considered.

The value is applicable for the sensor circuit.

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The data stated in the data sheet are restricted by this operating instruction!

The special conditions must be observed!

Directive 94/9/EG is generally applicable only to the use of electrical apparatus operating at atmospheric conditions.

If the equipment is not used under atmospheric conditions, a reduction of the permissible minimum ignition energies may have to be taken into consideration.

Laws and/or regulations and standards governing the use or intended usage goal must be observed. The sensor must only be operated with energy-limited circuits, which satisfy the requirements of IEC 60079-11. The explosion group depends on the connected, energy-limited power supply circuits.

The maximum values of the connected, energy-limited valve circuits, must be observed. The sensor must be installed in a housing in such a way, that a protection class of at least IP20 is achieved in accordance with IEC 60529.

The jumper, WJ, is detachable and must be completely removed to prevent contact with adjacent components.

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

Only changes specifically described in these operating instructions are allowed.

Each sensor circuit can be operated with the stated maximum values and with simultaneous operation of the valve circuits.

62 °C (143.6 °F)

77 °C (170.6 °F)

95 °C (203 °F)

62 °C (143.6 °F)

77 °C (170.6 °F)

95 °C (203 °F)

51 °C (123.8 °F)

66 °C (150.8 °F)

87 °C (188.6 °F)

 $U_i = 32$  V;  $I_i = 240$  mA;  $C_i = 10$  nF;  $L_i = 20$   $\mu$ H

The values are applicable to each valve circuit. A cable length of 10 m is taken into account.

The sensor must not be mechanically damaged.

When used in the temperature range below -20 °C the sensor should be protected from knocks by the provision of an additional housing.

When used in group IIC non-permissible electrostatic charges should be avoided on the plastic housing parts.

The connecting cable must be protected from tension and torsional loading or installed in such a way, that an applied force of 30 N, acting in the direction of the cable inlet for one hour, does not lead to any visible displacement of the cable connections, even though the cable sheathing is displaced, see also IEC 60079-11.