


USB Fieldbus Power Supply

FieldConnex® Fieldbus

USB-FBPS-1.11.45.NI

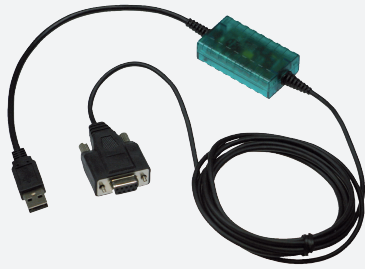

- Output: min. 11 V/45 mA
- For 1...2 devices/test setups
- In conjunction with NI PCMCIA-FBUS card
- Permitted for Zone 2 operation
- For FOUNDATION Fieldbus H1
- Compatible with Windows® XP, Vista, 7, 8, or 10
- USB 1.1/2.0 compatible


USB fieldbus power supply for 1 or 2 field devices with D-sub socket for connecting to National Instruments NI PCMCIA FBUS card



Function

The USB-FBPS-1.11.45.NI fieldbus power supply powers one or two field devices. It connects via D-SUB female connector to the popular NI PCMCIA FBUS card by National Instruments. This small unit is designed to enable commissioning and maintenance personnel to conduct single field device work typical during plant start-up or maintenance: device configuration download, functional test, and device tagging. The power supply provides the infrastructure from the convenience of a laptop or PC, or any other USB-port. This device complements the portfolio of FieldConnex® tools for the fieldbus practitioner on the go. It complements the mobile Diagnostic Module DM-AM for check-out, monitoring, and troubleshooting of single fieldbus segments.

Connection

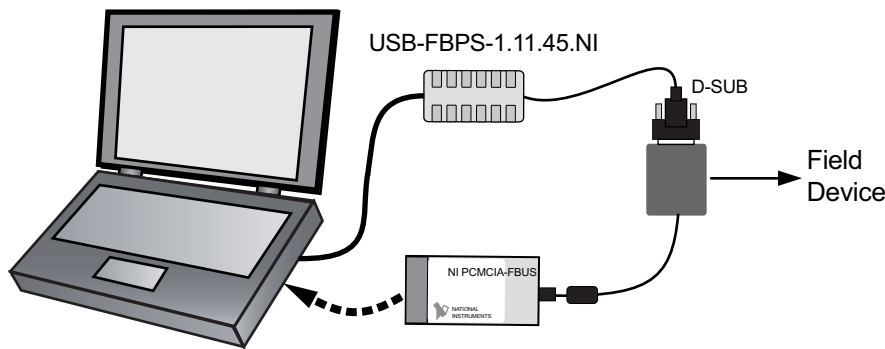

Technical Data

General specifications	
Design / Mounting	Handheld/mobile
Installation in hazardous area	Zone 2
Supply	
Connection	USB-Male Connector Typ A (Standard)
Rated voltage	U_r typ. 5 V
Rated current	I_r max. 350 mA
Power dissipation	typ. 250 mW
Fieldbus connection	

Release date: 2024-12-17 Date of issue: 2024-12-17 Filename: 209588_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Connection	D-Sub socket 9-pin ; pin 6: Bus + , pin 7: Bus -	
Rated voltage	U_N	min. 11 V
Rated current	I_N	45 mA
Short-circuit current		typ. 60 mA
Terminating resistor		50 Ω
Indicators/operating means		
LED ERR		red flashing: short-circuit or undervoltage at output
LED PWR		green: Interface Power ON/OK
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Degree of protection		IEC/EN 60529
Fieldbus standard		IEC 61158-2
Ambient conditions		
Ambient temperature		-10 ... 50 °C (14 ... 122 °F)
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Pollution degree		max. 2, according to IEC 60664
Mechanical specifications		
Connection type		USB-Male Connector Typ A (Standard)
Housing		56 x 32 x 17 mm
Housing material		Polycarbonate
Degree of protection		IP20
Mass		approx. 105 g
Data for application in connection with hazardous areas		
Outputs		
Voltage	U_o	17.5 V
Certificate		PF 08 CERT 1303 X
Marking		Ⓔ II 3G Ex nA II T4
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly



Release date: 2024-12-17 Date of issue: 2024-12-17 Filename: 209588_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com