




Splice sensor

UGB-18GM50-255-2E3-150MM-V15-Y

- Ultrasonic system for splice detection
- Sensor with mounting bracket, preassembled
- Insensitive to printing, colors, and shining surfaces
- Very high processing speeds are possible.



Dimensions

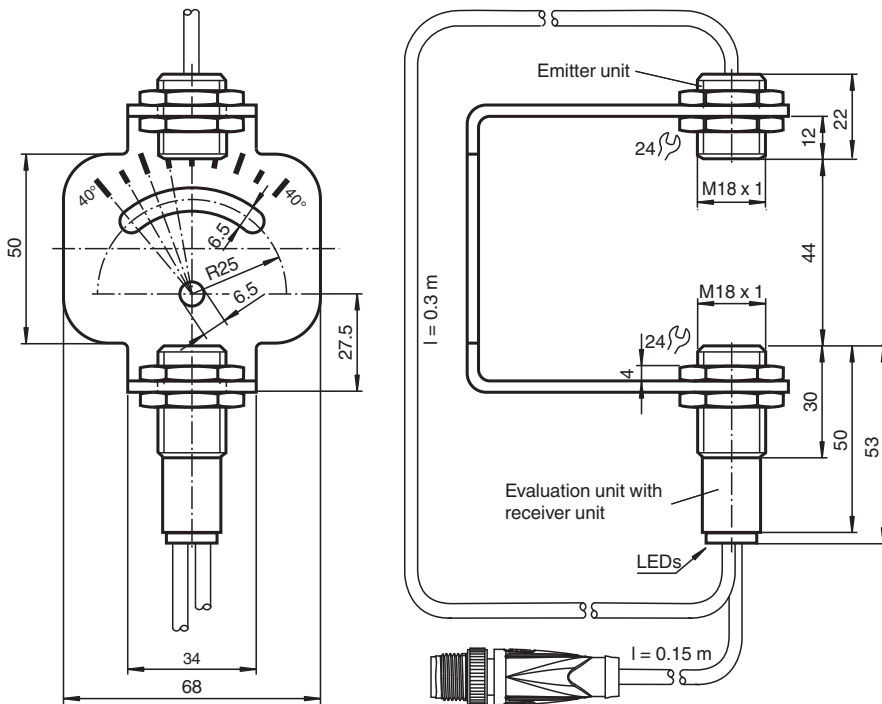

Technical Data

General specifications

Sensing range	20 ... 60 mm , optimal distance: 45 mm
Transducer frequency	255 kHz

Indicators/operating means

LED green	Display: readiness
LED yellow	Display: splice detected
LED red	indication: no sheet detected (Air)

Electrical specifications

Operating voltage	U_B	18 ... 30 V DC , ripple 10 % _{SS}
No-load supply current	I_0	< 60 mA

Release date: 2023-02-13 Date of issue: 2023-02-13 Filename: 219491_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Time delay before availability	t_v	< 500 ms
Input		
Input type		Teach-In input 0-level: $-U_B \dots -U_B + 1V$ 1-level: $+U_B - 1V \dots +U_B$
Pulse length		≥ 500 ms
Impedance		≥ 10 k Ω
Output		
Output type		2 switch outputs PNP, NC
Rated operating current	I_e	2 x 100 mA , short-circuit/overload protected
Voltage drop	U_d	≤ 3 V
Switch-on delay	t_{on}	≤ 600 μ s
Switch-off delay	t_{off}	≤ 600 μ s
Pulse extension		≥ 120 ms programmable
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions		
Ambient temperature		0 ... 60 °C (32 ... 140 °F)
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Connection type		Cable connector M12 x 1 , 5-pin with PVC Cable, 150 mm
Housing diameter		18 mm
Degree of protection		IP67
Material		
Housing		nickel plated brass; plastic components: PBT
Transducer		epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass		150 g

Connection




Characteristic Curve

Mounting/Adjustment


Suggestions:

a = 5 mm ... 15 mm
 b ≥ 10 mm
 d = 40 mm ... 45 mm
 $\beta = 20^\circ \dots 40^\circ$

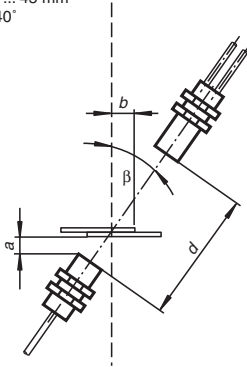


Angular misalignment

$\alpha < \pm 1^\circ$






Sensor offset

s < ± 1 mm



Accessories

	MH-UDB01	Mounting bracket for double sheet monitor
	UVW90-K18	Ultrasonic -deflector
	M18K-VE	Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors

Additional Information

Description of sensor functions

The ultrasonic double sheet monitor for splice detection can be used in all applications, where an automatic detection of glue dots, splices, bondings or the absence of base material is required, to protect machines or to evade waste production. The double-sheet monitor is based on the ultrasonic through-beam principle. The following can be detected:

- No base material, i.e. air,
- glue dots, splices, bondings

A microprocessor system evaluates the signals. The appropriate switch outputs are set as a result of the evaluation. Changes in ambient conditions such as temperature and humidity are compensated for automatically. The interface electronics is integrated into a compact M18 metal housing together with a sensor head.

Electrical connection

The sensor is equipped with with a 5 pin connector. The functionality of the connections is described in the following table. The teach input (pin 5) is used to teach the sensor.

Pin	Switching on	Comments
1	+U _B	
4	Switch output for splices	Pulse width corresponds to the event
2	Switch output for air	Pulse width corresponds to the event
5	-U _B / n.c. / +U _B	Normal operation / output pulse prolongation / TEACH-IN
3	-UB	

Normal mode

The sensor is working in normal mode if the function input (pin 5) is applied to -U_B or not connected.

Displays:

LED yellow: Detection of splices
 LED green: Power on
 LED red: Detection of air (no base material)

Switch outputs:

The switch outputs are only active in normal operation!

pin 4: Splice output
 pin 2: Air output

Output pulse extension

If the teach input (pin 5) is not connected, when switching on the power supply, the sensor operates with output pulse prolongation. Events, shorter than 120 ms cause an output pulse duration of 120 ms at the Splice output. For sensor operation without pulse prolongation, the teach input (pin 5) has to be connected with -U_B while power supply is switched on.

Please note:

This can result in a condition in which more than one switch output is switched through!

TEACH-IN mode

Connecting the teach input (pin 5) with +U_B for at least 500 ms causes the sensor to change into TEACH-IN mode. The TEACH-IN procedure has to be carried out with base material. In case of inhomogeneous base materials we suggest to teach the sensor with activated material feeding and a corresponding prolongation of the TEACH-IN procedure.

During the TEACH-IN procedure flashes the yellow LED; the green LED is off.

After returning to the normal operation mode (teach input (pin 5) detached from +U_B) the sensor indicates whether the TEACH-IN procedure was successful or not.

TEACH-IN procedure successful: green LED flashes 3 times

TEACH-IN procedure not successful: red LED flashes 3 times

Notes:

If two or more double sheet controls are used in the immediate vicinity of each other, there may be mutual interference between them, which can result in improper functionality of the devices. Mutual interference can be prevented by introducing suitable countermeasures when planning systems. Suitable measures can be:

- Mounting of sound absorbers (foam material)
- mounting of sound separators (sheet metal)
- insallation of the sensors with different directions of sound transmission.