

**Features**

- 4 segments, redundant, individual modules per segment
- Supports all PLC and PCS hosts
- High-power trunk: Live work on devices in any hazardous area
- Optimized for size and quality, low heat dissipation
- For FOUNDATION Fieldbus H1
- Optional advanced diagnostics
- Passive impedance for high reliability
- Mountable in any direction
- Installation in Zone 2/Div. 2
- Supports Ex ic voltage limitation


**Function**

The FieldConnex<sup>®</sup> High-Density Power Hub is a modular fieldbus power supply for four segments, fulfilling the needs for all general applications. It supports explosion protection e.g. the High-Power Trunk for longest cable run and highest device count. The Power Hub supports optional Advanced Diagnostics for fast fieldbus commissioning and online monitoring.


The motherboard is the wiring interface with connectors for all DCS and PLC host systems. Sockets for all modules enable simple installation and replacement without tools. For power redundancy with seamless transfer, pairs of modules feed each segment.

Availability and a long service life is achieved through: only one passive impedance filter per segment, optimized design for low power dissipation, high-availability fieldbus termination and plug-in connectors with retaining screws. Any mounting direction allows optimized and space-saving cabinet layout.

**Assembly**

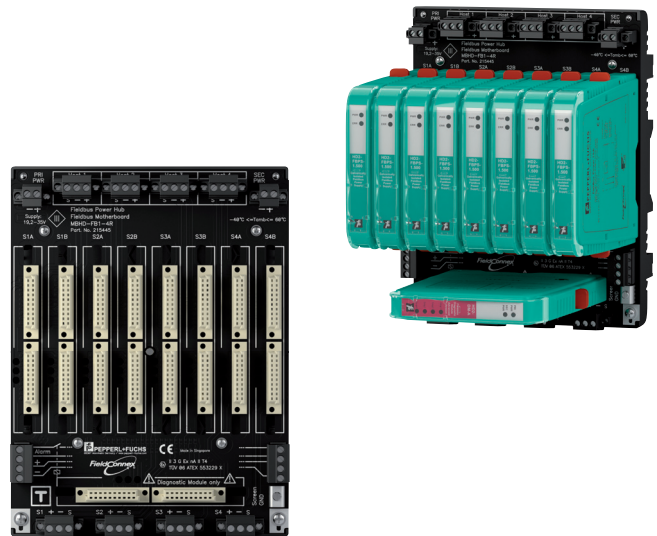

**Connection**

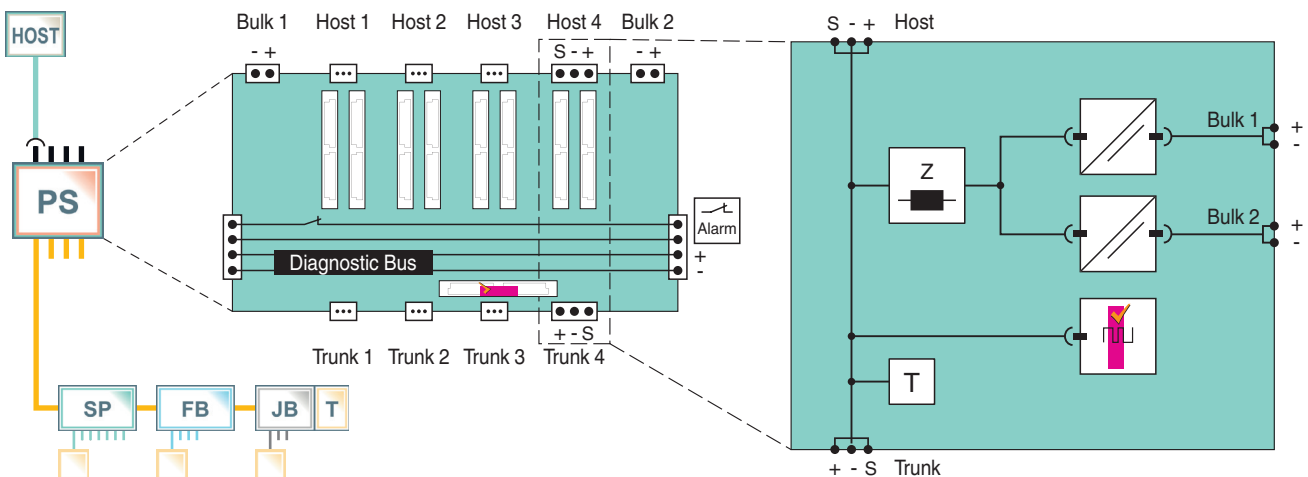

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256491\_eng.xml


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com


Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>Supply</b>		
Connection		redundant
Rated voltage	$U_n$	19.2 ... 35 V SELV/PELV
Rated current	$I_n$	16 A
Power dissipation		typ. 0.39 W per segment
<b>Fieldbus interface</b>		
Number of segments		
Redundant		4
Host-side		redundant general purpose host
Terminating resistor		100 $\Omega$ integrated
<b>Indicators/operating means</b>		
Fault signal		VFC alarm output via connectors
<b>Electrical isolation</b>		
Fieldbus segment/Fieldbus segment		functional insulation acc. to IEC 62103, rated insulation voltage 50 $V_{eff}$
Fieldbus segment/Supply		functional insulation acc. to IEC 62103, rated insulation voltage 250 $V_{eff}$
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
<b>Standard conformity</b>		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529
Fieldbus standard		IEC 61158-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		< 95 % non-condensing
Shock resistance		15 g , 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Pollution degree		max. 2, according to IEC 60664
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>		
Connection type		plug with screw flange
Core cross-section		2.5 mm <sup>2</sup>
Housing material		Polycarbonate
Housing width		150 mm
Housing height		200 mm
Housing depth		65 mm
Degree of protection		IP20
Mass		approx. 740 g
Mounting		DIN mounting rail
<b>Data for application in connection with Ex-areas</b>		
Statement of conformity		TÜV 06 ATEX 553229 X
Group, category, type of protection, temperature class		 II 3 G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>		
FM approval		CoC 3024816, CoC 3024816C
Approved for		Class I, Division 2, Groups A, B, C, D, T4 / Class I, Zone 2, AEx/Ex nA IIC T4
IECEX approval		IECEX TUN 11.0003X
Approved for		Ex nA IIC T4 Gc
<b>Certificates and approvals</b>		
Marine approval		pending
<b>General information</b>		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256491\_eng.xml

Dimensions

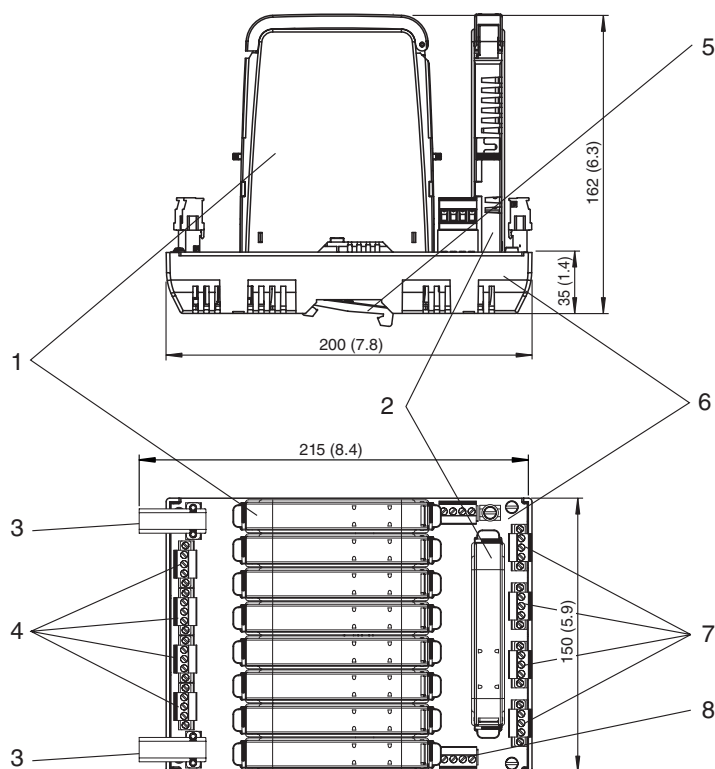

All dimensions in millimeters and inches (values in brackets) and without tolerance indication.

Description:

- 1 Power Supply Modules, see separate data sheet
- 2 Diagnostic Module, see separate data sheets
- 3 Connections for bulk power supply, redundant. With mounted connector covers (optional, see accessories) for Ex ic installations.
- 4 Host connections
- 5 Mounting slot for DIN rail
- 6 Motherboard
- 7 Connections for fieldbus trunk
- 8 Connections for alarm voltage free contact and diagnostic bus  
Diagnostic link cable, optional accessory

Compatible power modules

		HD2-FBPS-1.17.500		HD2-FBPS-1.23.500		HD2-FBPS-1.25.360		HD2-FBPS-1.500	
<b>Power Output</b>									
Voltage (V)		15 ... 17	21 ... 23	25 ... 28	28 ... 30				
Current (mA)		500	500	360	500				
Limit U <sub>0</sub> (V)		17.5	24	-	-				
<b>Device in ...</b>	<b>Type of Protection</b>								<b>Required Installation Components</b>
Zone 0/Div. 1	Intrinsically safe Ex ia			■	■				FieldBarrier
Zone 1/Div. 1	Intrinsically safe Ex ia			■	■				FieldBarrier
Zone 1/Div. 1	Flameproof Ex d			■	■				Segment Protector R-SP-E12 or any Segment Protector installed in Zone 2
Zone 2	Intrinsically safe Ex ic (FISCO)	■							Selected Segment Protectors
Zone 2	Intrinsically safe Ex ic (Entity)		■						Selected Segment Protectors
Div. 2	Non-incendive	■	■	■	■				Any Segment Protector; power module selection depends on voltage of field device
Safe Area	No specific type of protection			■	■				Segment Protector recommended

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256491\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

### Diagnostic module selection

The following diagnostic modules are compatible with this motherboard.

Type code	Description
HD2-DM-B	Diagnostic Module, basic version
HD2-DM-A	Diagnostic Module, advanced version
HD2-DM-A.RO	Diagnostic Module, advanced version, relay output

The stationary and mobile Advanced Diagnostic Module (ADM) and related components provide measurement tools for the fieldbus physical layer. The ADM monitors many quality indicating values of the fieldbus physical layer. An expert system, which is included, analyzes the values and issues easy to understand messages indicating cause and remedy. The ADM is recommended for:

- **Faster commissioning and plant start-up:** Installation issues are known and corrected before loop check commences
- **Reliable operation through online monitoring:** The quality of the physical layer and installation is monitored making fieldbus a manageable asset
- **Efficient troubleshooting:** An expert system guides the user through issues and faults in the fieldbus installation

Many other tools are included that enhance fieldbus installation and upkeep. Please see datasheet on HD2-DM-A.

### Accessories

Type code	Description
ACC-MB-HDC	Diagnostic link cable, length 6 cm
ACC-MB-CC	Set of two connector covers for Ex ic hazardous area applications

### Installation note

see manual