

Features

- 4 segments, redundant, individual modules per segment
- Customized for Yokogawa, ALF 111
- High-power trunk: Live work on devices in any hazardous area
- Optimized for size and quality, low heat dissipation
- For FOUNDATION Fieldbus H1
- Optional advanced diagnostics
- Passive impedance for high reliability
- Mountable in any direction
- Installation in Zone 2/Div. 2
- Supports Ex ic voltage limitation


Function

The FieldConnex[®] High-Density Power Hub is a modular fieldbus power supply for four segments, fulfilling the needs for all general applications. It supports explosion protection e.g. the High-Power Trunk for longest cable run and highest device count. The Power Hub supports optional Advanced Diagnostics for fast fieldbus commissioning and online monitoring.


The motherboard is the wiring interface with connectors for direct DCS hook-up via the AKB 336 system cable. Sockets for all modules enable simple installation and replacement without tools. For power redundancy with seamless transfer, pairs of modules feed each segment.

Availability and a long service life is achieved through: only one passive impedance filter per segment, optimized design for low power dissipation, high-availability fieldbus termination and plug-in connectors with retaining screws. Any mounting direction allows optimized and space-saving cabinet layout.

Assembly

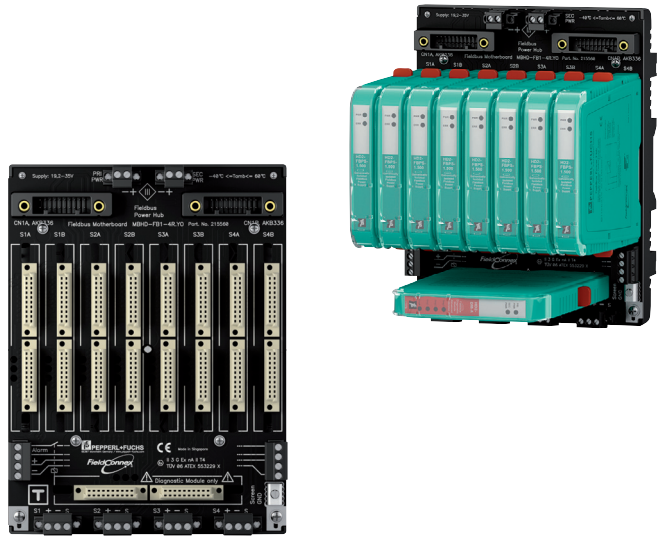


Connection

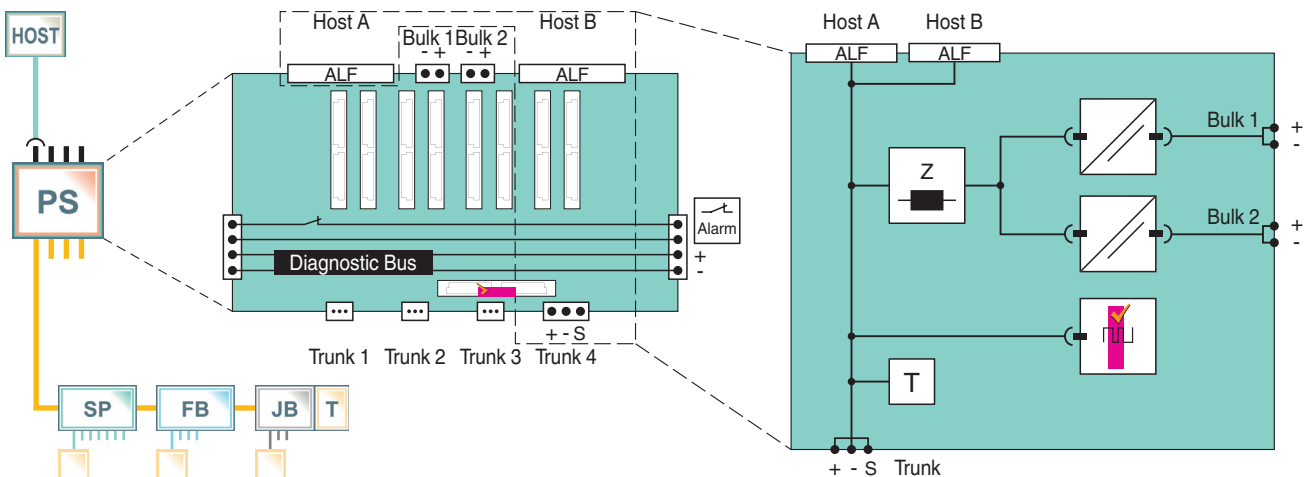


Release date 2016-04-19 15:49 Date of issue 2016-04-20 256492_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Supply		
Connection		redundant
Rated voltage	U_n	19.2 ... 35 V SELV/PELV
Rated current	I_n	16 A
Power dissipation		typ. 0.39 W per segment
Fieldbus interface		
Number of segments		
Redundant		4
Host-side		redundant Yokogawa ALF111 with AKB336 interface cables
Terminating resistor		100 Ω integrated
Indicators/operating means		
Fault signal		VFC alarm output via connectors
Electrical isolation		
Fieldbus segment/Fieldbus segment		functional insulation acc. to IEC 62103, rated insulation voltage 50 V_{eff}
Fieldbus segment/Supply		functional insulation acc. to IEC 62103, rated insulation voltage 250 V_{eff}
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529
Fieldbus standard		IEC 61158-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		< 95 % non-condensing
Shock resistance		15 g , 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Pollution degree		max. 2, according to IEC 60664
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Connection type		plug with screw flange
Core cross-section		2.5 mm ²
Housing material		Polycarbonate
Housing width		150 mm
Housing height		200 mm
Housing depth		65 mm
Degree of protection		IP20
Mass		approx. 700 g
Mounting		DIN mounting rail
Data for application in connection with Ex-areas		
Statement of conformity		TÜV 06 ATEX 553229 X
Group, category, type of protection, temperature class		 II 3 G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		CoC 3024816, CoC 3024816C
Approved for		Class I, Division 2, Groups A, B, C, D, T4 / Class I, Zone 2, AEx/Ex nA IIC T4
IECEX approval		IECEX TUN 11.0003X
Approved for		Ex nA IIC T4 Gc
Certificates and approvals		
Marine approval		pending
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256492_eng.xml

Dimensions

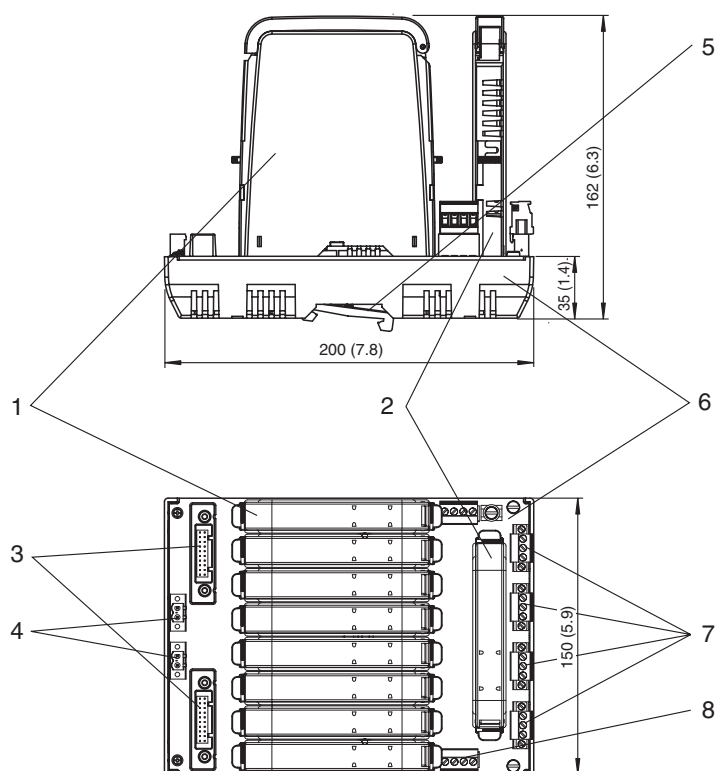

All dimensions in millimeters and inches (values in brackets) and without tolerance indication.

Description:

- 1 Power Supply Modules, see separate data sheet
- 2 Diagnostic Module, see separate data sheets
- 3 Redundant Yokogawa AKB336 system cable socket
- 4 Connections for bulk power supply, redundant
- 5 Mounting slot for DIN rail
- 6 Motherboard
- 7 Connections for fieldbus trunk
- 8 Connections for alarm voltage free contact and diagnostic bus
Diagnostic link cable, optional accessory

Compatible power modules

		HD2-FBPS-1.17.500				
		HD2-FBPS-1.23.500		HD2-FBPS-1.25.360		
				HD2-FBPS-1.500		
Power Output						
Voltage (V)		15 ... 17	21 ... 23	25 ... 28	28 ... 30	
Current (mA)		500	500	360	500	
Limit U ₀ (V)		17.5	24	-	-	
Device in ...	Type of Protection					Required Installation Components
Zone 0/Div. 1	Intrinsically safe Ex ia			■	■	FieldBarrier
Zone 1/Div. 1	Intrinsically safe Ex ia			■	■	FieldBarrier
Zone 1/Div. 1	Flameproof Ex d			■	■	Segment Protector R-SP-E12 or any Segment Protector installed in Zone 2
Zone 2	Intrinsically safe Ex ic (FISCO)	■				Selected Segment Protectors
Zone 2	Intrinsically safe Ex ic (Entity)		■			Selected Segment Protectors
Div. 2	Non-incendive	■	■	■	■	Any Segment Protector; power module selection depends on voltage of field device
Safe Area	No specific type of protection			■	■	Segment Protector recommended

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256492_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Diagnostic module selection

The following diagnostic modules are compatible with this motherboard.

Type code	Description
HD2-DM-B	Diagnostic Module, basic version
HD2-DM-A	Diagnostic Module, advanced version
HD2-DM-A.RO	Diagnostic Module, advanced version, relay output

The stationary and mobile Advanced Diagnostic Module (ADM) and related components provide measurement tools for the fieldbus physical layer. The ADM monitors many quality indicating values of the fieldbus physical layer. An expert system, which is included, analyzes the values and issues easy to understand messages indicating cause and remedy. The ADM is recommended for:

- **Faster commissioning and plant start-up:** Installation issues are known and corrected before loop check commences
- **Reliable operation through online monitoring:** The quality of the physical layer and installation is monitored making fieldbus a manageable asset
- **Efficient troubleshooting:** An expert system guides the user through issues and faults in the fieldbus installation

Many other tools are included that enhance fieldbus installation and upkeep. Please see datasheet on HD2-DM-A.

Accessories

Type code	Description
ACC-MB-HDC	Diagnostic link cable, length 6 cm

Installation note

see manual

Release date 2016-04-19 15:49 Date of issue 2016-04-20 256492_eng.xml