

Thru-beam sensor (pair) M100/MV100-6090/95/103



- Miniature design
- Slit aperture to shape the light in miniature sensors
- Easy to use
- Very bright, highly visible light spot
- Full metal thread mounting
- Highly visible LEDs for Power ON and switching state
- Not sensitive to ambient light

Thru-beam sensor (pair)










Function

The optical sensors of this series are suitable for both standard and demanding applications. The series features a miniature housing design, two M3 metal-threaded mounting holes and a highly visible LED status indicator. Each device is equipped with a sensitivity adjuster and a light-on/dark-on changeover switch for increased flexibility. A wide variety of versions are available in both infrared light and red light with PowerBeam for easy alignment. Special versions with BlueBeam are suitable for challenging applications like those in the solar and battery industries.

Dimensions

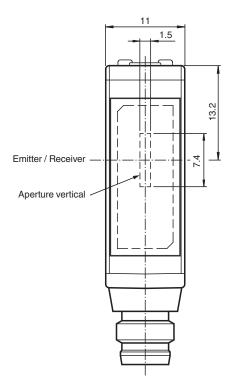

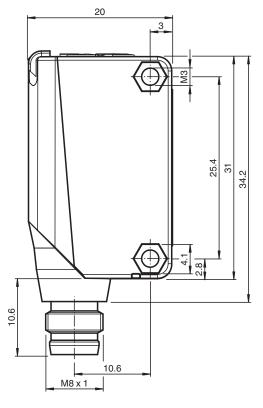





Technical Data System components Emitter M100-6090/95/76a Receiver MV100-6090/95/103 **General specifications** Effective detection range 0 ... 2.8 m Threshold detection range 4 m Light source LED modulated visible red light Light type Diameter of the light spot approx. 0.3 m at a distance of 4 m Opening angle approx. 2° Optical face frontal Ambient light limit EN 60947-5-2 Functional safety related parameters $MTTF_d$ 860 a 20 a Mission Time (T_M) Diagnostic Coverage (DC) 0 % Indicators/operating means Operation indicator LED green: power on Function indicator Receiver: LED yellow, lights up when light beam is free, flashes when falling short of the operating reserve; OFF when light beam is interrupted Control elements sensitivity adjustment Control elements Light-on/dark-on changeover switch **Electrical specifications** U_{B} 10 ... 30 V DC Operating voltage Ripple max. 10 % No-load supply current I_0 Emitter: ≤ 15 mA Receiver: ≤ 8 mA Input Test input emitter deactivation at +UB Output Switching type The switching type of the sensor is adjustable. The default setting is: light-on Signal output 1 PNP output, short-circuit protected, reverse polarity protected, open collector Switching voltage max. 30 V DC max. 100 mA, resistive load Switching current ≤ 1.5 V DC Voltage drop U_d 1000 Hz Switching frequency Response time 0.5 ms Conformity EN 60947-5-2 Product standard Approvals and certificates cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure **UL** approval CCC approval CCC approval / marking not required for products rated ≤36 V **Ambient conditions** Ambient temperature -30 ... 60 °C (-22 ... 140 °F) Storage temperature -40 ... 70 °C (-40 ... 158 °F) **Mechanical specifications**

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Housing width

Housing height

Housing depth

Connection

Material Housing

Degree of protection

11 mm 31 mm

20 mm

M8 x 1 connector, 4-pin


PC (Polycarbonate)


IP67

Technical Data


Optical face	PMMA
Mass	approx. 20 g (emitter and receiver)
Tightening torque, fastening screws	0.6 Nm

Connection







Assembly



1	Light-Dark-switching	
2	Sensitivity adjuster	
3	Signal display	yellow
4	Operating display green	

Characteristic Curve

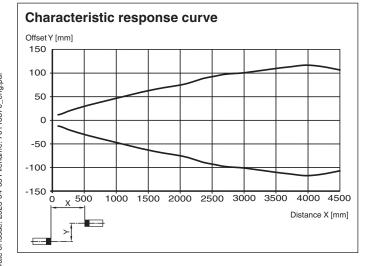

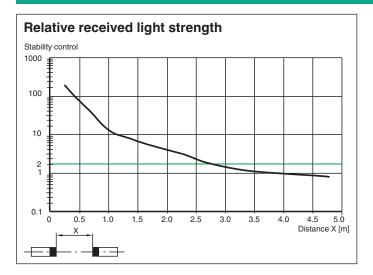

Accessories

	OMH-ML100-09	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-ML100-S2	Mounting aid for ML100 series, mounting bracket
	OMH-ML100-01	Mounting aid for ML100 series, mounting bracket
	OMH-ML100-02	Mounting aid for ML100 series, mounting bracket
	OMH-ML100-03	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-ML100-04	Mounting aid for ML100 series, mounting bracket
	OMH-ML100-05	Mounting aid for ML100 series, mounting bracket
.	OMH-F10-ML100	Mounting aid for ML100 series
	OMH-10	Mounting aid for ML100 series
	OMH-ML100-S1	Mounting bracket