


Laser triangulation sensor with background suppression, ultra-small design with M2 mounting, 15 mm sensing range, light on, PNP output, 2 m fixed cable




Function

The R2 series nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

Dimensions



4





Technical Data

Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 70141859_eng.pdf

General specifications

Detection range Reference target Light source Light type

7 ... 15 mm standard white, 100 mm x 100 mm laser diode modulated visible red light , 680 nm

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com



1

Technical Data

Laser nominal ratings

Laser norminal raings		
Note		LASER LIGHT , DO NOT STARE INTO BEAM
Laser class		1
Wave length		680 nm
Beam divergence		> 5 mrad
Pulse length		approx. 3 µs
Repetition rate		approx. 16.6 kHz
max. pulse energy		9.5 nJ
Black-white difference (6 %/90 %)		< 3 % at 15 mm
Diameter of the light spot		approx. 1.5 mm at a distance of 15 mm
Opening angle		approx. 2 °
Optical face		frontal
Ambient light limit		EN 60947-5-2 : 30000 Lux
Functional safety related parameters		
MTTF _d		800 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0%
Indicators/operating means		
Operation indicator		LED green: Power on flashing: Short circuit/overload indication
Function indicator		LED yellow ON: lights when object is detected
Electrical specifications		LED yellow ON. lights when object is detected
Operating voltage	U _B	12 24 V
		< 10 mA
No-load supply current Protection class	I ₀	
Output Cwitching ture		NO contact / light on
Switching type		NO contact / light on
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 50 mA , resistive load
Voltage drop	U _d	≤ 1.5 V DC
Switching frequency	f	approx. 2 kHz
Response time		250 μs
Conformity		
Product standard		EN 60947-5-2
Laser safety		EN 60825-1:2007
Approvals and certificates		
UL approval		E87056, cULus Recognized, Class 2 Power Source
CCC approval		CCC approval / marking not required for products rated ≤36 V
FDA approval		IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions		
Ambient temperature		-20 60 °C (-4 140 °F)
Storage temperature		-30 70 °C (-22 158 °F)
Mechanical specifications		
Housing width		7.5 mm
Housing height		24 mm
Housing depth		11.2 mm
Degree of protection		IP67
Connection		2 m fixed cable
Material		
Housing		PC/ABS and TPU
Housing Optical face		PC/ABS and TPU PC
Housing width Housing height Housing depth Degree of protection Connection Material		24 mm 11.2 mm IP67

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 70141859_eng.pdf

OBT15-R2-E2-P-L


Technical Data

Installation	Fixing screws , 2 x M2 allen head screws included with delivery
Mass	approx. 20 g
Cable length	2 m

Connection




Assembly



1	Operating display	green
2	Signal display	yellow
3	Emitter	
4	Receiver	


Characteristic Curve

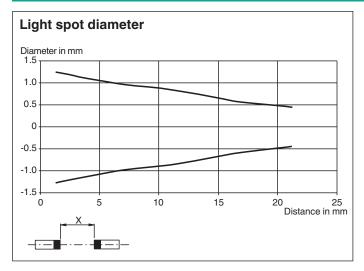

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

3

Characteristic Curve

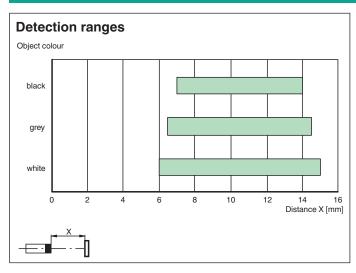

Safety Information



CLASS 1 LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people! Maintenance and repairs should only be carried out by authorized service personnel! Attach the device so that the warning is clearly visible and readable. The warning accompanies the device and should be attached in immediate proximity to the device. Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Accessories

Release date: 2023-04-05 Date of issue: 2023-04-05 Filename: 70141859_eng.pdf


	MH-R2-01	Mounting aid for R2 series, Mounting bracket
519	MH-R2-02	Mounting aid for R2 series, Mounting bracket

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Acces	Accessories					
	MH-R2-03	Mounting aid for R2 series, Mounting bracket				
	MH-R2-04	Mounting aid for R2 series, Mounting bracket				

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 Gr

 www.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com

5