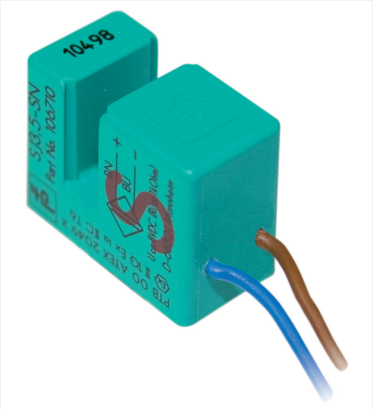


Inductive slot sensor


SJ3,5-SN-Y70190652

- 3.5 mm slot width
- Usable up to SIL 3 acc. to IEC 61508
- Extended temperature range
- Customized lead length

Function

The inductive slot sensors are suitable for use in particularly tight installation spaces, e.g. for limit detection in pointer instruments. In addition to the reference target, ferromagnetic metals can also be used as actuator elements. With a variety of approvals for use in hazardous areas, the sensors are equipped for global use.
In combination with a safety switch amplifier from Pepperl+Fuchs, e.g. KFD2-SH-EX1, use in safety-related applications up to SIL 3 is possible. The sensor can also be used in applications up to SIL 2 with safety-related NAMUR switch amplifiers.

Dimensions

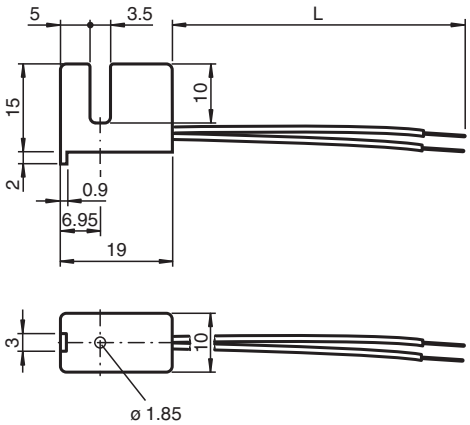

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR with safety function
Slot width		3.5 mm
Depth of immersion (lateral)		5 ... 7 typ. 6 mm
Reference target		10 x 7 x 0.3 mm³, Al
Output type		2-wire
Nominal ratings		
Nominal voltage	U_o	8.2 V (R_i approx. 1 kΩ)
Switching frequency	f	0 ... 3000 Hz
Hysteresis	H	with NAMUR switch amplifier: 0.045 mm (e. g. Pepperl+Fuchs KCD2-SR-Ex1.LB) with safety switch amplifier 0.025 mm (e. g. Pepperl+Fuchs KFD2-SH-Ex1)
Suitable for 2:1 technology		yes , with reverse polarity protection diode
Rate of current rise		-4.5 mA / mm


Release date: 2026-01-16 Date of issue: 2026-01-16 Filename: 70190652_eng.pdf

Technical Data

Current consumption		
Measuring plate not detected		≥ 3 mA
Measuring plate detected		0.2 ... 1 mA
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
$MTTF_d$		11800 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN IEC 60947-5-2
Approvals and certificates		
IECEx approval		
Equipment protection level Ga		IECEx PTB 11.0092X
Equipment protection level Gb		IECEx PTB 11.0092X
Equipment protection level Da		IECEx PTB 11.0092X
Equipment protection level Mb		IECEx PTB 11.0092X
ATEX approval		
Equipment protection level Ga		PTB 00 ATEX 2049 X
Equipment protection level Gb		PTB 00 ATEX 2049 X
Equipment protection level Da		PTB 00 ATEX 2049 X
UL approval		cURus Recognized Load Type: General Purpose Circuitry: Class 2 Power Source Supply/Switching Voltage: 8.2 V DC Further UL information see section "Additional Information"
Ordinary Location		E87056
Control drawing		116-0454
CCC approval		
Hazardous Location		2020322315002308
NEPSI approval		
NEPSI certificate		GYJ16.1392X
Ambient conditions		
Ambient temperature		-50 ... 100 °C (-58 ... 212 °F) Safety application: -40 ... 100°C
Mechanical specifications		
Connection type		flexible leads LiY
Housing material		PBT
Degree of protection		IP67
Cable		
Cable diameter		1.1 mm ± 0.1 mm
Bending radius		> 10 x cable diameter
Material		PVC
Core cross section		0.14 mm^2
Length	L	90 mm
Dimensions		
Height		15 mm
Width		10 mm
Length		19.5 mm
Note		adjustable stop Security relevant only up to -40°C
General information		
Use in the hazardous area		see instruction manuals

Release date: 2026-01-16 Date of issue: 2026-01-16 Filename: 70190652_eng.pdf

Connection Assignment



Additional Information

Additional UL Information
Conditions of Acceptability:
Strain relief test shall be determined in the end-use application.
Suitability of the mounting means shall be determined in the end use application. The suitability of connection between supply connection and the end connector shall be determined in the end-use application.
The supply connections for these devices are intended for factory wiring only.
These devices shall be used within their recognized electrical ratings.
These proximity switches are intended to be powered by Listed Class 2 power supply or are located in a limited voltage / limited current circuit.

Release date: 2026-01-16 Date of issue: 2026-01-16 Filename: 70190652_eng.pdf

Application



Danger!
In safety-related applications the sensor must be operated with a qualified fail safe interface from Pepperl+Fuchs, such as KFD2-SH-EX1.
Consider the "exida Functional Safety Assessment" document which is available on www.pepperl-fuchs.com as an integral part of this product's documentation.

Release date: 2026-01-16 Date of issue: 2026-01-16 Filename: 70190652_eng.pdf