


### Terminal module for NAMUR sensors



# Function

This terminal block module is equipped with a diode network and is designed for use with the KFD2-SRA-Ex4 barrier with its exclusive 2:1 operating mode. This terminal block will interface with NAMUR sensors that are not equipped with an integrated diode or with dry contacts located in the hazardous area.

# Connection

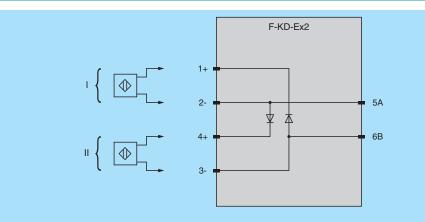

# Ex Zone 1, 2

# **Technical Data**

# Conformity

Conformity			
Degree of protection	IEC 60529:2001		
Mechanical specifications			
Degree of protection	IP20		
Connection	spring terminals		
Core cross section	0.08 2.5 mm <sup>2</sup>		
Mass	approx. 100 g		
Dimensions	6.5 x 90.5 x 68.5 mm (0.2 x 3.6 x 2.7 inch) (W x H x D)		
Height	90.5 mm		
Width	6.5 mm		
Depth	68.5 mm		
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001		

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com



2:1


# **Technical Data**

#### Data for application in connection with hazardous areas

Certificate		DOC-0097, see instruction manuals			
Temperature class		T6	T6	Τ4	
Voltage	Ui	≤ 16 V	≤ 16 V	≤ 16 V	
Current	l <sub>i</sub>	≤ 14 mA	≤21 mA	≤ 52 mA	
Power	Pi	≤ 35 mW	≤66 mW	≤ 169 mW	
Ambient temperature		72 °C	66 °C	80 °C	
Internal capacitance	Ci	0 F			
Internal inductance	Li	0 H			
General information					
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com.			

### Assembly



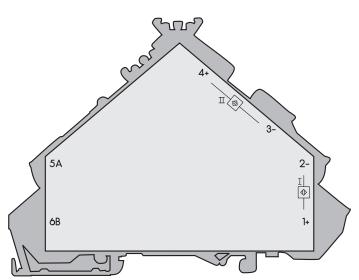

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"


2

# Application

#### Requirements for using the 2:1-transfer method

In the 2:1-transfer method the switch amplifier transfers digital signals from the hazardous area by means of the patented new 2:1-transfer method. This method allows to transfer two independent digital signals by means of a single pair of conductors.

The prerequisite for the use of the 2:1-transfer method is that sensors with reverse polarity protected diode are used. Pepperl+Fuchs offers suitable sensors for alternating polarity. When using sensors without integrated reverse polarity protection diode, clamp modules F-KD-Ex2 or F-KDR-Ex2 (with diode network) have to be fitted. In case of F-KDR-Ex2, a resistor combination has been fitted in addition for line fault detection of mechanical switches.

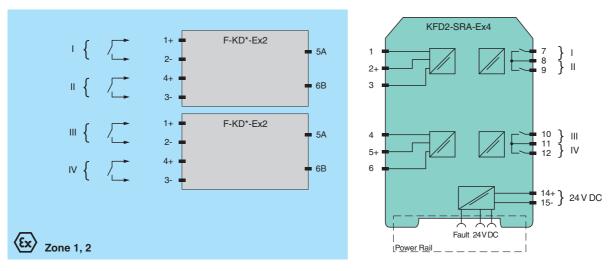

#### Comments

When installing a serial diode, it has to be assured that the current in reverse direction is below a value of 0.15 mA in order to enable the line fault detection.

