


# Glass fiber optic

## LCR 18-2,7-1,0-K9



Glass fiber optic - thru-beam with PVC covering

### Dimensions

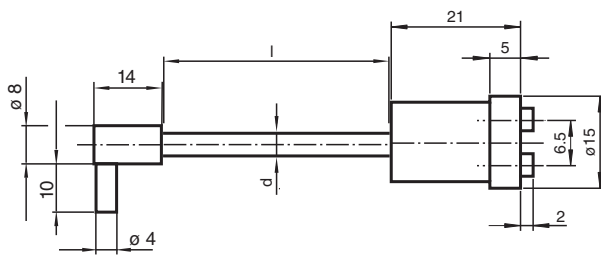

### Technical Data

#### General specifications

|                       |    |                                  |
|-----------------------|----|----------------------------------|
| Fiber optic length    | l  | 1000 mm                          |
| Fiber optic diameter  | d  | 5.3 mm                           |
| Adapter form          |    | 18                               |
| End piece             |    | Thread / cylindrical right angle |
| Bending radius        |    | min. 15 mm                       |
| Fiber bundle diameter |    | 2.7 mm                           |
| Fiber configuration   | Fv | optical seperated                |
| Angle of divergence   |    | 68 °                             |

#### Approvals and certificates

|           |  |    |
|-----------|--|----|
| Approvals |  | CE |
|-----------|--|----|

#### Ambient conditions

|                     |  |                                                                                                  |
|---------------------|--|--------------------------------------------------------------------------------------------------|
| Ambient temperature |  | -20 ... 85 °C (-4 ... 185 °F) [Adapter]<br>-20 ... 85 °C (-4 ... 185 °F) [End head and Covering] |
| Storage temperature |  | -20 ... 85 °C (-4 ... 185 °F)                                                                    |

#### Mechanical specifications

|                      |  |      |
|----------------------|--|------|
| Degree of protection |  | IP65 |
|----------------------|--|------|

Release date: 2021-07-05 Date of issue: 2021-07-05 Filename: 040402\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Technical Data

|                               |                                   |
|-------------------------------|-----------------------------------|
| Material                      |                                   |
| Optical face                  | glass                             |
| Sheathing                     | PVC                               |
| Core                          | Glass fiber                       |
| End piece                     | Stainless steel 1.4305 / AISI 303 |
| Adapter                       | PBT                               |
| Extraction force              | 100 N                             |
| <b>Fiber optic amplifiers</b> |                                   |
| Device series                 | VL18LL<br>VariKont M              |

## Application

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Release date: 2021-07-05 Date of issue: 2021-07-05 Filename: 040402\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com