



CE

**Model Number**

NCN15-30GM70-B3-V1

Features

- Comfort series
- NO/NC selectable
- Prefailure message and indicator

Accessories**BF 30**

Mounting flange, 30 mm

V1-W

Female connector, M12, 4-pin, field attachable

V1-G-2M-PUR

Female cordset, M12, 4-pin, PUR cable

V1-W-2M-PUR

Female cordset, M12, 4-pin, PUR cable

Technical Data**General specifications**

Switching function		Normally open/closed (NO/NC) programmable
Output type		AS-Interface
Rated operating distance	s_n	15 mm
Installation		non-flush
Assured operating distance	s_a	0 ... 12.1 mm
Reduction factor r_{Al}		0.38
Reduction factor r_{Cu}		0.36
Reduction factor r_{304}		0.72
Reduction factor r_{Brass}		0.45
Output type		2-wire

Nominal ratings

Operating voltage	U_B	26.5 ... 31.9 V via AS-i bus system
Switching frequency	f	0 ... 50 Hz
Hysteresis	H	typ. 5 %
Time delay before availability	t_v	≤ 1000 ms
Switching state indicator		Multihole-LED, yellow

Standard conformity

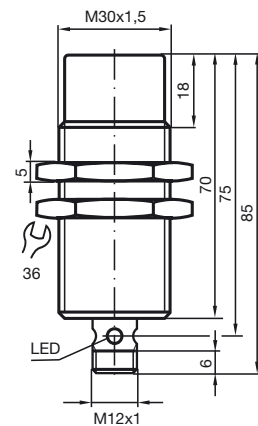

Standards		IEC / EN 60947-5-2:2004
-----------	--	-------------------------

Ambient conditions

Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Housing material		Stainless steel
Sensing face		PBT
Degree of protection		IP67

Dimensions**Electrical Connection**

**Programming Instructions**

Adresse 00 preset , alterable via Bus-
master or programming units
IO-code 1
ID-code 1

Data bit

Bit	Function
D0	Switching state
D1	pre-fault signal (dynamic)
D2	ready for operation
D3	not used

Parameter bit

Bit	Function
P0	not used
P1	Switching element function NO* / NC
P2	not used
P3	not used

* Standard setting