


# Glass fiber optic LCE 18-2,3-5,0-K2



■ M8 x 1 thread

Glass fiber optic - thru-beam with PVC covering

## Dimensions

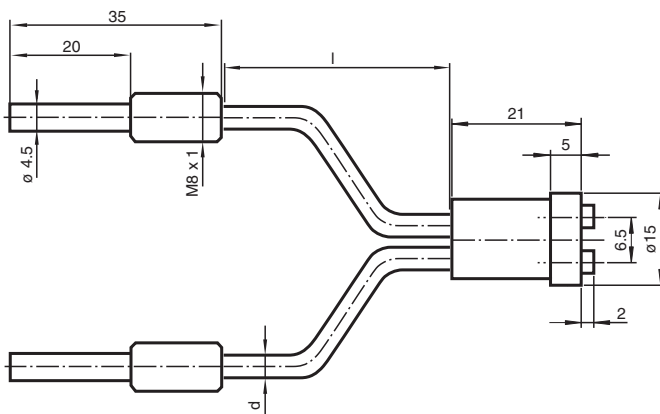

## Technical Data

### General specifications

|                       |   |            |
|-----------------------|---|------------|
| Fiber optic length    | l | 5000 mm    |
| Fiber optic diameter  | d | 5.3 mm     |
| Adapter form          |   | 18         |
| End piece             |   | thread     |
| Bending radius        |   | min. 10 mm |
| Fiber bundle diameter |   | 2.3 mm     |

### Approvals and certificates

|           |  |    |
|-----------|--|----|
| Approvals |  | CE |
|-----------|--|----|

### Ambient conditions

|                     |  |  |
|---------------------|--|--|
| Ambient temperature |  | -20 ... 85 °C (-4 ... 185 °F) [Adapter]<br>-20 ... 85 °C (-4 ... 185 °F) [End head and Covering] |
| Storage temperature |  | -20 ... 85 °C (-4 ... 185 °F)  |

### Mechanical specifications

|                      |  |       |
|----------------------|--|-------|
| Degree of protection |  | IP65  |
| Material             |  |       |
| Optical face         |  | glass |

Release date: 2021-07-07 Date of issue: 2021-07-07 Filename: 098887\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

**Technical Data**

|                               |                                   |
|-------------------------------|-----------------------------------|
| Sheathing                     | PVC                               |
| Core                          | Glass fiber                       |
| End piece                     | Stainless steel 1.4305 / AISI 303 |
| Adapter                       | PBT                               |
| Extraction force              | 100 N                             |
| <b>Fiber optic amplifiers</b> |                                   |
| Device series                 | VL18LL<br>VariKont M              |

## Application

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Release date: 2021-07-07 Date of issue: 2021-07-07 Filename: 098887\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com