


# Surge Protection Barrier

## FN-LB-I



- 1-channel
- Field mount module
- 1/2 NPT thread
- Stainless steel housing
- Max. surge current (8/20  $\mu$ s) 20 kA
- 500 V isolation from earth
- Suitable for hazardous area
- Up to SIL 3 acc. to IEC/EN 61508

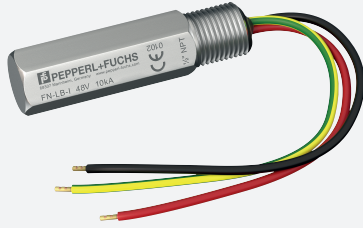

### Function


This Surge Protection Barrier limits induced transients of different origin (e. g. lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge. This barrier provides 85 V line-to-line and 500 V line-to-ground clamping voltage for the protected instruments. It also protects instruments that have less than 500 V isolation-to-ground.

It is installed in an available conduit or cable gland opening like those found on most process transmitters.

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Note:** Surge Protection Barriers must always be connected to a solid and effective ground and be at the same equipotential level as the instrument it is protecting. The ground system must comply with all applicable regulations.

### Connection

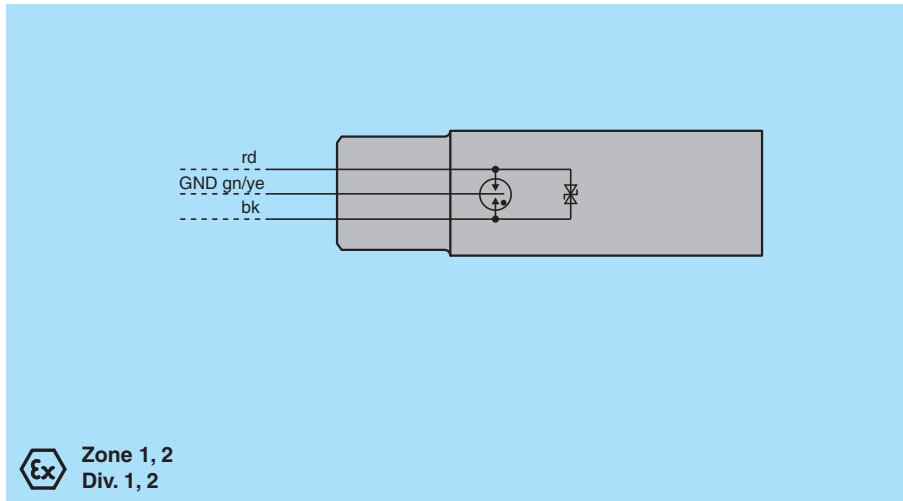

### Technical Data


General specifications			
Number of protected signal lines			1
Functional safety related parameters			
Safety Integrity Level (SIL)			SIL 3
Supply			
Rated voltage	$U_r$		$\leq 48$ V
Rated current	$I_r$		$\leq 250$ mA
Leakage current			$\leq 5$ $\mu$ A
On-state voltage			$\leq 85$ V
Ground insulation			$\geq 500$ V breakdown voltage

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Technical Data

<b>Electrical specifications</b>		
Total discharge current (8/20 $\mu$ s)	$I_{total}$	20 kA
<b>Conformity</b>		
Degree of protection		IEC 60529:2001
<b>Ambient conditions</b>		
Ambient temperature		-30 ... 60 °C (-22 ... 140 °F) For usage in hazardous area observe the EC-type examination certificate.
<b>Mechanical specifications</b>		
Housing material		Stainless steel 1.4401 (AISI 316) surface all over polished
Degree of protection		IP67
Cable		
Length	L	0.3 m
Mass		approx. 200 g
Dimensions		AF22 x 77 mm (0.9 x 3 inch)
Length		77 mm
Width across flats		22
Mounting		NPT1/2 thread
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		PTB 00 ATEX 2175
Marking		Ⓜ II 2G EEx ia IIC T6
Voltage	$U_i$	50 V
Maximum leakage current		10 kA line to ground (common), 5 kA line to line (differential) in accordance to IEC 60-2
Nominal response time		
Symmetrical		1 ns
Asymmetric		100 ns
Bandwidth		$\geq$ 40 kHz
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
<b>International approvals</b>		
CSA approval		
Control drawing		116-0187 (cCSAus)
<b>General information</b>		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Assembly

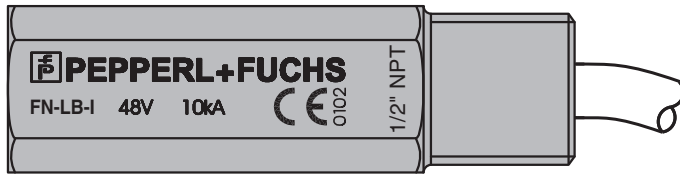

Release date: 2024-01-15 Date of issue: 2024-01-15 Filename: 098918\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**pf** PEPPERL+FUCHS


Connection

Installation examples

Terminal box

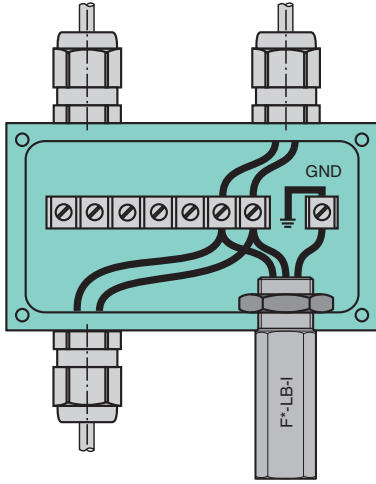

Transmitter

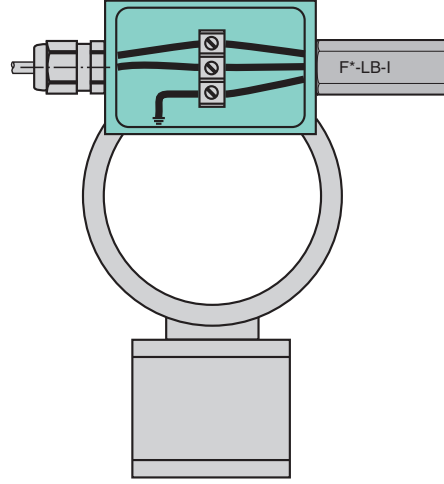

Release date: 2024-01-15 Date of issue: 2024-01-15 Filename: 098918\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com