



Terminal Block with Test Plug Socket KC-CTT-5GN


- 2-pin spring terminal with push-in connection technology
- For KC modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 5 pieces green

Terminal block for KC modules, 2-pin spring terminal, with test sockets, green

Function

The terminal block is suitable for KSystem applications.
The green terminal block is used for connection of field signals as well as the connection of control signals.
This terminal block has integrated test sockets for connection of HART communicators.
The terminal block can be coded with the provided coding pins KF-CP.

Dimensions

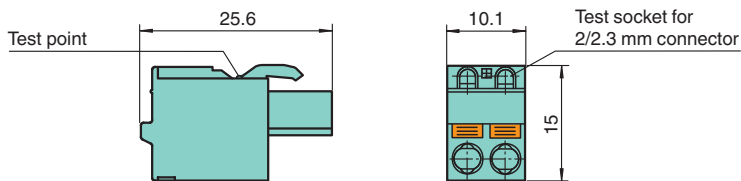

Technical Data

General specifications

Number of pins 2

Mechanical specifications

Core cross section max. 2.5 mm²

Material

Color green

Mass approx. 4 g

Dimensions 10.1 x 15 x 25.6 mm (0.4 x 0.5 x 1 inch)

Construction type spring terminal with integrated test sockets , removable

Structure one-rowed

General information

Packing unit 5 item(s)

Release date: 2023-05-31 Date of issue: 2023-05-31 Filename: 215331_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.