


Label Holder (Ex e)

CFP.Z7.SP

- Label holder for separately printed label
- Ex e certified
- Polyamide
- Component for appropriately certified Ex e enclosures

Label holder for separately printed label, extra small, with type of protection Ex e

Dimensions

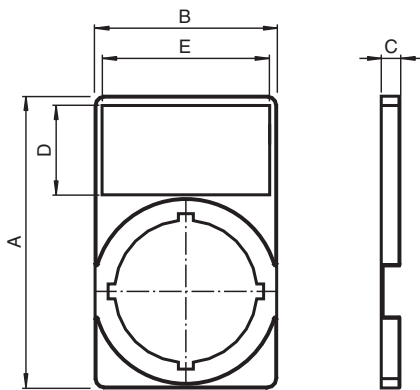

Dimension values see data table.

Image and drawing are generic for this device type and may deviate from the specific variant.

Technical Data

Electrical specifications

Function	Label holder, extra small
Color	black

Mechanical specifications

Degree of protection	IP66
Cable entry face A	
M16 quantity	
Material	Polyamide (PA)
Mass	2 g
Dimensions	
External dimension (A)	49 mm
External dimension (B)	39 mm
External dimension (C)	4.1 mm
Internal dimension (D)	6.6 mm
Internal dimension (E)	29 mm
Mounting	use with base-mounted and cover-mounted contact modules

Ambient conditions

Ambient temperature	-40 ... 55 °C (-40 ... 131 °F)
---------------------	--------------------------------

Data for application in connection with hazardous areas

EU-type examination certificate	CML 16 ATEX 3339U
---------------------------------	-------------------

Release date: 2026-04-07 Date of issue: 2026-04-07 Filename: 290163_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Marking		Ⓔ II 2 GD Ex e IIC Gb Ex tb IIIC Db
International approvals		
IECEx approval		IECEx CML 16.0114U
General information		
Supplementary information		For more information please contact Pepperl+Fuchs.
Enclosure type		LR* SR*.CS* GR.CS*

Release date: 2026-04-07 Date of issue: 2026-04-07 Filename: 290163_eng.pdf