



KVM Workstation KM915 Series

- 15 inch TFT display w/ optional touch screen
- High-bright display for sunlight readability
- Seams continuously welded and ground smooth (Type 4/4X, IP66)
- Connects to host PC via internal KVM extender
- Class I, Div. 2 / ATEX Zone 2 approved



Function

VisuNet IND KM915 rugged industrialized housing was made to extended the control room into the toughest process conditions. The KVM extender option allows the display and the host PC be up to 400 m (1300 ft) apart and is certified for installation in Class I/Div 2 and ATEX Zone 2 hazardous locations.


Designed for manufacturing environments where dust, bacteria, water, and other undesirable materials might accumulate, the enclosure construction and surfaces provide wash down solutions proper drainage to prevent standing water and easily mounts utilizing the industry standard 100 mm VESA.

This 15" monitor features an optional touch screen, keyboard with various mouse options, and choice of one of three KVM types.


Connection

SP7 / SS7

CAT5 Terminals	Description
1.1	BI_DA + WH/GN
1.2	BI_DA - GN
1.3	BI_DB + WH/OR
1.4	BI_DC + BU
1.5	BI_DC - WH/BU
1.6	BI_DB - OR
1.7	BI_DD + WH/BN
1.8	BI_DD - BN




Fiber



CAT5

SP5 / SS5



Fiber



CAT5

Release date: 2022-02-28 Date of issue: 2022-02-28 Filename: 547042_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Dimensions

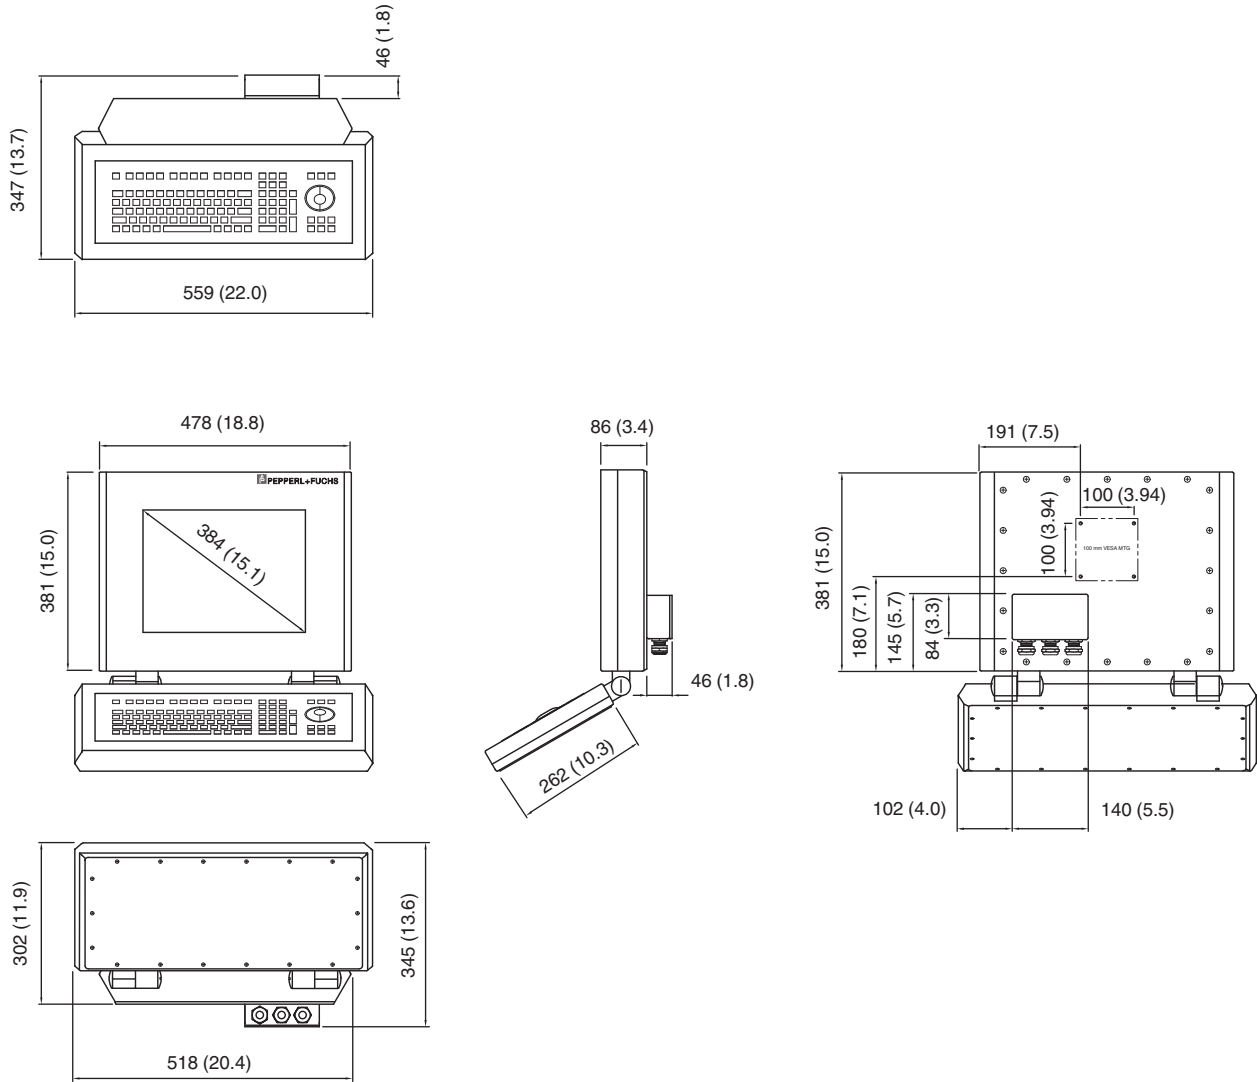

Release date: 2022-02-28 Date of issue: 2022-02-28 Filename: 547042_eng.pdf

Technical Data

General specifications

Distance	Transmitter "K4": 120 m (400 ft) Transmitter "K5": 200 m (650 ft), 62.5 μ multimode; 400 m (1300 ft), 50.0 μ multimode
----------	---

Supply

Connection	Monitor: power, CAT5, fiber (LC)
Power consumption	Main unit: 50 ... 60 Hz; 20-30 VDC Transmitter "K4": 5 VDC @ 10 W, max Transmitter "K5": 5 VDC @ 10 W, max

Indicators/operating means

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical Data

Indicators	Transmitter "K4": video check LED; front panel - power Transmitter "K5": video check LED; front panel - power
Display	
Screen diagonal	15 inch (381 mm)
Response time	Standard: 30 ms High-bright : 25 ms
Resolution	1024 x 768
Color depth	24 bit (16.7 M) color
Contrast	Standard: 800:1 High-bright: 700:1
Brightness	Standard: 350 cd/m ² (nits) High-bright: 1200 cd/m ² (nits)
Reading angle	160° in all directions
Life span	back lamp life: 50,000 hrs typical half life
Input devices	Transmitter "K4": 29-pin DVI-D; 2 x USB Type B (keyboard, mouse/touchscreen); 1 x RS232 (touchscreen); 1 x RJ45 (CAT5e/6) Transmitter "K5": 29-pin DVI-D; 1 x USB Type B (keyboard, mouse/touchscreen); 1 x RS232 (touchscreen); fiber optic (multimode) LC connectors
Touchscreen	5-wire resistive 5-wire hardened resistive
Keyboard	touchpad , optical trackball (50 mm) , joystick
Serial data	
Baud rate	19.2 KBd max
Flow control	RTS, CTS, DTR, DSR
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EEC	EN55022A, EN61000-6-2, EN61000-3-2, EN61000-3-3
Ambient conditions	
Operating temperature	-20 ... 50 °C (-4 ... 122 °F)
Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	0 ... 90% (noncondensing)
Shock resistance	30g, 11 ms, all axis
Vibration resistance	5 ... 100 Hz 1G, 12 m/s ²
Mechanical specifications	
Degree of protection	Type 4X (stainless steel) Type 4 (painted steel) IP66
Material	Main enclosure: painted black steel or 316L stainless steel Main enclosure (rear cover): 6062 anodized aluminum, marine grade
Installation	100 mm (3.9 inch) VESA mount
Mass	Main unit: 11.3 kg (25 lb) without keyboard; 16.8 kg (37 lb) with keyboard Transmitter "K4": 0.3 kg (0.7 lbs) Transmitter "K5": 0.3 kg (0.7 lbs)
Dimensions	Main enclosure: 478 x 381 x 86 mm (18.8 x 15.0 x 3.4 inch), junction box adds 43 mm (1.7 inch) to depth Keyboard enclosure: 559 x 254 x 51 mm (22.0 x 10.0 x 2.0 inch) Transmitter "K4": 104 x 135 x 36 mm (4.1 x 5.3 x 1.4 inch) Transmitter "K5": 104 x 135 x 36 mm (4.1 x 5.3 x 1.4 inch)
Data for application in connection with hazardous areas	
EU-type examination certificate	
Marking	Ⓔ II 3G Ex ic nA IIC T4 Gc
International approvals	
ETL approval	Class I, Div. 2 Groups A, B, C, D; T4

Accessories

	VESA CABLE FEEDTHROUGH	Slimline adapter plate
---	-------------------------------	------------------------

Release date: 2022-02-28 Date of issue: 2022-02-28 Filename: 547042_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com


Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Type Code

K M 9 1 5 T - D 2 - K 5 A C - S S 7 N K 0 L 0 - S 0 - N

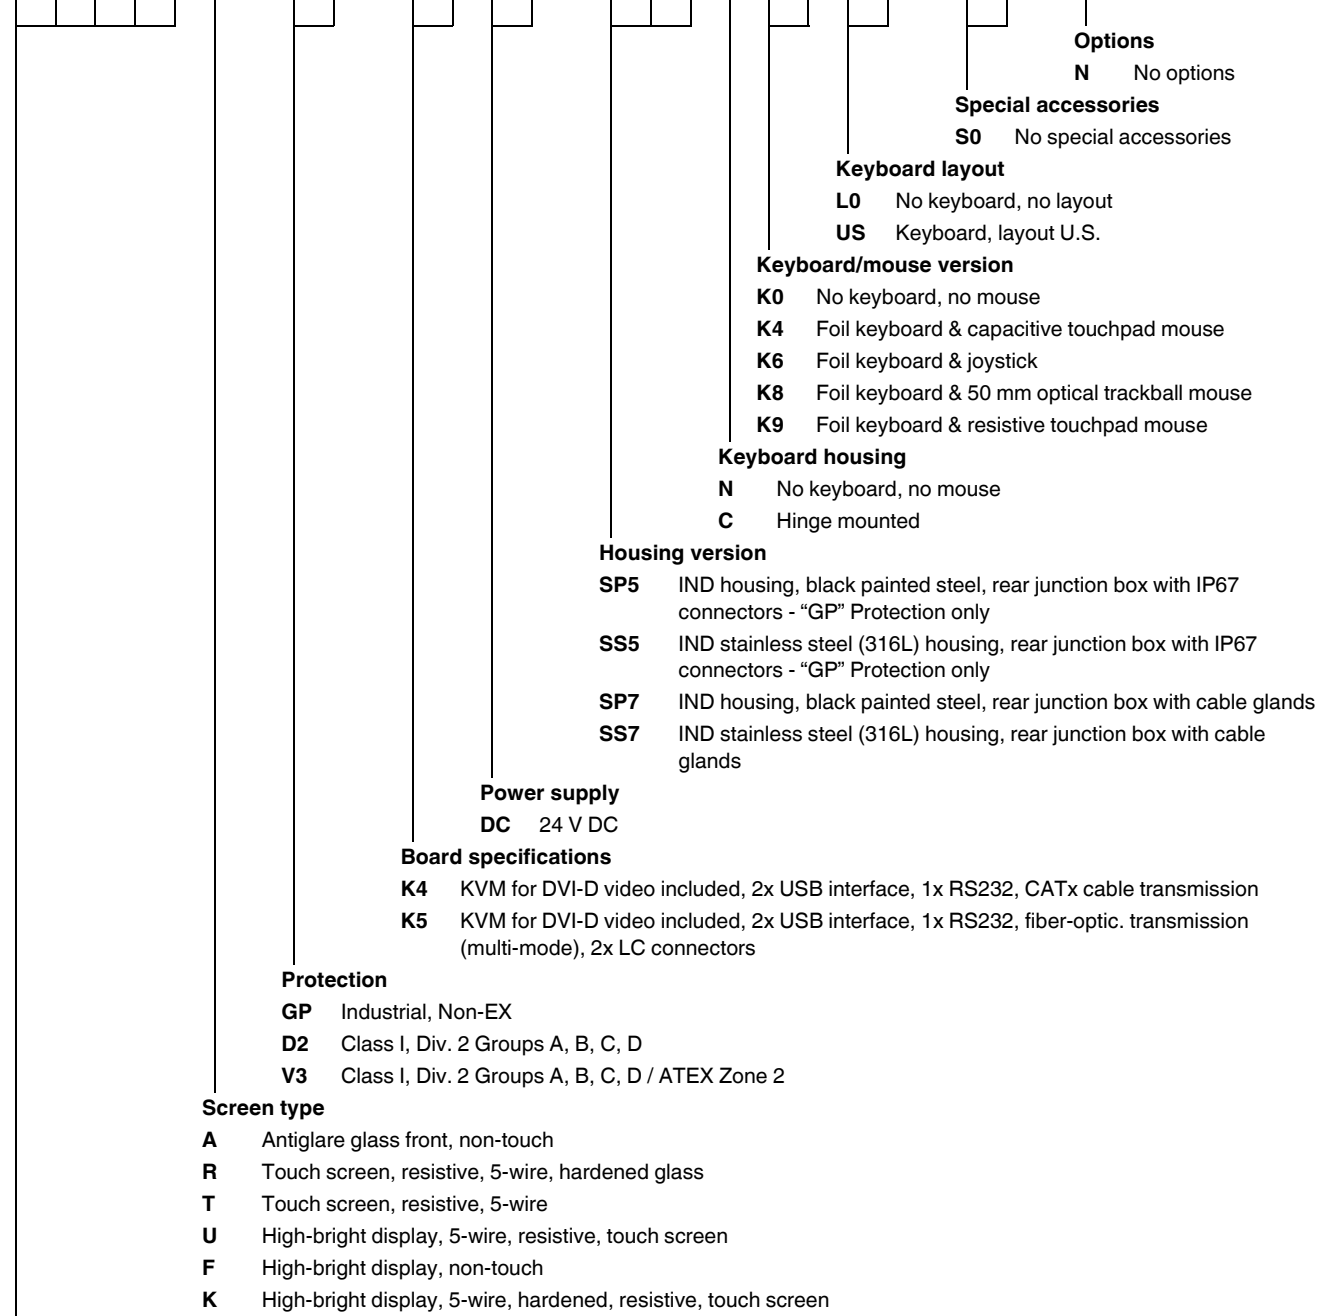

Options
N No options

Special accessories
S0 No special accessories

Keyboard layout
L0 No keyboard, no layout
US Keyboard, layout U.S.

Keyboard/mouse version
K0 No keyboard, no mouse
K4 Foil keyboard & capacitive touchpad mouse
K6 Foil keyboard & joystick
K8 Foil keyboard & 50 mm optical trackball mouse
K9 Foil keyboard & resistive touchpad mouse

Keyboard housing
N No keyboard, no mouse
C Hinge mounted

Housing version
SP5 IND housing, black painted steel, rear junction box with IP67 connectors - "GP" Protection only
SS5 IND stainless steel (316L) housing, rear junction box with IP67 connectors - "GP" Protection only
SP7 IND housing, black painted steel, rear junction box with cable glands
SS7 IND stainless steel (316L) housing, rear junction box with cable glands

Power supply
DC 24 V DC

Board specifications
K4 KVM for DVI-D video included, 2x USB interface, 1x RS232, CATx cable transmission
K5 KVM for DVI-D video included, 2x USB interface, 1x RS232, fiber-optic. transmission (multi-mode), 2x LC connectors

Protection
GP Industrial, Non-EX
D2 Class I, Div. 2 Groups A, B, C, D
V3 Class I, Div. 2 Groups A, B, C, D / ATEX Zone 2

Screen type
A Antiglare glass front, non-touch
R Touch screen, resistive, 5-wire, hardened glass
T Touch screen, resistive, 5-wire
U High-bright display, 5-wire, resistive, touch screen
F High-bright display, non-touch
K High-bright display, 5-wire, hardened, resistive, touch screen

KM915 KVM monitor, 15 in (381 mm), XGA (1024 x 768 pixels), internal KVM

Release date: 2022-02-28 Date of issue: 2022-02-28 Filename: 547042_eng.pdf