




Ultrasonic sensor UB800-18GM40A-E4-610MM-Y

- Short design, 40 mm
- Function indicators visible from all directions
- Switching output
- 5 different output functions can be set
- Program input
- Temperature compensation
- Customer-specific cable length
- Deutsch 4-pin, DT04 connector

Single head system



Dimensions

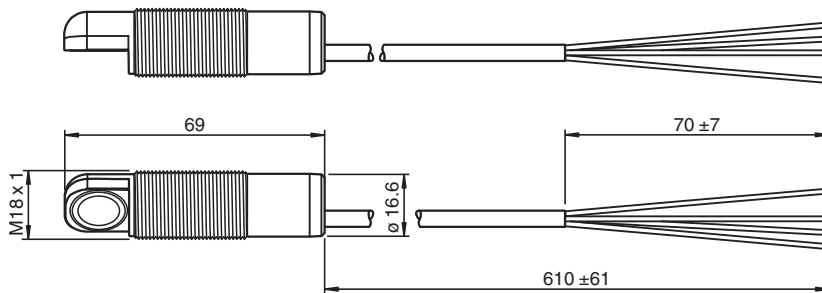

Technical Data

General specifications

| | |
|-----------------------|-----------------|
| Sensing range | 50 ... 800 mm |
| Adjustment range | 70 ... 800 mm |
| Dead band | 0 ... 50 mm |
| Standard target plate | 100 mm x 100 mm |
| Transducer frequency | approx. 255 kHz |
| Response delay | approx. 100 ms |

Indicators/operating means

| | |
|------------|---|
| LED green | Power on |
| LED yellow | indication of the switching state flashing: program function object detected |
| LED red | solid red: Error red, flashing: program function, object not detected |

Electrical specifications

| | | |
|------------------------|-------|----------------|
| Operating voltage | U_B | 10 ... 30 V DC |
| No-load supply current | I_0 | ≤ 20 mA |

Input

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 70126202_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

| | | |
|---|--|---|
| Input type | 1 program input operating distance 1: $-U_B \dots +1 \text{ V}$, operating distance 2: $+6 \text{ V} \dots +U_B$ input impedance: $> 4,7 \text{ k}\Omega$ program pulse: $\geq 1 \text{ s}$ | |
| Output | | |
| Output type | 1 switching output E4, NPN, NO/NC, programmable | |
| Rated operating current | I_e | 200 mA , short-circuit/overload protected |
| Default setting | Switch point A1: 70 mm Switch point A2: 800 mm | |
| Voltage drop | U_d | $\leq 3 \text{ V}$ |
| Repeat accuracy | $\leq 1 \%$ | |
| Switching frequency | f | $\leq 4 \text{ Hz}$ |
| Range hysteresis | H | 1 % of the set operating distance |
| Temperature influence | $\pm 1.5 \%$ of full-scale value | |
| Compliance with standards and directives | | |
| Standard conformity | | |
| Standards | EN IEC 60947-5-2:2020 IEC 60947-5-2:2019 | |
| Approvals and certificates | | |
| UL approval | cULus Listed, Class 2 Power Source | |
| CCC approval | CCC approval / marking not required for products rated $\leq 36 \text{ V}$ | |
| Ambient conditions | | |
| Ambient temperature | $-25 \dots 70 \text{ }^\circ\text{C}$ ($-13 \dots 158 \text{ }^\circ\text{F}$) | |
| Storage temperature | $-40 \dots 85 \text{ }^\circ\text{C}$ ($-40 \dots 185 \text{ }^\circ\text{F}$) | |
| Mechanical specifications | | |
| Connection type | cable | |
| Housing diameter | 18 mm | |
| Degree of protection | IP67 | |
| Material | | |
| Housing | brass, nickel-plated | |
| Transducer | epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT | |
| Cable | | |
| Sheath diameter | 4.8 mm | |
| Bending radius | $> 38.4 \text{ mm}$, fixed $> 72 \text{ mm}$, moving | |
| Material | PVC | |
| Number of cores | 4 | |
| Core cross section | $4 \times 0.5 \text{ mm}^2$ | |
| Length | L | 610 mm |
| Mass | 65 g | |
| General information | | |
| Scope of delivery | Deutsch connector DT04-4P-CE01 Deutsch wedge W4P German contact 0460-202-1631 | |

Connection

Standard symbol/Connections:
(version E4, npn)



Core colours in accordance with EN 60947-5-2.

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 70126202_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com


Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS


Characteristic Curve

Characteristic response curve

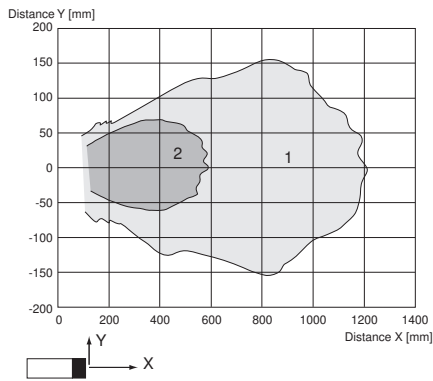

Curve 1: flat surface 100 mm x 100 mm
 Curve 2: round bar, Ø 25 mm

Programmable output modes

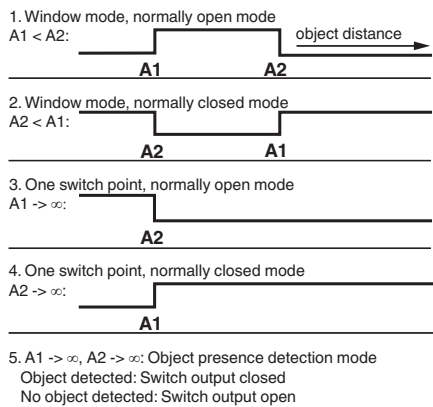

Accessories

| | | |
|--|-----------------|---|
| | UB-PROG2 | Programming unit |
| | OMH-04 | Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm |
| | BF 18 | Mounting flange, 18 mm |
| | BF 18-F | Plastic mounting adapter, 18 mm |
| | BF 5-30 | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm |
| | M18K-VE | Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors |

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 70126202_eng.pdf

Teach-In

Adjusting the switching points

The ultrasonic sensor features a switch output with two teachable switching points. These are set by applying the supply voltage $-U_B$ or $+U_B$ to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. Switching point A1 is taught with $-U_B$, A2 with $+U_B$.

Five different output functions can be set

1. Window mode, normally-open function
2. Window mode, normally-closed function
3. one switching point, normally-open function
4. one switching point, normally-closed function
5. Detection of object presence

TEACH-IN window mode, normally-open function

- Set target to near switching point
- TEACH-IN switching point A1 with $-U_B$
- Set target to far switching point
- TEACH-IN switching point A2 with $+U_B$

TEACH-IN window mode, normally-closed function

- Set target to near switching point
- TEACH-IN switching point A2 with $+U_B$
- Set target to far switching point
- TEACH-IN switching point A1 with $-U_B$

TEACH-IN switching point, normally-open function

- Set target to near switching point
- TEACH-IN switching point A2 with $+U_B$
- Cover sensor with hand or remove all objects from sensing range
- TEACH-IN switching point A1 with $-U_B$

TEACH-IN switching point, normally-closed function

- Set target to near switching point
- TEACH-IN switching point A1 with $-U_B$
- Cover sensor with hand or remove all objects from sensing range
- TEACH-IN switching point A2 with $+U_B$

TEACH-IN detection of objects presence

- Cover sensor with hand or remove all objects from sensing range
- TEACH-IN switching point A1 with $-U_B$
- TEACH-IN switching point A2 with $+U_B$

LED Displays

| Displays in dependence on operating mode | Red LED | Yellow LED |
|--|---------|-----------------|
| TEACH-IN switching point: | | |
| Object detected | off | flashes |
| No object detected | flashes | off |
| Object uncertain (TEACH-IN invalid) | On | off |
| Normal operation | off | Switching state |
| Fault | on | Previous state |

Release date: 2023-02-15 Date of issue: 2023-02-15 Filename: 70126202_eng.pdf