


Metal Data Matrix tag PGV-CTM-2x2

- High chemical resistance
- Low weight
- Self-adhesive mounting
- High temperature resistance
- Robust and insensitive to ambient interference

Metal Data Matrix tag for PGV system

Dimensions

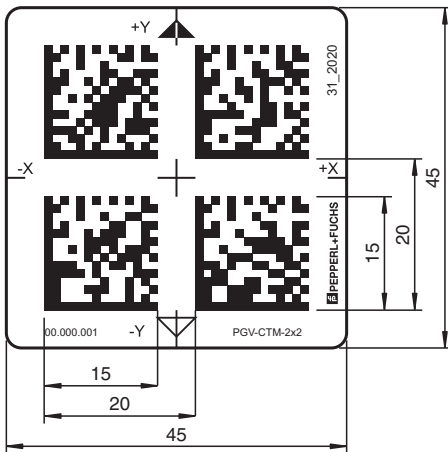

Technical Data

General specifications

Number interval	1 ... 99999999 = Tag number (see Order Information)
Light type	red blue/white Not suitable for infrared light color!

Ambient conditions

Operating temperature	-40 ... 80 °C (-40 ... 176 °F)
Installation temperature	10 ... 40 °C (50 ... 104 °F)
Environmental resistance	UV radiation Humidity
Chemical resistance	Oils Grease Fuels Aliphatic solvents Weak acids

Mechanical specifications

Material thickness	0.5 mm
Material	Aluminum
Mass	3 g
Adhesive	Acrylate-based adhesive ; curing 72 h

Release date: 2024-11-25 Date of issue: 2024-11-25 Filename: 70127529_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Adhesive strength	Average values (FTM2) Metal (stainless steel, aluminum) : 33 N / 25 mm ABS : 32 N / 25 mm PP : 31 N / 25 mm
Note	To achieve a good adhesive bond, the material surfaces being glued must be completely dry and clean. Grease-free solvents such as n-Heptane and isopropyl alcohol are recommended for cleaning. Bonding should be carried out using the highest possible pressure and at a temperature of at least +10 °C. The higher the pressure and temperature, the better the adhesive will penetrate the pores of the base material, resulting in higher adhesive strength.
General information	
Ordering information	see additional information On the next page

Release date: 2024-11-25 Date of issue: 2024-11-25 Filename: 70127529_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com



Additional Information

Example of order information for consecutive tag numbers

Tag numbers from 1 to 5 are required. The order is placed using the tag start number for the number range and the tag end number for the number range. This determines the number of consecutive tag numbers required.

Tag start number: 1

Tag end number: 5

Order information: start: 1; end: 5

Number of tag numbers: 5

—> Tag numbers 1, 2, 3, 4, and 5 are supplied

Example of order information for individual tag numbers

The individual tag numbers 11, 21, 31, and 41 are required. The order is placed using the tag start number and the tag end number. This determines the number of consecutive tag numbers required.

Tag start number: 11; tag end number: 11

Tag start number: 21; tag end number: 21

Tag start number: 31; tag end number: 31

Tag start number: 41; tag end number: 41

Number of tag numbers: 4

—> Tag numbers 11, 21, 31, and 41 are supplied