


Connecting Cable

V1SD-G-GN0,3M-PUR-E1S-V1D-G

- Hard-wearing PUR cable
- Suitable for robotic applications / torsion resistant
- Suitable for drag chains and abrasion resistant
- D coding for Ethernet
- Conforms to PROFINET
- CAT5/CAT5e cable
- Degree of protection IP66 / IP68 / IP69
- Free of paint wetting interfering substances
- UL listed for USA and Canada
- Halogen-free
- Specific design protects against loosening and inaccurate installation

Ethernet bus cable M12 plug straight to M12 plug straight D-coded, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag-chain-suitable, torsion resistant

Dimensions

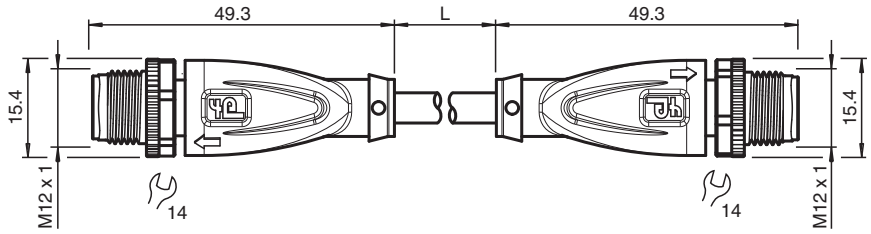

Technical Data

General specifications		
Connector 1		
Connection		plug
Construction type		M12
Style		straight
Locking		screw connection
Number of pins		4
Coding		D-coded
Connector 2		
Connection		plug
Construction type		M12
Style		straight
Locking		screw connection
Number of pins		4
Coding		D-coded
Electrical specifications		
Operating voltage	U_B	max. 250 V AC/DC
Operating current	I_B	max. 4 A
Conformity		
Degree of protection		EN 60529
Plug connection		connector M12 x 1 : IEC 61076-2-101

Release date: 2026-11-10 Date of issue: 2026-11-10 Filename: 70199253_eng.pdf

Technical Data


Component category		CAT5 (IEC 11801) , CAT5e (IEC 61156-6)
Flammability		IEC 60332-1-2 / UL 2556 / ISO 6722-1 5.22 (UN ECE-R 118.01)
Approvals and certificates		
UL approval		AWM STYLE 20549 80 °C 300V AWM I A/B 80 °C 300V FT2 (cable)
UL File Number		E231213
Ambient conditions		
Ambient temperature		
Plug connector		-40 ... 90 °C (-40 ... 194 °F)
Cable, fixed installation		-30 ... 70 °C (-22 ... 158 °F) , UL: -20 ... 70 °C (-4 ... 158 °F)
Cable, flexing		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Plug connector		
Tightening torque		0.6 Nm
Loosening protection		integrated
Tool installation		straight knurling and hexagon nut SW = 14 mm
Mating cycles		min. 100
Shielding		shield connected to screw connection
Degree of protection		IP66 / IP68 / IP69
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		6 mm
Bending radius		> 10 x cable diameter, movable installation > 8 x cable diameter, fixed installation
Sheath stripping force		max. 60 N / 100 mm
Sheath color		green (similar to RAL 6018)
Number of cores		4
Core cross section		0.34 mm^2 / 22 AWG
Cores color		Core 1: yellow Core 2: white Core 3: orange Core 4: blue
Core construction		7 x 0.254 mm Ø twisted quad
Shield		aluminum-lined polyester foil Tinned copper braiding
Length	L	0.3 m
Drag chain suitability		
Drag chain cycles		max. 1000000
Motion velocity		max. 3 m/s
Traverse distance		max. 5 m
Acceleration		max. 2 m/s^2
Torsion cycles		min. 1000000
Torsional stress		± 180 °/m
Torsion velocity		35 cycles/min.
Material		
PWIS free		yes
Halogen-free		yes
Plug connector		
Screw connection		Zinc diecast, nickel-plated
Body		TPU, black
Contact surface		gold plated (Au)
Flammability		V-2
Cable		
Sheathing		PUR based on polyether
Cores		bare copper (Cu)
Core insulation		PP

Release date: 2026-11-10 Date of issue: 2026-11-10 Filename: 70199253_eng.pdf

Technical Data

Flammability		FT2 complies with UN ECE-R 118.01
General information		
Cable marking sleeve		2x PUR transparent , fixed to cable

Connection Assignment

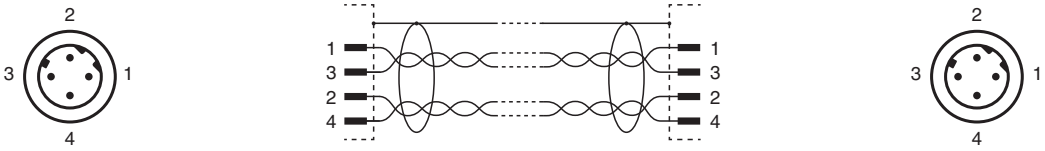

Release date: 2026-11-10 Date of issue: 2026-11-10 Filename: 70199253_eng.pdf