


Contour detection system

Contour2D

MSS-Contour2D-KIT001

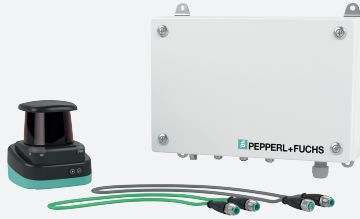

- For detection of the utilization of conveyor belts
- Preinstalled software
- Configurable sensing range
- Quick and easy replacement of system parts possible
- Shadow effect compensation
- Communication via EtherNet/IP

System for detecting the occupancy rate of conveyor belts

Function

The Contour2D system detects the occupancy of a passing conveyor belt from a fixed position with a 2D LiDAR scanner.

The Contour2D system

- determines the occupied part of a conveyor belt.
- determines the average and maximum height of the transported goods.
- ignores objects outside the configurable sensing range.

You can easily set up the system with the included Windows® application.

Technical Data


General specifications

Motion velocity	Max. 1.2 m/s
Sensing range	
Read distance	1000 ... 4000 mm distance to conveyor belt
Width	Conveyor belt: max. 4000 mm

Software

Function	Sampling rate: 100 ... 1000 ms per scan Communication: Ethernet, TCP/IP socket
Operating system	Linux Debian 10

Application

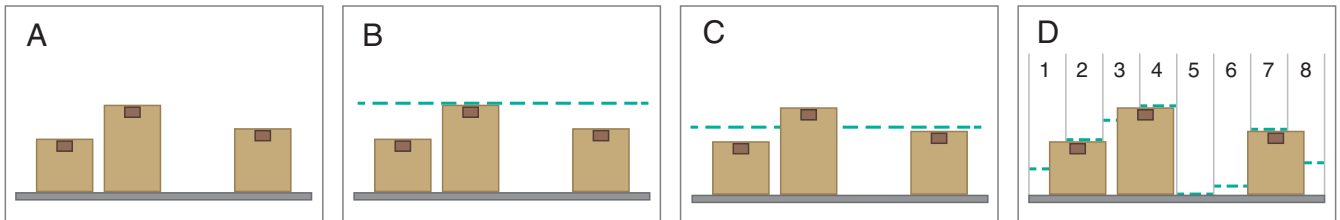

The pre-installed Windows® application allows an easy configuration of the system.

The following information is provided by the application:

- **A**
Utilization in percent
Occupancy in millimeters
- **B**
Maximum height
- **C**
Average height
- **D**
Average height of 8 or 16 zones

The following configurations are supported by the application:

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com




Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

- Sampling rate
- Sensing range

The system communicates via Ethernet using a TCP/IP connection.

Kit component

	MSEU-F600-Contour2D	Part of the Contour2D Smart System
	OMD30M-R2000-B23-V1V1D-HD-1L	R2000 HD, 2-D LiDAR sensor for precise measurement tasks and positioning, measuring range to object up to 30 m, Ethernet
	V1-G-10M-PVC-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey

Release date: 2025-11-19 Date of issue: 2025-11-19 Filename: faa-1019_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com