

Industrial Box PC

BPC3200-N*




- 7th generation Intel Celeron and i5 embedded processor generation
- Supports high performance M.2 NVMe storage
- Robust, fanless industrial design with -20 ... +55 °C
- Installation flexibility: stand-alone PC, Panel PC, system with enclosure
- Integrated intrinsically safe USB ports for keyboard connections

Industrial Box PC

Function

The Box PC 3200 series is based on the 7th Generation Intel® Celeron and i5 (Kaby Lake) embedded processor generation offering a great performance to cost ratio. It supports latest high-speed storage technology (M.2 NVMe 1.3) and extended RAM configurations with up to 16 GB DDR4. The device offers a great application flexibility and can be used as a stand-alone device, as a Panel PC (when mounted on a Pepperl+Fuchs display unit) or as an HMI System (Panel PC installed in a Pepperl+Fuchs enclosure).

Dimensions

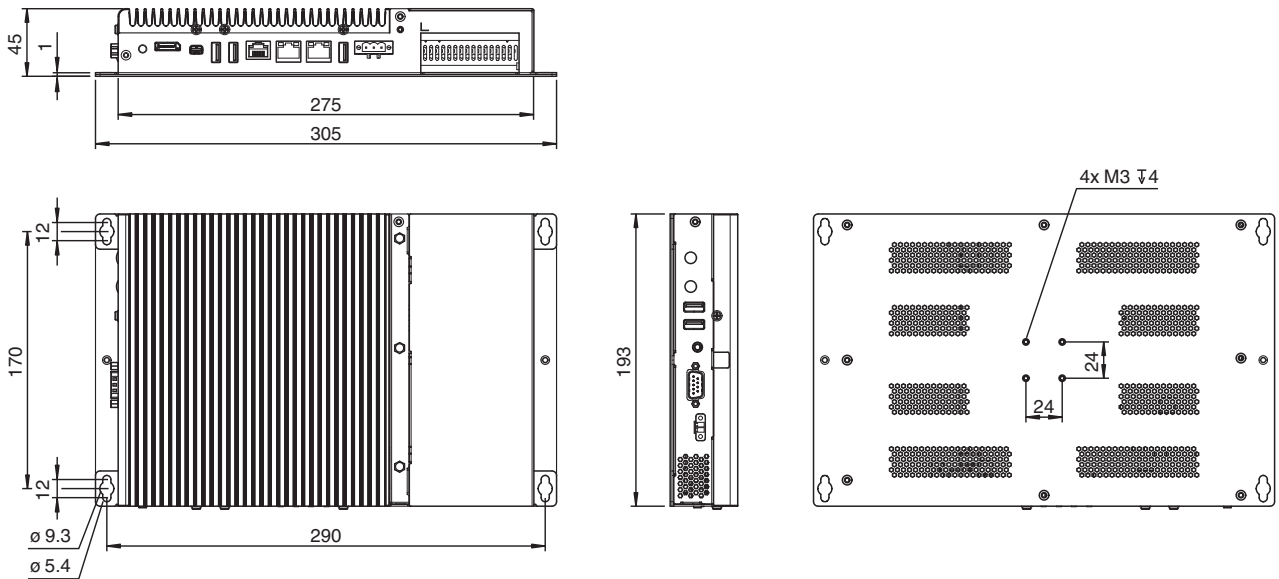

Technical Data

General specifications

Type	Industrial Box PC
Hardware	
Processor	Intel® Core™ i5-7300U Intel® Celeron™ 3965U

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: t195086_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

pf PEPPERL+FUCHS

Technical Data




RAM	2x SO-DIMM slots, supports up to 32 GB DDR4-2133 (one SO-DIMM slot)
	Configurable RAM options: Industrial temperature grade (temperature option A): A: 1x 4GB DDR4-2133 [Celeron] B: 1x 8GB DDR4-2133 C: 1x 16GB DDR4-2133 Wide temperature grade (temperature option B): K: 1x 4GB DDR4-2133 [Celeron] L: 1x 8GB DDR4-2133 M: 1x 16GB DDR4-2133
Mass storage	Storage interface: 1x M.2 2242/2280 M Key, PCIe + SATA 3 1x M.2 2242/2280 M Key, 2242/2280, SATA 3, supports Raid 0/1 [i5] Configurable storage options: Industrial temperature grade (temperature option A): A: 32 GB M.2 SATA 3 [Celeron] D: 256 GB M.2 NVMe 1.3 (PCIe 4x) E: 512 GB M.2 NVMe 1.3 (PCIe 4x) Wide temperature grade (temperature option B): K: 32 GB M.2 SATA 3 [Celeron] P: 256 GB M.2 NVMe 1.3 (PCIe 4x) Q: 512 GB M.2 NVMe 1.3 (PCIe 4x)
Supply	
Input current	max. 3 A, max. 60 W
Power consumption	
DC	24 V d. c. (20 ... 28 V d. c.) (SELV/PELV or NEC class 2)
Interface	
Interface type	Backside: 1x Power button w/ LED indicator 1x DisplayPort 1.2 port (supports DP++) 1x mini DisplayPort 1.2 port (supports DP++) 2x USB Ex i ports prepared for Pepperl+Fuchs intrinsically safe keyboard 1x RS232/422/485 port (1x RJ45) 2x RJ45 ports for Gigabit Ethernet (Intel I219 / I210) 1x USB 2.0 port 1x Power input w/ 3 pin terminal block Left side: 2x Antenna holes 2x USB 3.1 Gen1 (5 Gbps) ports 1x 3,5mm audio jack (Line-out) 1x RS232/422/485 port (D-SUB 9) 1x Connector for external power button Internal expansion options: 1x PCIe 4x slot for low profile cards 1x full-size mini PCI Express socket / M.2 2230 E Key socket
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (ind. Locations) EN 61000-6-4:2007+A1:2011 EN 55035:2017/A11:2020 EN 55011:2016+A1:2017
Explosion protection	
Directive 2014/34/EU	EN IEC 60079-0:2018 EN IEC 60079-7:2015/A1:2018 EN 60079-11:2012
RoHS	
Directive 2011/65/EU (RoHS)	EN IEC 63000:2018
Software	
Operating system	Microsoft® Windows® 10 IoT Enterprise 2019 LTSC (x64) VisuNet RM Shell 5 (based on Microsoft® Windows® 10 IoT Enterprise 2019 LTSC (x64)) [Celeron, 4 GB RAM, 32 GB storage] Optional: T: ACP ThinManager Ready BIOS [Celeron, 4 GB RAM, no storage]
Ambient conditions	
Operating temperature	Temperature classes: A: 0 ... 45 °C (32 ... 113 °F) B: -20 ... 55 °C (-4 ... 131 °F) [with wide temperature grade RAM/storage]

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: t195086_eng.pdf

Technical Data

Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	max. relative humidity 93% at 40°C (non-condensing) according to EN60068-2-78
Shock resistance	Acceleration: 15 g Duration: 11 ms Shocks: 18 (3 per axis per direction)
Vibration resistance	Amplitude / acceleration: +/- 0.075 mm // 1 g Frequency range: 10Hz - 150 Hz Sweeps: 20
Mechanical specifications	
Degree of protection	IP 20
Material	Painted sheet metal and extruded aluminum
Mass	approx. 2.5 kg
Dimensions	305 mm x 193 mm x 45 mm
Mounting	Wall mounting, DIN rail (via optional adapter)
International approvals	
UL approval	
Approved for	<p>UL OrdLoc UL approval E223772 UL61010-1 Ed.3 UL 61010-2-201 Ed2 CAN/CSA C22.2 No 61010-1-12 CAN/CSA C22.2 No 61010-2-201</p> <p>UL HazLoc UL approval E492874</p> <p>IS circuits for CL I, DIV 2, GP A-D CL II, DIV 2, GP E, F, G CL III IS circuits for CL I, ZN 2, IIC CL II, ZN 22, IIIB CL III, ZN 22, IIIA Install per drawing 116-0478</p> <p>Mounting in CL I, DIV 2, GP A-D, T4 CL II, DIV 2, GP E, F, G CL III Mounting in CL I, ZN 2, IIC, T4 CL II, ZN 22, IIIB CL III, ZN 22, IIIA</p>
ATEX approval	
ATEX certificate	UL 22 ATEX 2478X
ATEX marking	II 3 G Ex ec [ic Gc] IIC T4 Gc
IECEX approval	
IECEX certificate	IECEX ULD 22.0016X
IECEX marking	Ex ec [ic Gc] IIC T4 Gc
IECEX standard	IEC 60079-0:2017 Ed 7.0 IEC 60079-7:2017 Ed 5.1 IEC 60079-11:2011 Ed 6.0

Accessories

	DPU3200-19SC-304A-V1-N0	Display Unit
	DPU3200-15FC-304A-V1-N0	Display Unit
	DPU3200-22FC-304A-V1-N0	Display Unit

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: t195086_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Type Code

Model	Certification	Temperature	Power Supply Unit	Computing platform	RAM	Storage	Operating System & Software	Options
Model								
BPC3200-	Stand-alone Box PC							
Certification								
N	Industrial, non-ex general purpose							
M	ATEX & IECEx Zone 2 and Class I, Div 2							
Temperature								
A-NNNN-	0 ... 45 °C							
B-NNNN-	-20 ... 55 °C							
Power Supply Unit								
D-	24 V DC							
Computing Platform								
1N	Intel Celeron 3965U							
2N	Intel Core i5-7300U							
RAM								
A	1x 4 GB, industrial temperature grade [only Temperature "A", Operating System "2NN-"]							
B	1x 8 GB, industrial temperature grade [only Temperature "A"]							
C	1x 16 GB, industrial temperature grade [only Temperature "A"]							
K	1x 4 GB, wide temperature grade							
L	1x 8 GB, wide temperature grade							
M	1x 16 GB, wide temperature grade							
Storage								
A	32 GB, industrial grade, M.2 SATA [only Temperature "A", Operating System "2NN-"]							
D	256 GB, industrial temperature grade, M.2 NVMe [only Temperature "A"]							
E	512 GB, industrial temperature grade, M.2 NVMe [only Temperature "A"]							
K	32 GB, wide temperature grade, M.2 SATA							
P	256 GB, wide temperature grade, M.2 NVMe							
Q	512 GB, wide temperature grade, M.2 NVMe							
N	None (only in combination with ACP ThinManager Ready BIOS)							
Operating System & Software								
1NN-	Windows® 10 IoT Enterprise x64 LTSC 2019							
2NN-	Pepperl+Fuchs VisuNet RM Shell 5.x (based on Windows® 10 IoT LTSC 2019)							
TNN-	ACP ThinManager Ready BIOS							
Options								
NN0	Standard							

Example: BPC3200-NA-NNNN-D-2NAA1NN-NN0

Preferred configurations:		
High-performance configuration	BPC3200-NB-NNNN-D-2NLP1NN-NN0	Intel i5-7300U 8 GB DDR4, wide temperature grade 256-GB M.2 NVMe, wide temperature grade Windows® 10 IoT Enterprise LTSC 2019
Thin Client configuration	BPC3200-NA-NNNN-D-1NAA2NN-NN0	Intel Celeron 3965U 4 GB DDR4, industrial temperature grade 32-GB M.2 SATA 3, industrial temperature grade VisuNet RM Shell 5.x (based on Windows® 10 IoT Enterprise LTSC 2019)

Release date: 2023-01-17 Date of issue: 2023-01-17 Filename: t195086_eng.pdf