




Safety light grid with integrated control unit




SLPC8-2

- Sensing range up to 8 m
- 2-radial design
- Beam spacing 500 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Minimum wiring expense due to transceiver with passive mirror column
- Red transmission light
- Usable with or without start/restart disable
- Integrated relay monitor
- 7-segment diagnostic display
- Pre-fault indication
- OSSD outputs as semiconductor or relay outputs



Dimensions

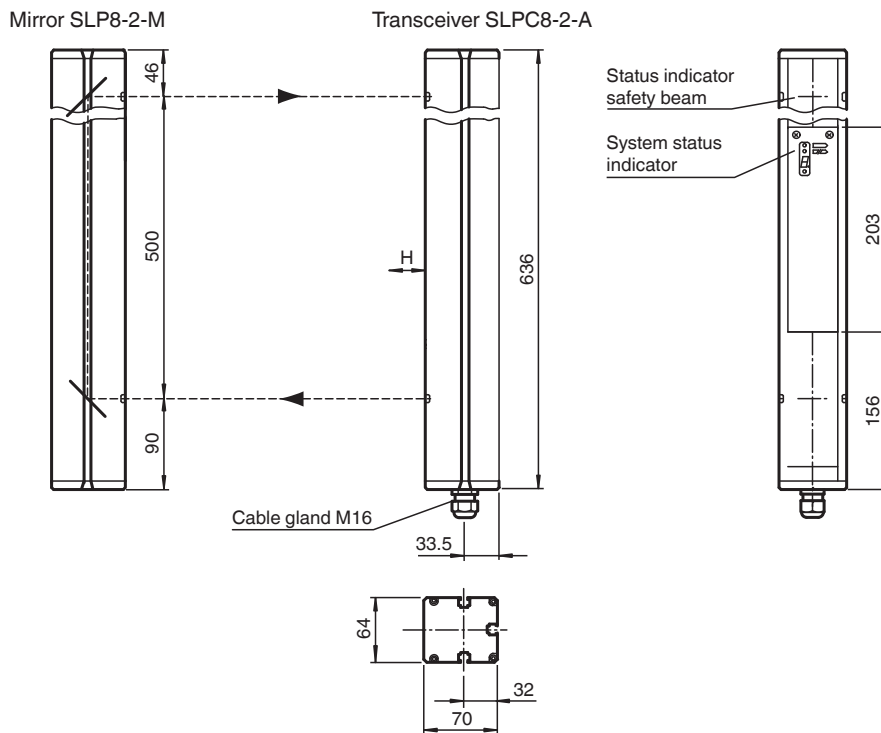

Technical Data

System components	
Transceiver	SLPC8-2-A
Mirror pillar	SLP8-2-M
General specifications	
Effective detection range	0.2 ... 8 m
Light source	LED
Light type	modulated visible red light

Release date: 2020-08-27 Date of issue: 2020-10-06 Filename: 111840_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Tests	IEC/EN 61496	
Safety type according to IEC/EN 61496	4	
Marking	CE	
Target size	static: 32 mm dynamic: 50 mm (at v = 1.6 m/s of the obstacle)	
Beam spacing	500 mm	
Number of beams	2	
Operating mode	Start/restart disable, relay monitor,	
Angle of divergence	< 5 °	
Functional safety related parameters		
Performance level (PL)	PL e	
Category	Cat. 4	
Mission Time (T _M)	20 a	
PFH _d	3.54 E-9	
Type	4	
Indicators/operating means		
Diagnostics indicator	7-segment display	
Function indicator	LED red: per receiver channel off: interruption flashes: receiver continuously on: reception with sufficient stability control on the front plate: LED red: OSSD off LED green: OSSD on	
Pre-fault indicator	LED red next to receiver flashes	
Control elements	10 DIP switch in transceiver terminal compartment	
Electrical specifications		
Operating voltage	U _B	24 V DC -15% / +25% , galvanically isolated
No-load supply current	I ₀	max. 250 mA
Protection class	III , IEC 61140	
Input		
Activation current	approx. 10 mA	
Activation time	0.03 ... 1 s	
Test input	Reset-input for system test	
Function input	Relay monitor, start release	
Output		
Pre-fault indication output	1 PNP, +U _B -2 V, max. 300 mA	
Safety output	2 separated fail safe semiconductor outputs	
Signal output	1 PNP each, max. 300 mA for start readiness, OSSD on, OSSD off	
Switching voltage	Operating voltage -2 V	
Switching current	max. 0.5 A	
Response time	20 ms	
Conformity		
Functional safety	ISO 13849-1	
Product standard	EN 61496-1 ; IEC 61496-2	
Approvals and certificates		
CE conformity	CE	
Approvals	TÜV SÜD	
Ambient conditions		
Ambient temperature	0 ... 50 °C (32 ... 122 °F)	
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)	
Relative humidity	max. 95 %, not condensing	
Mechanical specifications		
Degree of protection	IP65	
Connection	M16 cable gland , terminal compartment with cage-terminals	

Release date: 2020-08-27 Date of issue: 2020-10-06 Filename: 111840_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Connection options	Further electrical connection options on request: Connector DIN 43 651 Hirschmann, emitter: 6-pin+PE, receiver: 11-pin+PE
Material	
Housing	extruded aluminum profile, RAL 1021 (yellow) coated
Optical face	Plastic pane
Mass	Per 2300 g


Connection

Transceiver SLPC8-2-A





Transceiver SLPC... (semiconductor output)	Transceiver SLPC.../31 (relay output)
	1 - Functional earth 2 - 0 V 3 - 24 V
4 - n.c. 5 - - 6 - + 7 - OSSD 1 8 - OSSD 2	
	9 - Input, Relay monitor 10 - Input, Start release 11 - Input, Reset 12 - PNP-output, Soiled optics 13 - n.c. 14 - PNP-output, Startup readiness 15 - PNP-output, Indicator OSSD OFF 16 - PNP-output, Indicator OSSD ON

Characteristic Curve

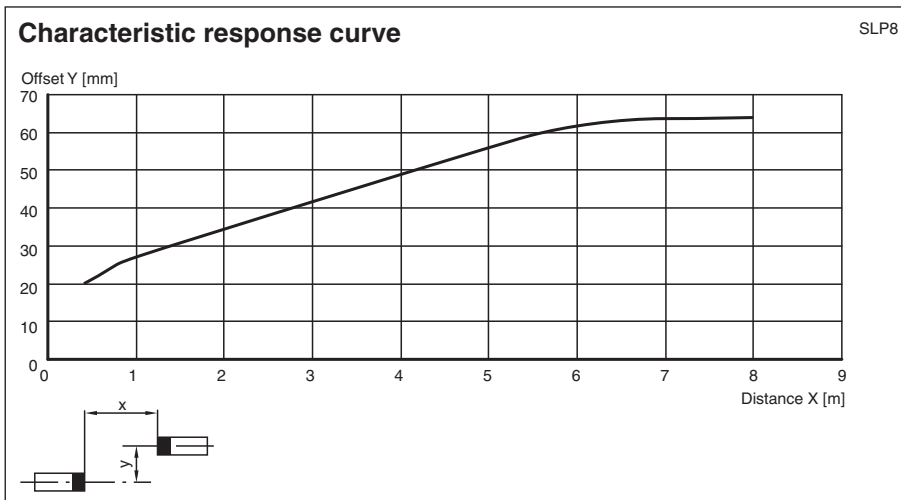





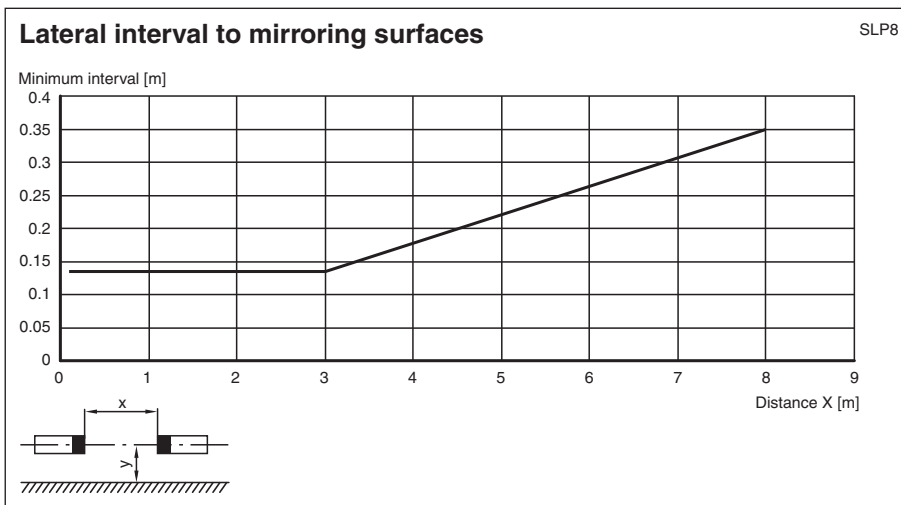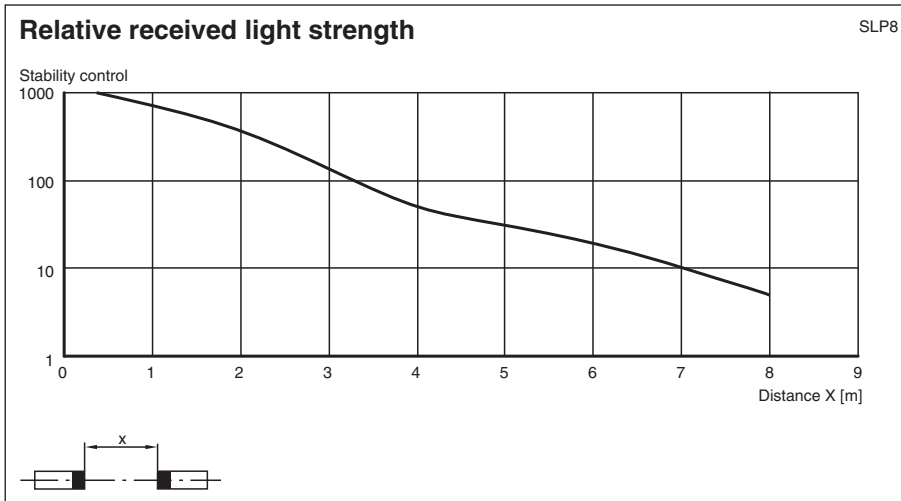


Release date: 2020-08-27 Date of issue: 2020-10-06 Filename: 111840_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".



Accessories

	PG SLP-2	Protective glass panes for SLP series
	PA SLP/SLC	Alignment aid for SLP and SLC series profile light grids
	MS SLP	Mounting bracket for Light grid
	Damping UC SLP/SLC	Shock absorber as ramming protector for all series SLP/SLC devices
	Enclosure UC SLP/SLC	Housing for floor stand
	UC SLP/SLC	Floor stand for all series SLP/SLC devices
	SLP-2-M	Deviation mirror for SLP

Release date: 2020-08-27 Date of issue: 2020-10-06 Filename: 111840_eng.pdf