

# Thru-beam sensor LD28/LV28-F1/76a/82b/110/115



- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
- Highly visible LED as alignment aid in receiver optics
- Emitter with test input
- Version with red light

Universal thru-beam sensor, large housing design, 30 m detection range, red light, 25 kHz transmission frequency, light/dark on, DC version, push-pull output, test input, pre-fault output, fixed cable




#### **Function**

The series 28 family of sensors can be universally used. It has a large range of models that allows it to be integrated into any automation environment. The sensors are contained in sturdy water resistant plastic housings with multiple fastening options and scratch resistant optical cover. Features such as a timer function, and functions including a light/dark switch, sensitivity adjuster and highly visible status LEDs make for less effort on the part of the user and streamline installation, setup and operation. Just about any task associated with positioning, moving, conveying and monitoring can be accomplished with these sensors.

#### **Application**

- Object tracking in material handling, and the packaging sector
- · Material flow monitoring
- Bin occupancy check in storage technology
- Fine positioning in high-bay warehouses
- Presence and height monitoring on pallet conveyors
- · Single-beam protection for automatic industrial gates and elevator doors
- Protection at automatic gates

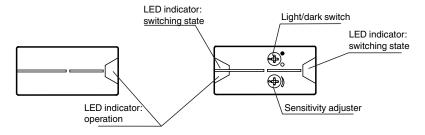


## **Technical Data**

System components	
Emitter	LD28-F1/76a/115
Receiver	LV28-F1/82b/110/115
General specifications	
Effective detection range	0 30 m
Threshold detection range	40 m
Light source	LED
Light type	modulated visible red light , 660 nm
Alignment aid	LED red (in receiver lens) illuminated constantly: beam is interrupted, flashes: reaching switching point, off: sufficient stability control
Transmitter frequency	F1 = 25 kHz
Diameter of the light spot	approx. 0.6 m at 30 m
Angle of divergence	Emitter 1.2°, Receiver 5°
Ambient light limit	50000 Lux
Functional safety related parameters	
MTTF <sub>d</sub>	620 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	90 %
Indicators/operating means	
Operation indicator	LED green

Technical Data		
Teemilear Bata		
Function indicator		LED yellow:  1. LED lit constantly: signal > 2 x switching point (function reserve)  2. LED flashes: signal between 1 x switching point and 2 x switching point  3. LED off: signal < switching point
Control elements		sensitivity adjustment (Adjustment to $<\!25\%$ of the effective operating range) , Lighton/dark-on changeover switch
Electrical specifications		
Operating voltage	U <sub>B</sub>	10 30 V DC
Ripple		10 %
No-load supply current	I <sub>0</sub>	Emitter: ≤ 50 mA Receiver: ≤ 35 mA
Input		
Test input		emitter deactivation at $+U_B$ ( $I_{max.}$ < 3 mA at 30 V DC)
Output		
Pre-fault indication output		1 PNP transistor, short-circuit protected, protected from reverse polarity, open collector, Umax = $30 \text{ V}$ DC, Imax = $0.2 \text{ A}$ The output becomes inactive if the signal level has fallen below the function reserve for approx. $10 \text{ s}$ (yellow and red LEDs flash). If the light beam is interrupted four times during this period, the output immediately becomes inactive.
Switching type		light/dark on, switchable
Signal output		1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Switching frequency	f	1000 Hz
Response time		0.5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011
Protection class		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed , Class 2 power source
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 60 °C (-40 140 °F)
Storage temperature		-40 75 °C (-40 167 °F)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm
Housing depth		54.3 mm
Degree of protection		IP67
Connection		2.5 m, 5-wire, fixed cable, Euronorm
Material		
Housing		Plastic ABS
Optical face		Plastic pane
Mass		140 g (emitter and receiver)


**5**PEPPERL+FUCHS

# **Connection Assignment**

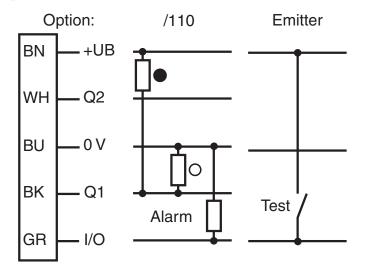


- O = Light on
- = Dark on


### **Assembly**




## **Characteristic Curve**

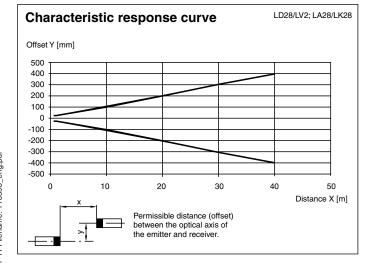

## Thru-beam sensor

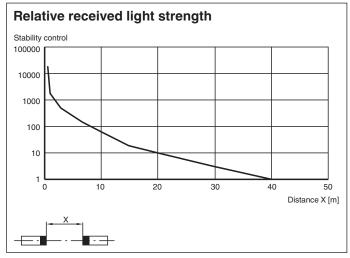



## **Accessories**

6	OMH-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-RL28-C	Weld slag cover model