

Retroreflective sensor RLK28-55-LAS-Z/31/116

- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
 Programmable time function GAN, GAB, IAB, as well as GAN-
- GAB and GAN-IAB as double function
- Laser version for long ranges
- Version with relay output

Retroreflective sensor with polarization filter



Function


The series 28 family of sensors can be universally used. It has a large range of models that allows it to be integrated into any automation environment. The sensors are contained in sturdy water resistant plastic housings with multiple fastening options and scratch resistant optical cover. Features such as a timer function, and functions including a light/dark switch, sensitivity adjuster and highly visible status LEDs make for less effort on the part of the user and streamline installation, setup and operation. Just about any task associated with positioning, moving, conveying and monitoring can be accomplished with these sensors.

Application

- · Object tracking in material handling, and the packaging sector
- Material flow monitoring
- · Bin occupancy check in storage technology
- Fine positioning in high-bay warehouses
- · Presence and height monitoring on pallet conveyors
- · Single-beam protection for automatic industrial gates and elevator doors
- Protection at automatic gates

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Dimensions

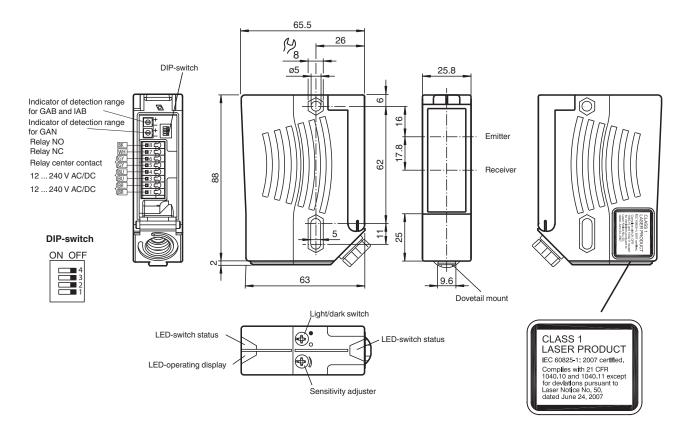

Technical Data

General specifications	
Effective detection range	0 30 m
Reflector distance	0.3 30 m
Threshold detection range	42 m
Reference target	MH82 reflector
Light source	laser diode
Light type	modulated visible red light
Polarization filter	yes
Laser nominal ratings	
Note	LASER LIGHT , DO NOT STARE INTO BEAM
Laser class	1
Wave length	650 nm
Beam divergence	< 1.5 mrad
Pulse length	approx. 4.5 μs
Repetition rate	approx. 6 kHz 20 kHz
max. pulse energy	4 nJ
Diameter of the light spot	approx. 45 mm at 30 m
Opening angle	Emitter: < 0.1 ° Receiver: < 2 °
Ambient light limit	50000 Lux
Functional safety related parameters	
MTTF _d	450 a
Mission Time (T _M)	20 a

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 134128_eng.pdf


Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

Technical Data		
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Function indicator		2 LEDs yellow, light up when light beam is free, flash when falling short of the stability control, off when light beam is interrupted
Control elements		sensitivity adjustment (Adjustment to < 25% of the effective operating range) , Lighton/dark-on changeover switch
Electrical specifications		
Operating voltage	UB	12 240 V AC/DC
Power consumption	P ₀	≤ 3.5 VA
Output		
Switching type		light/dark on switchable
Signal output		Relay, 1 alternator
Switching voltage		max. 250 V AC/DC
Switching current		max. 2 A
Switching power		DC: max. 50 W AC: max. 500 VA
Switching frequency	f	25 Hz
Response time		20 ms
Timer function		ON delay (GAN), OFF delay (GAB), one shot (IAB), ON delay-one shot (GAN-IAB), ON delay-OFF delay (GAN-GAB), programmable adjustment interval 0.1 10 s
Conformity		
Product standard		EN 60947-5-2
Laser safety		EN 60825-1
Approvals and certificates		
Protection class		II, rated insulation voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 Output circuit insulated from control circuit in accordance with IEC 61140. Caution! The protection class 2 is only valid when the terminal compartment is closed.
UL approval		E87056, cULus Listed Caution: This equipment is considered as open-type equipment. It must be mounted within an enclosure, that is suitably designed for protection against internal fire and personal injury resulting from accessibility to live parts according UL 508.
CCC approval		Certified by China Compulsory Certification (CCC)
FDA approval		IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007
Ambient conditions		
Ambient temperature		-10 50 °C (14 122 °F)
Storage temperature		-40 60 °C (-40 140 °F)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm
Housing depth		65.5 mm
Degree of protection		IP67
Connection		terminal compartment with 8 spring-loaded terminals for wire cross section 0.5 1.5 $\rm mm^2$, Insulation stripping 7.5 8.5 mm , M16 x 1.5 cable gland
Material		
Housing		Plastic ABS
Optical face		Plastic pane
Mass		112 g

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"


RLK28-55-LAS-Z/31/116

Connection Assignment

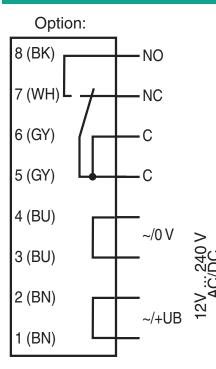

The relay-functions "NC" and "NO" bear on the switching mode "Dark-ON". This complies to the default setting of the light/dark switch (factory setting).

Characteristic Curve

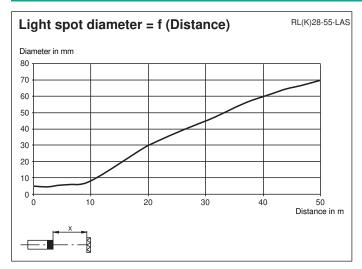


Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 134128_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Retroreflective sensor

Characteristic Curve

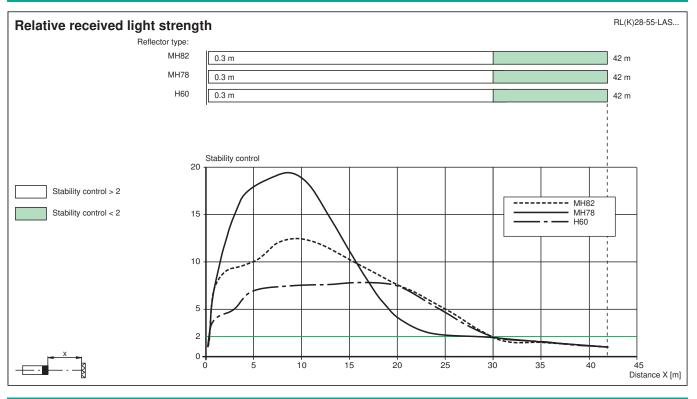

Application



Safety Information

CLASS 1

LASER PRODUCT IEC 60825-1: 2007 certified. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com



Safety Information

Laser Class 1 Information The irradiation can lead to irritation especially in a dark environment. Do not point at people! Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable. Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Accessories

0.0	ОМН-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
Ţ.	OMH-RLK29	Mounting bracket
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-RL28-C	Weld slag cover model

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Timer functions

Timer function	Switching type		Receiver exposed Receiver dark
ON ON Without	Light Dark		ON OFF
1 2 3 4	Light		ON OFF
ON I ON delay	Dark	ton ton ton	ON OFF
1 2 3 4	Light		ON OFF
ON OFF delay	Dark	¹ OFF	ON OFF
1 2 3 4	Light	tos tos	ON OFF
ON ON One shot	Dark	tos tos tos	ON OFF

Time $t_{ON},\,t_{OFF}$ and t_{OS} are adjustable from 0.1 to 10 seconds. The Light-/Dark-Switch (Left, outer switch) is shown in the "Dark ON" position.

Туре	Description	Notes
-Z	OFF delay timer	Adjustable time interval
	one shot timer	(0.1 s - 10 s)
	ON delay timer	
	ON delay timer / OFF delay timer	
	ON delay timer / one shot timer	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

