

Background suppression sensor RLK28-8-H-400-RT-Z/31/116



- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
- Good alignability due to red transmission LED
- Programmable time function GAN, GAB, IAB and GAN-IAB as double function
- Version for universal voltages

Background suppression sensor












Dimensions

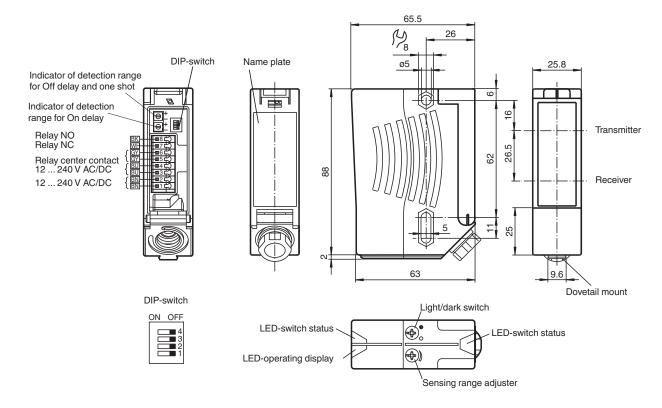



Technical Data

General specifications Detection range 20 ... 400 mm Detection range min. 20 ... 150 mm Detection range max. 20 ... 400 mm Adjustment range 150 ... 400 mm Background suppression max. + 10 % of the upper limit of the detection range Light source modulated visible red light, 660 nm Light type Black-white difference (6 %/90 %) < 10 % approx. 12 mm at a distance of 400 mm Diameter of the light spot Opening angle Emitter 1.2°, Receiver 2° Ambient light limit 50000 Lux Functional safety related parameters MTTF_d 620 a Mission Time (T_M) 20 a Diagnostic Coverage (DC) 0 % Indicators/operating means Operation indicator LED green Function indicator 2 LEDs yellow ON: object inside the scanning range OFF: object outside the scanning range Control elements Sensing range adjuster, Light-on/dark-on changeover switch **Electrical specifications** 12 ... 240 V AC/DC Operating voltage U_{B} P_0 Power consumption ≤ 3.5 VA Output Switching type light/dark on, switchable (selectable, light/dark switching is only activated if the receiver has 'dark on' selected.) Signal output Relay, 1 alternator max. 250 V AC/DC Switching voltage Switching current max. 2 A Switching power DC: max. 50 W AC: max. 500 VA 25 Hz Switching frequency Response time ON delay (GAN), OFF delay (GAB), one shot (IAB), ON delay-one shot (GAN-IAB), ON delay-OFF delay (GAN-GAB), programmable adjustment interval 0.1 \dots 10 s Timer function Conformity Product standard EN 60947-5-2 Approvals and certificates Protection class II, rated insulation voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 Output circuit insulated from control circuit in accordance with IEC 61140. Caution! The protection class 2 is only valid when the terminal compartment is closed. E87056, cULus Listed Caution: This equipment is considered as open-type **UL** approval equipment. It must be mounted within an enclosure, that is suitably designed for protection against internal fire and personal injury resulting from accessibility to live parts according UL 508. CCC approval Certified by China Compulsory Certification (CCC)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".



Ambient conditions

Ambient temperature

Storage temperature

Housing width

Housing height

Housing depth

Mechanical specifications

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

25.8 mm

65.5 mm

88 mm

-40 ... 60 °C (-40 ... 140 °F)

-40 ... 60 °C (-40 ... 140 °F)


Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical Data


Degree of protection	IP67
Connection	terminal compartment with 8 spring-loaded terminals for wire cross section 0.5 1.5 mm², insulation stripping 7.5 8.5 mm, M16 x 1.5 cable gland
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	112 g

Connection Assignment

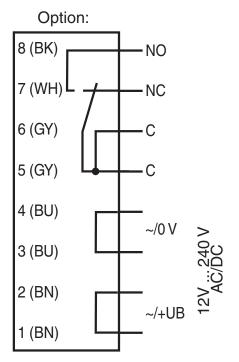


The relay-functions "NC" and "NO" bear on the switching mode "Light-ON".
This complies to the default setting of the light/dark switch, located on top of the housing (factory setting).

Characteristic Curve

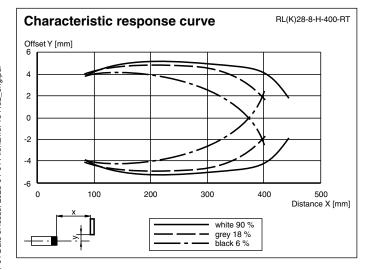

Accessories

6.	ОМН-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-RLK29	Mounting bracket
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-RL28-C	Weld slag cover model

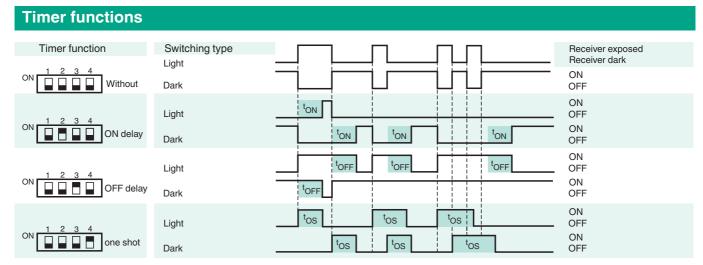

Time t_{ON} , t_{OFF} and t_{OS} are adjustable from 0.1 to 10 seconds. The Light-/Dark-Switch (Left, outer switch) is shown in the "Dark ON" position.

Туре	Description	Notes
-Z	OFF delay timer	Adjustable time interval
	one shot timer	(0.1 s - 10 s)
	ON delay timer	
	ON delay timer / OFF delay timer	
	ON delay timer / one shot timer	