# Photoelectric slot sensor



**Model Number** 

**Features** 

•

•

•

GL220-LAS/32/40a/98a

Photoelectric slot sensor with 3-pin, M8 x 1 connector

High resolution

High switching frequency

Sturdy aluminum housing

Light/dark switching

Alignable housing Adjustable sensitivity


**Product information** 

Photoelectric slot sensors with laser light can


be used in applications with specific, demanding requirements and are ideal for

highly precise and extremely fast applications. These eye-safe laser devices stand out through attributes that include particularly high switching frequencies of 10 kHz, maximum repeatability of 0.01 mm, automatic signal threshold adjustment, and detection of and/or light transmission through semi-transparent objects. In addition, the devices fea-

ture cross-talk protection, which enables devices to be installed adjacent to each other despite very high switching frequency.

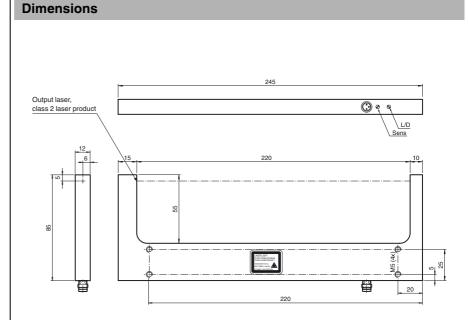

#### **Electrical connection**




= Dark on

**Pinout** 



### Indicators/operating means



1	Functional display	yellow	
2	Sensitivity adjuster		
3	Light-/dark switch		

Pepperl+Fuchs Group www.pepperl-fuchs.com USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical	data
recimical	uata

Technical data					
General specifications					
Light source		laser diode			
Light type		red			
Laser nominal ratings					
Note		LASER LIGHT , DO NOT STARE INTO BEAM			
Laser class		2			
Wave length		650 nm			
Beam divergence		2.6 mrad			
Maximum optical power output		< 1 mW			
Target size		0.05 mm			
Fork width		220 mm			
Ambient light limit		10000 Lux			
Hysteresis	н	< 0.02 mm			
Indicators/operating means					
Function display		LED yellow 4 x			
Controls		Sensitivity adjuster, light/dark switch			
Electrical specifications					
Operating voltage	U <sub>B</sub>	10 30 V DC			
No-load supply current	I <sub>0</sub>	45 mA			
Output	·U	-			
Switching type		light/dark on			
Signal output		1 PNP output, short-circuit protected, reverse polarity protected,			
Cigital output		open collector			
Switching voltage		max. 30 V DC			
Switching current		max. 200 mA			
Voltage drop	Ud	2.5 V (200 mA)			
Switching frequency	f	10000 Hz			
Response time		50 µs			
Ambient conditions					
Ambient temperature		-10 60 °C (14 140 °F)			
Mechanical specifications					
Protection degree		IP65			
Connection		M8 connector, 3-pin			
Material					
Housing		black anodized aluminum			
Optical face		glass			
Installation		may be mounted in rows			
Mass		30 g			
Compliance with standards and	directi	-			
ves	anoon				
Directive conformity		EMC Directive 2004/108/EC			
Standard conformity					
Product standard		EN 60947-5-2:2007			
		IEC 60947-5-2:2007			
Laser class		IEC 60825-1:2007			
Approvals and certificates					
CCC approval		CCC approval / marking not required for products rated ${\leq}36~\text{V}$			
Laser notice laser class	2				
		tion conscielly in a dark onvironment. Do not point			
• The irradiation can lead to irritation especially in a dark environment. Do not point					
at people!					
Caution: Do not look into the beam!					
Maintenance and repairs should only be carried out by authorized service person-					
nel!					
<ul> <li>Attach the device so that the warning is clearly visible and readable.</li> </ul>					
Caution – Use of controls or adjustments or performance of procedures other than					
		It in hazardous radiation exposure.			
·	-	·			

#### Laserlabel



# Accessories

V3-GM-2M-PUR Cable socket, M8, 3-pin, PUR cable

## V3-WM-2M-PUR

Cable socket, M8, 3-pin, PUR cable

Other suitable accessories can be found at www.pepperl-fuchs.com

PEPPERL+FUCHS

Singapore: +65 6779 9091

fa-info@sg.pepperl-fuchs.com

fa-info@us.pepperl-fuchs.com

fa-info@de.pepperl-fuchs.com

www.pepperl-fuchs.com