

Retroreflective sensor MLV41-55/40a/92/102/126b



- Rugged series in corrosion-resistant metal housing
- Extremely high switching frequency
- Clear and functional display concept for the operating modes
- Resistant against noise: reliable operation under all conditions
- Aluminum housing with high quality Delta-Seal coated


Robust retroreflective sensor with polarization filter, compact housing design, 8 m detection range, red light, light/dark on, NPN output, weak signal output, M12 plug

Function

The unique and extremely popular design of the MLV41 series enables it be mounted correctly in confined areas and offers all the functions that are normally only found on larger phototelectric sensors. The MLV41 series comes with a range of functions. For example, highly visible status LEDs on the front and back, resistance to ambient light, crosstalk protection and universally applicable output stages that permit every possible switching logic and polarity to be realized. The enhanced resistance to ambient light ensures reliable operation even where modern energy-saving lamps with electronic ballasts are in use. The same applies where multiple devices are present, i.e. the use of a number of sensors in the same vicinity causes no problems.



Dimensions

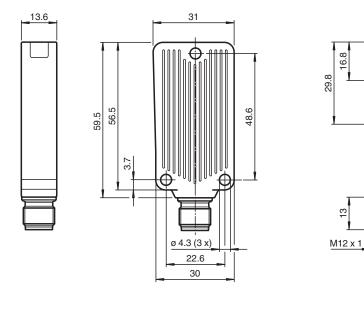



Technical Data

General specifications	
Effective detection range	0 8 m
Reflector distance	0.1 8 m
Threshold detection range	10 m
Reference target	H85-2 reflector
Light source	LED
Light type	modulated visible red light , 625 nm
Polarization filter	yes
Angle deviation	max. ± 1.5 °
Diameter of the light spot	approx. 300 mm at detection range 8.5 m
Opening angle	1.5 °
Optical face	frontal
Ambient light limit	20000 Lux
Functional safety related parameters	
MTTF _d	844 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %
Indicators/operating means	
Operation indicator	LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator	LED yellow, lights up when light beam is free, flashes when falling short of the operating reserve

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

2

Technical Data		
Control elements		rotary switch for light/dark
Electrical specifications		
Operating voltage	U _B	10 30 V DC
Ripple		max. 10 %
No-load supply current	I ₀	max. 30 mA
Output		
Stability alarm output		1 NPN function reserve output (alarm), short-circuit protected, reverse polarity protected, open collector
Switching type		light/dark on switchable
Signal output		1 NPN output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Voltage drop	U_d	≤ 2.5 V DC
Switching frequency	f	1000 Hz
Response time		0.5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
UL approval		cULus Listed 57M3 (Only in association with UL Class 2 power supply; Type 1 enclosure)
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 60 °C (-40 140 °F)
Storage temperature		-40 75 °C (-40 167 °F)
Mechanical specifications		
Housing width		31 mm
Housing height		56.5 mm
Housing depth		13.6 mm
Degree of protection		IP67
Connection		4-pin, M12 x 1 connector
Material		
Housing		Aluminum, Delta-Seal coated
Optical face		glass pane
Connector		metal
Mass		50 g

Connection



0	ption:	102/126b
1	— +UB	
2	<u> </u>	Alarm
3	o v	
4	Q	

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 Get

 www.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com

0	=	Li	gl	nt	on


= Dark on

Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

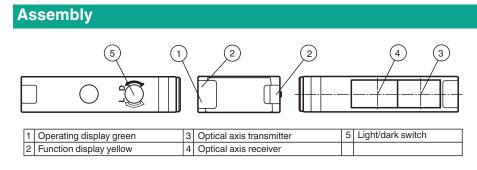

Characteristic Curve

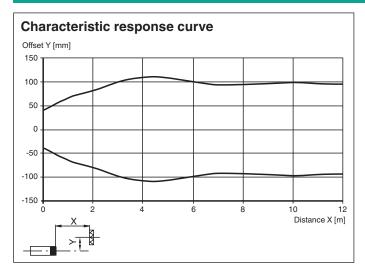


Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

4

Retroreflective sensor

Characteristic Curve

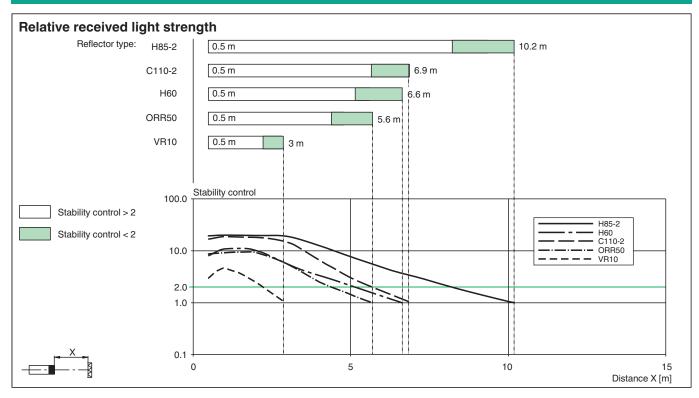

Accessories

OMH-09Mounting bracket for Sensors series MLV41 for M12 rod mountingOMH-40Mounting bracketV1-G-2M-PURFemale cordset single-ended M12 straight A-coded, 4-pin, PUR cable greyV1-W-2M-PURFemale cordset single-ended M12 angled A-coded, 4-pin, PUR cable greyMethodsREF-H85-2REF-H85-2Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes	
V1-G-2M-PUR Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey V1-W-2M-PUR Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey Image: REF-H85-2 Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes	
V1-W-2M-PUR Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey REF-H85-2 Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes	
REF-H85-2 Reflector, rectangular 84.5 mm x 84.5 mm, mounting holes	
REF-H50 Reflector, rectangular 51 mm x 61 mm, mounting holes, fixing strap	
REF-VR10 Reflector, rectangular 60 mm x 19 mm, mounting holes	
ORR50G Reflector, rectangular 50.9 mm x 60.9 mm, mounting holes, fixing strap and polarization filter	
OFR-100/100 Reflective tape 100 mm x 100 mm	

Refer to "General Notes Relating to PepperI+Fuchs Product Information"

5