# AS-Interface gateway

# VBG-PB-K20-DMD-EV1



# 

# **Electrical connection**

Dimensions


#### Model number

#### VBG-PB-K20-DMD-EV1


PROFIBUS Gateway, double master for 2 AS-Interface networks

#### Features

- Connection to PROFIBUS DP
- 2 AS-Interface networks
- PROFIBUS DP V1 support
- Easy commissioning and fault diagnosis via LEDs and graphic display
- Dublicate addressing detection
- Earth fault detection
- AS-Interface noise detection
- Ethernet diagnostic interface

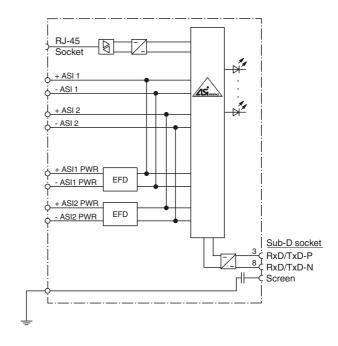

## Indicating / Operating means

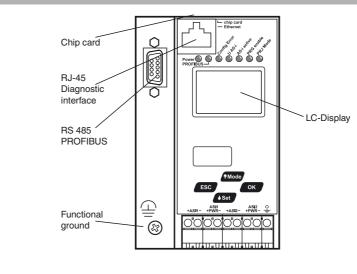



 Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 O

 Pepperl+Fuchs Group
 USA: +1 330 486 0001

 www.pepperl-fuchs.com
 fa-info@us.pepperl-fuchs.com

0001 Germany: +49 621 776 4411 chs.com fa-info@de.pepperl-fuchs.com

411 Singapore: +65 6779 9091 .com fa-info@sg.pepperl-fuchs.com



### AS-Interface gateway

#### **Technical data**

lecnnical	data		
General specif	ications		
AS-Interface s	specification		V3.0
PLC-Function	ality		activateal
Duplicate add	ress detection		from AS-I
Earth fault det	ection	EFD	integrated
EMC monitori	ng		integrated
Diagnostics fu	Inction		Extended
UL File Numb	er		E223772
Indicators/ope	erating means		
Display			Illuminate sages
LED PROFIBI	JS		PROFIBL
LED AS-i ACT			AS-Interfa
LED CONFIG			configura
LED PRG EN	ABLE		autom. pr
LED POWER			voltage O
LED PRJ MO	DE		projecting
LED U AS-i			AS-Interfa
Button			4
Switch SET			Selection
OK button			Mode sel
Button MODE			Mode sel
ESC button			Mode sel
Electrical spec	cifications		
Insulation volt	age	Ui	$\geq$ 500 V
Rated operation	ng voltage	U <sub>e</sub>	from AS-I
Rated operation	ng current	Ι <sub>e</sub>	≤ 200 mA ≤ 200 mA ≤ 270 mA
Interface 1			
Interface type			RS-485
Protocol			PROFIBL
Transfer rate			9.6 kBit/s
Interface 2			
Interface type			RJ-45 Eth
			Program
Interface 3			
Interface type			Chip carc
Connection			
PROFIBUS			Sub-D int
Ethernet			RJ-45
AS-Interface			spring ter
Directive confe	ormity		
Electromagne	tic compatibility		
Directive 20	14/30/EU		EN 62026
Standard conf	ormity		
Electromagne	tic compatibility		EN 6100
Degree of pro	tection		EN 60529
AS-Interface			EN 62026
Ambient cond	itions		
Ambient temp	erature		0 55 °C
Storage tempe			-25 85
Mechanical sp			
Degree of pro			IP20
Material			11 20
Housing			Stainless
Mass			460 g
Construction t	vpe		Low profi
Construction	.162		2011 prom

#### Notes

In an AS-Interface network only one device can be operated earth fault detection. If there are many devices in an AS-Interface network, this can lead to the earth fault monitoring response threshold becoming less sensitive.

V3.0
activateable
from AS-Interface slaves
integrated
integrated
Extended function via display
E223772
Illuminated graphical LC display for addressing and error sages
PROFIBUS master detected; LED green
AS-Interface operation normal; LED green
configuration error; LED red
autom. programming; LED green
voltage ON; LED green
projecting mode active; LED yellow
AS-Interface voltage; LED green
4
Selection and setting of a slave address
Mode selection traditional-graphical/confirmation
Mode selection PRJ-operation/save configuration/cursor
Mode selection traditional-graphical/cancel
≥ 500 V
from AS-Interface
$\leq$ 200 mA off AS interface network 1 $\leq$ 200 mA off AS interface network 2 $\leq$ 270 mA in total
RS-485
PROFIBUS in accordance with IEC 61158/IEC 61784-1
9.6 kBit/s / 12 MBit/s , Automatic baud rate detection
RJ-45 Ethernet Programming and diagnostics interface
Chip card slot
Sub-D interface RJ-45

rminals, removable

e-2:2013 EN 61000-6-2:2005. EN 61000-6-4:2007

0-6-2:2005. EN 61000-6-4:2007 9.2000 26-2:2013

C (32 ... 131 °F) °C (-13 ... 185 °F)

steel ile housing

# Function

mes-

The VBG-PB-K20-DMD-EV1 is a PROFIBUS gateway with a double master according to AS-Interface specification 3.0.

The design of the K20 in stainless steel with IP20 is particularly suited for use in switching cabinets for snap on mounting on the 35 mm mounting rail.

The gateway in accordance with the AS-Interface specification V 3.0 is used to connect AS-Interface systems to a higher-level net. It acts as a master for the AS-Interface segment and as a slave for the higher-level net. During cyclic data exchange, the digital data of an AS-Interface segment is transferred.

The address allocation and acceptance of the target configuration can be achieved via the keys. 7 LEDs fitted to the front panel indicate the actual state of the AS-Interface branch.

With the graphical display, the commissioning of the AS-Interface circuits and testing of the connected peripherals can take place completely separately from the commissioning of the higher-level network and the programming. With the 4 switches, all functions can be controlled and visualized on the display.

The port provides a way of exporting data relating to the gateway, network and operation directly from the gateway for extended local diagnosis purposes.

Via the RJ-45 Ethernet diagnostic interface, up to 31 devices can establish a secure cross-communication.

The device has a card slot for a memory card for the storage of configuration data.

The redundant power supply guarantees that the double master remains in function and is diagnosticable, when a failure of a power supply unit in one of the two AS-interfaces circles occures. Also communication with the superior field bus is not disturbed by the failure of a power supply.

#### SPS Functionality

Optionally the gateway is also available with PLC functionality. Therefor you can order a code key VAZ-CTR3 additionally. The programming language is ANSI-C. A compiler is available as plug-in for ECLIPSE environment.

### Accessories

# VAZ-SW-ACT32

Full version of the AS-I Control Tools including connection cable

VAZ-PB-SIM **PROFIBUS** master simulator

VAZ-PB-DB9-W **PROFIBUS Sub-D Connector with** switchable terminal resistance

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

fa-info@sg.pepperl-fuchs.

Singapore: +65 6779 9091



2